


DENON


Hi-Fi Stereo Amplifier

SERVICE MANUAL

MODEL DCA-3500 DCA-3400

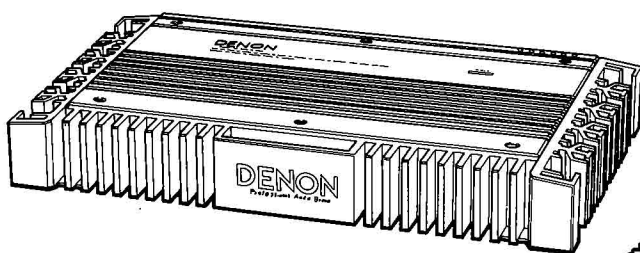

DCA-3500

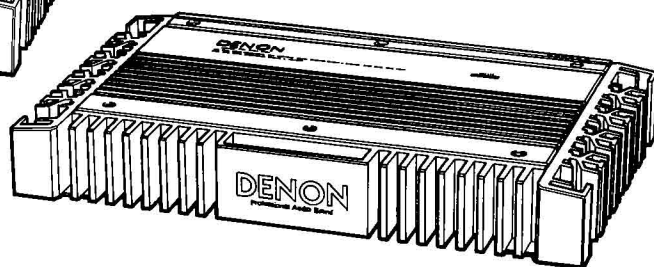

DCA-3400

CONTENTS

FEATURES	2
SPECIFICATIONS	2
CONNECTIONS	3
CIRCUIT DESCRIPTIONS	4,5
BLOCK DIAGRAM	6
METHOD OF ADJUSTMENTS	7
PRINTED WIRING BOARD AND PARTS LIST	8~17
WIRING DIAGRAM	18,19
EXPLODED VIEW AND PARTS LIST	20~23
SEMICONDUCTORS	24
SCHEMATIC DIAGRAM	25,26
REMOVAL OF EACH SECTIONS	27,28

NIPPON COLUMBIA CO., LTD.

FEATURES

• DCA-3500

- 3/5 Channel Power Amplifier with Built-in Subwoofer Drive.
Maximum Power Output
5 Channel 40 W x 4 + 80 W (Subwoofer)
(1 kHz/4 ohms, T.H.D. 1%)
3 Channel 80 W x 2 + 80 W (Subwoofer)
(1 kHz/4 ohms, T.H.D. 1%)
- Non-Negative Feedback Amplification.
- Non-Switching Class-A Amplification.
- Subwoofer Amplifier with Crossover Network.
- "Compact Star"™ Convection Cooling Heatsinks
- DC Power Terminal Block connections are quick and secure.
- Pulse Regulated Power Supply
- Ground Isolation Amplifier
- Remote Power On/Off
- Variable Input Sensitivity
- Convenient Power Indicator
- Built-in Protector
- Gold-Plated RCA-type Inputs.

• DCA-3400

- 2/4 Channel Power Amplifier
Maximum Power Output
4 Channel 40 W x 4 (1 kHz/4 ohms, T.H.D. 1%)
2 Channel 80 W x 2 (1 kHz/4 ohms, T.H.D. 1%)
- Non-Negative Feedback Amplification.
- Non-Switching Class-A Amplification.
- "Compact Star"™ Convection Cooling Heatsinks.
- DC Power Terminal Block connections are quick and secure.
- Pulse Regulated Power Supply.
- Ground Isolation Amplifier.
- Remote Power On/Off
- Variable Input Sensitivity.
- Convenient Power Indicator.
- Built-in Protector
- Gold-Plated RCA-type Inputs.

SPECIFICATIONS

Power Output	
5-Channel	40 W x 4 + 80 W in to 4 ohms, 1 kHz at 1% T.H.D.
3-Channel	80 W x 2 + 80 W in to 4 ohms, 1 kHz at 1% T.H.D.
Power Output	
5-Channel	28 W x 4 + 60 W from 20 Hz to 20 kHz with 0.05% T.H.D.
Frequency Response	5 Hz — 200 kHz (—3 dB)
Subwoofer Crossover	80 Hz/120 Hz Selectable High cut —18 dB/oct Low cut —12 dB/oct
Signal to Noise Ratio	90 dB (IHF A Weighted)
Input Sensitivity/Impedance	200 mV — 2 V (Variable)/10 k ohms
Speaker Impedance	4 ohms
Dimensions (W x H x D)	400 mm x 53 mm x 214 mm (15-3/4" x 2-3/32" x 8-27/64")
Weight	4.5 kg (9 lbs 15 oz)

Power Output	
4-Channel	40 W x 4 into 4 ohms, 1 kHz at 1% T.H.D.
2-Channel	80 W x 2 into 4 ohms, 1 kHz at 1% T.H.D.
Power Output	
4-Channel	28 W x 4 from 20 Hz to 20 kHz with 0.05% T.H.D.
Frequency Response	5 Hz — 200 kHz (—3 dB)
Signal to Noise Ratio	90 dB (IHF A Weighted)
Input Sensitivity/Impedance	200 mV — 2 V (Variable)/10 k ohms
Speaker Impedance	4 ohms
Dimensions (W x H x D)	365 mm x 53 mm x 214 mm (14-3/8" x 2-3/32" x 8-27/64")
Weight	3.9 kg (8 lbs 10 oz)

Design and Specifications are subject to change for improvement without prior notice.

After the DENON Power Amplifier DCA-3500 and 3400 is securely installed, make the connections as follows.

* Remove the ground cable (—) from the battery before installation to prevent damage to unit or the automobile's electrical system by miss-connection.

1) Connect the pre-out from your component to the input of DCA-3500 and 3400.

2) Connect the speaker wires to the speaker terminals of DCA-3500 and 3400.

* Make sure the polarity of left and right speaker line is observed.

* Never connect the negative (—) sides of each speaker together.

* Never make the plus and minus wire short-circuit.

* Never connect the negative (—) side to the car chassis.

3) Secure the ground wire to a clean bare metal spot on the car chassis. Make sure paint or coating is scraped away for best connection.

(The wire gauge should be 10 ~ 12AWG.)

4) Connect the remote cord to the remote control terminal of your indash player.

(The wire gauge should be 18AWG.)

5) Connect the ACC cord to the ignition terminal.

(The wire gauge should be 18AWG.)

6) Connect the battery cord directly to the positive (+) terminal of battery.

(The wire gauge should be 10 ~ 12AWG.)

* Connect both battery cords (BATT 1, BATT 2) and both ground cords (GND 1, GND 2).

* Make all connections securely to prevent noise. Bind up the cords by tape after connection.

* Confirm again that your connection follows this instruction manual, re-install the parts of your automobile as they were and re-connect the negative (—) cable to the negative (—) terminal of the battery.

* If your indash player does not have a remote terminal, consult your DENON Dealer for alternate hook up.

* Filter select switch (DCA-3500 only)

The FILTER select switch permits the cutoff frequency of the Crossover Network to be switched from 80 Hz to 120 Hz or OFF. Set the switch in the desired position.

If the system is used with the filter select switch set in the OFF position, then reverse the polarity of the subwoofer speaker connection.


DENON

Hi-Fi Stereo Amplifier


SERVICE MANUAL

SUPPLEMENT

MODEL DCA-3500 DCA-3400

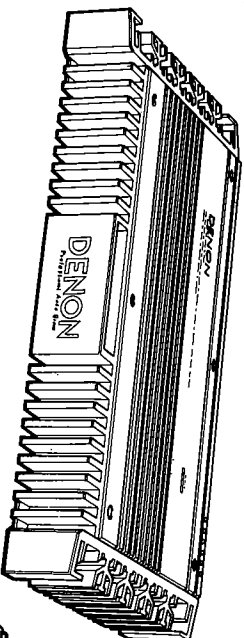

DCA-3500

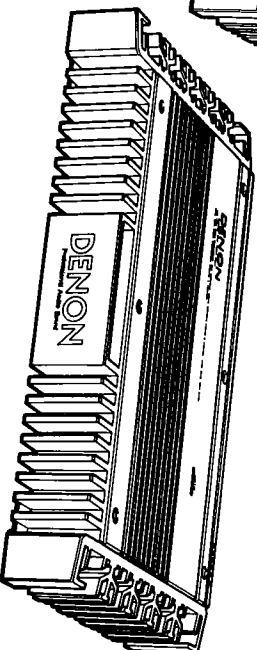


DCA-3400

The name of model appears on the cover of this service manual will make a change purposing further improvements.
Please prepare this sheet and the original service manual (Service Manual No. 0056) at the time of serviceing.
Serial No. 7032600001~


BLOCK DIAGRAM

- DCA-3400

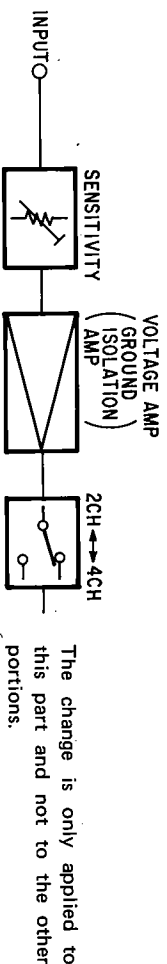

NIPPON COLUMBIA CO., LTD.

• DCA-3500

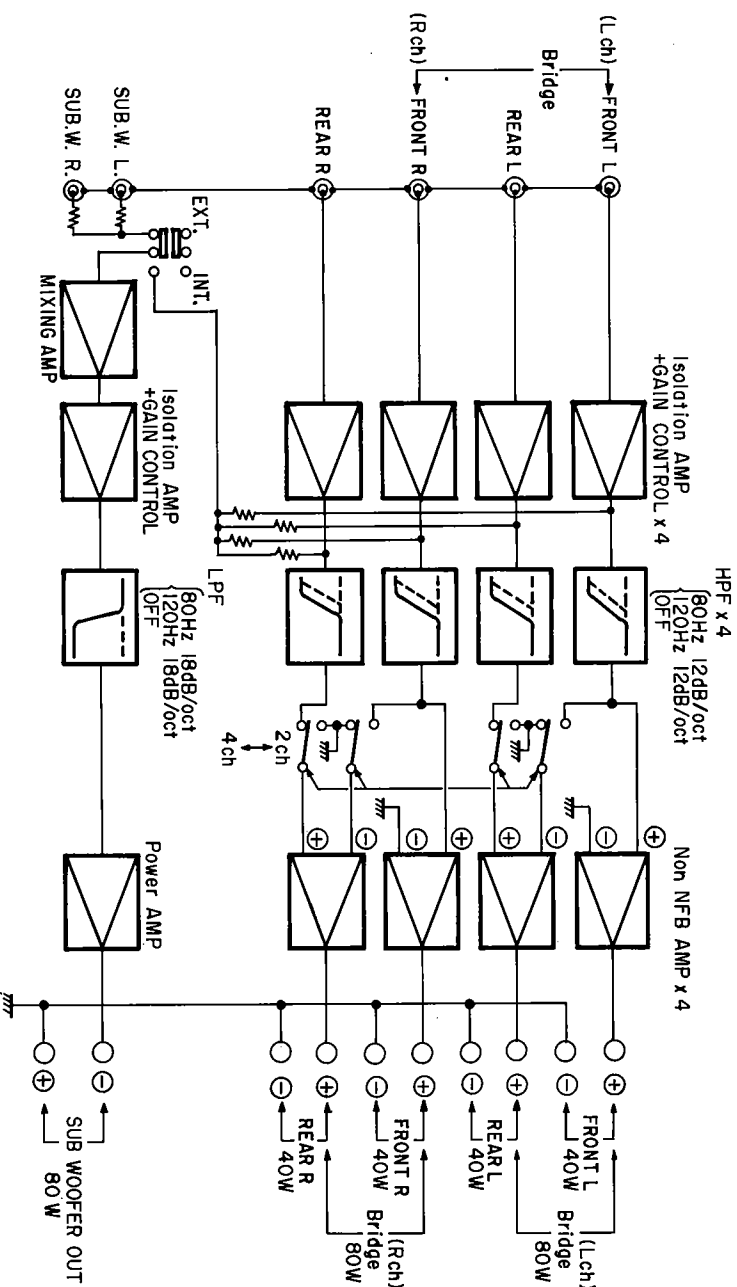

The Changing Parts in the Parts List (DCA-3500)

1U-1453 POWER AMP. UNIT PARTS LIST


Ref. No.	Part No.	Part Name & Descriptions	Ref. No.	Part No.	Part Name & Descriptions
RESISTORS			CAPACITORS		
R618,619	2412401075	22 kohm ±5% 1/4W Carbon (Delete)	C611,612	2544256004	10μF ±20% 25V Electrolytic (Delete)
R670~673	2412405000	510 kohm ±5% 1/4W Carbon (Add)	C612	2544256004	10μF ±20% 25V Electrolytic (Add)
			C402	2544252037	100μF ±20% 10V Electrolytic (Add)

1U-1432 P. SUPPLY UNIT PARTS LIST

Ref. No.	Part No.	Part Name & Descriptions
RESISTORS		
R451	2412400050	6.8 kohm ±5% 1/4W Carbon (Add)

NIPPON COLUMBIA CO., LTD.
14-14, 4CHOME AKASAKA,
MINATO-KU, TOKYO 107 JAPAN


TEL: 03-584-8111
TLX: JAPANOLA J2591
CABLE: NIPPONCOLUMBIA TOKYO

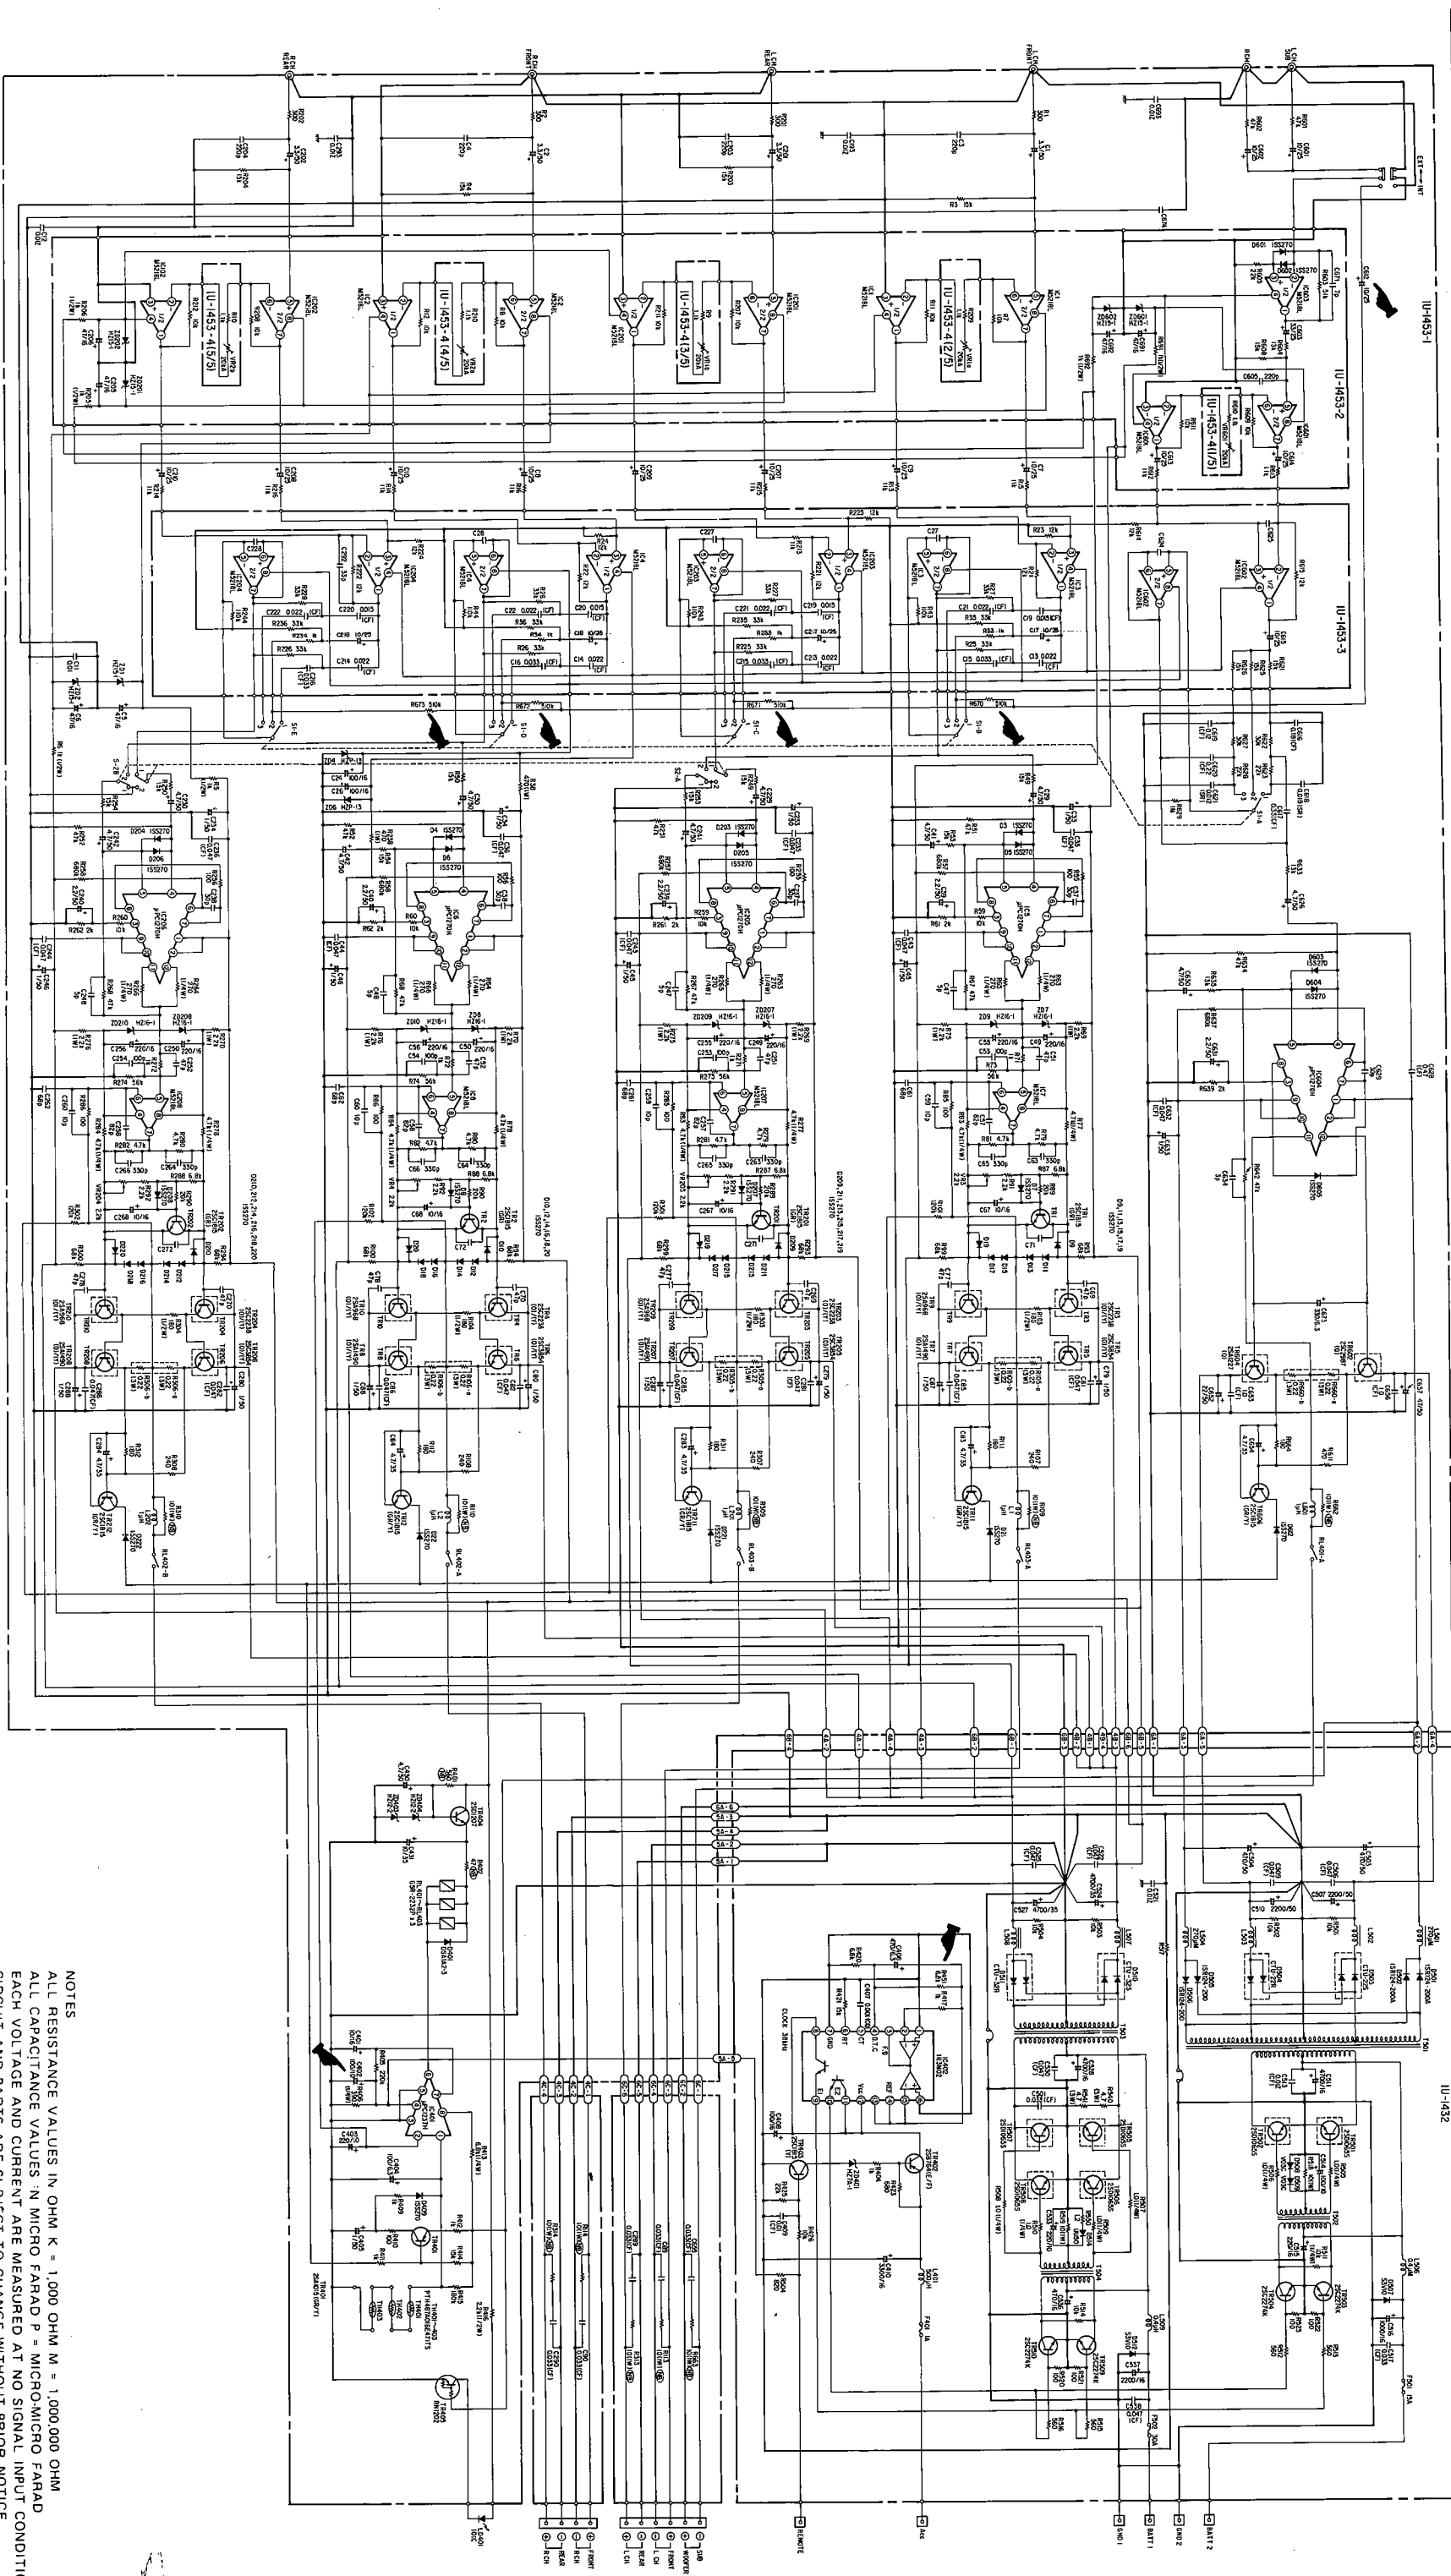



ALL RESISTANCE VALUES IN OHM K = 1,000 OHM M = 1,000,000 OHM
ALL CAPACITANCE VALUES IN MICRO FARAD P = MICRO-MICRO FARAD
EACH VOLTAGE AND CURRENT ARE MEASURED AT NO SIGNAL INPUT CONDITION.
CIRCUIT AND PARTS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

CONNECTIONS

• DCA-3500

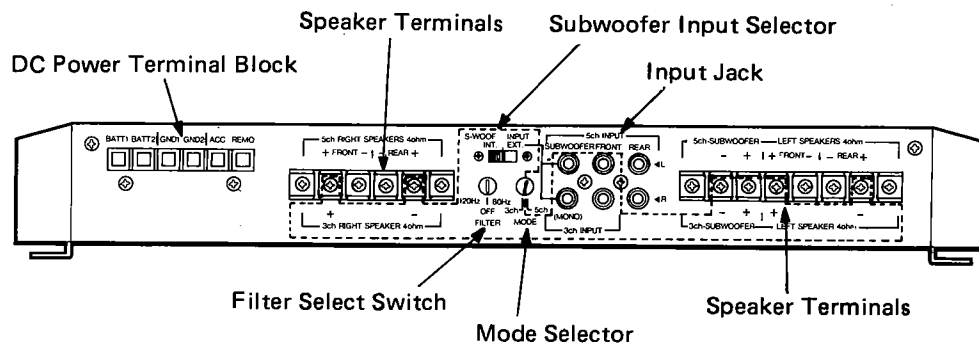

• DCA-3400

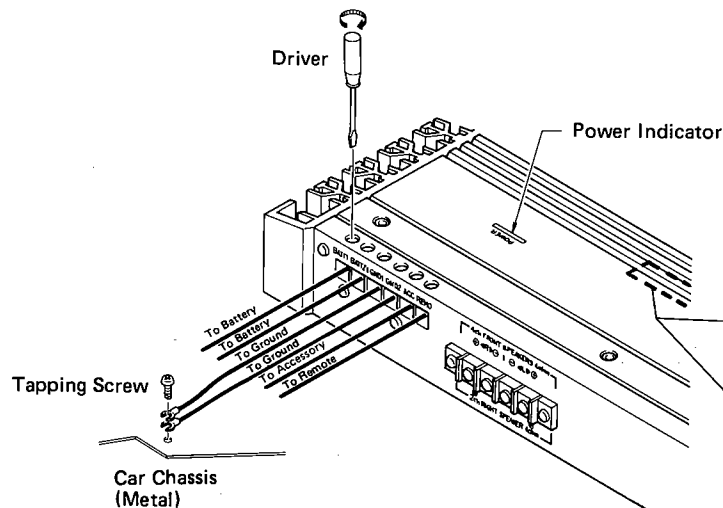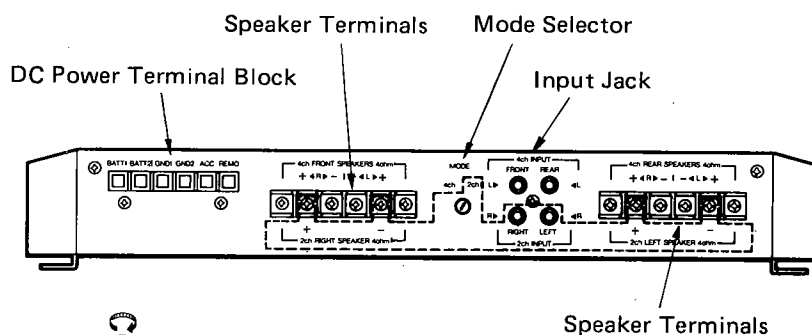

DCA-3500

INPUT SENSITIVITY			
	LOW HIGH		
5ch	REAR	FRONT	SUBWOOFER
3ch	—	L/R	SUBWOOFER

DCA-3400

INPUT SENSITIVITY			
	LOW HIGH		
4ch	REAR	FRONT	
2ch	LEFT	RIGHT	
	LOW HIGH	LOW HIGH	

Please use the optional cord kit AK-110 or AK-140, available from your dealer.

	AK-110	AK-140
2P RCA PIN-PIN CORD	1.5 m	5 m (GOLD PLATE)
ACC CORD	1.5 m	5 m
BATTERY CORD	2 m	6 m
REMOTE CORD	1.5 m	5 m
Y TYPE REMOTE CORD	0.1 m	0.1 m

Tighten the GROUND, BATTERY and REMOTE wires securely by inserting a supplied screwdriver in the round holes on the top of the panel. 5 mm is appropriate for the length of the inner, stripped wire.

CIRCUIT DESCRIPTION

• DCA-3500


1. Ground Isolation Amplifier

DCA-3500 utilizes a ground isolation amplifier intended to eliminate ignition and alternator noises of vehicle that are coming in to the power amplifier with the input signal and the ground line.

This circuit is shown in the following figure.

Only the case when it becomes $Z_1 = Z_2$, $Z_1 f = Z_2 f$ in this circuit, the output will become $e_o = Z_1 f / Z_1 e_i$, thus no noise " e_n " contained in the output.

Since DCA-3500 selecting the input sensitivity by the voltage amplifier, Z_1 and Z_2 values can be changed by the switch.

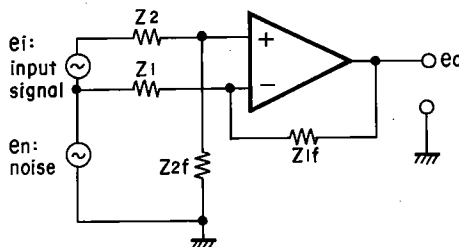

2. DC-DC Converter

When the REMOTE and ACCESSORY terminal of DCA-3500 is applied a voltage, a voltage will be applied to pin 11 and 12 of IC402. The output of a square wave oscillated by C407 and R421 connected at pins 5 and 6 will be conveyed to pin 9 and 10 to switch TR503, TR504, TR509 and TR510. This output will go through the primary of T502 and T504 to the power stage (TR501, TR502, TR505, TR506, TR507 and TR508) in the secondary side of T502 and T504. After amplification, it will pass through the primary of T501 and T503 and be applied to a rectifying circuit in the secondary side to get DC power voltage. This power voltage is $\pm 28V$ and $\pm 30V$.

3. Protector

DCA-3500 employs a built-in protector to protect the amplifier and speaker against damaging in an abnormal condition. This protector works in the following three abnormal conditions.

1. Excessive current flow at speaker terminal due to terminal short.
2. Extraordinary voltage rise at speaker terminal.
3. Excessive temperature rise of heat sink.

For the protection, IC101 is used. A voltage applied to pin 1 or 2 of IC401 rises and exceeds the detecting value, the relay drive stage in IC turns OFF and breaks the relay of power amplifier output point, accordingly to cut the output power to the speaker.

When the amplifier returns to normal condition and a voltage at pin 1 and 2 of IC401 becomes lower than the detecting value, the relay driver stage in IC automatically turns ON and energizes the relay of power amplifier output point, thus delivering the output power to the speaker.

a) Overload Detector

When excessive current flows at speaker terminal, a voltage applied to the emitter resistor of the power transistor in the last stage will go up and turn ON TR606 or TR11 or TR221 or TR12. Then TR212 will turn ON, and a voltage at pin 1 of IC401 rises and exceeds the detecting value, causing to cut the output power to the speaker.

b) DC Detector

If there is existing a DC voltage at + or - speaker terminal of either channel, a voltage divided by R418, R419 and R420 will apply to pin 2 of the protecting IC. At the same time, the other channel speaker terminal is imaginarily grounded. Meanwhile, if a voltage at pin 2 exceeds the detecting value, the output power will not be delivered to the speaker terminal.

c) Thermal Detector

A voltage divided by R415, posistor TH401, TH402, TH403 and TH404 is applied to pin 1 of IC401 through D411. In normal temperature, the resistance value of the posistor is lesser, but when the temperature rises and exceeds to a certain extent, the value rapidly turns to great. For this reason, when the temperature goes up, the voltage at pin 1 will increase and at a certain temperature, the voltage exceeds the detecting value of pin 1 and the output to the speaker will be cut.

4. ON/OFF Mute

DCA-3500 employs a function to detect a pop originating from power on/off and cuts the output power to the speaker terminal by the relay. This function is also performed by IC401.

At the time of turning on the power, the time constant of R405 and C401 causes to delay voltage rise at pin 7. When it rises to the detecting value, the relay will activate to prevent producing pop.

At the time of turning off the power, pin 4 detects a pop from the REMO terminal through R404 and de-activates the relay to prevent producing pop prior to the discharge of big capacitors C507, C510, C524 and C527 in the power source.

• DCA-3400


1. Ground Isolation Amplifier

DCA-3400 utilizes a ground isolation amplifier intended to eliminate ignition and alternator noises of vehicle that are coming in to the power amplifier with the input signal and the ground line.

This circuit is shown in the following figure.

Only the case when it becomes $Z_1 = Z_2$, $Z_1 f = Z_2 f$ in this circuit, the output will become $e_o = Z_1 f / Z_1 e_i$, thus no noise " e_n " contained in the output.

Since DCA-3400 selecting the input sensitivity by the voltage amplifier, Z_1 and Z_2 values can be changed by the switch.

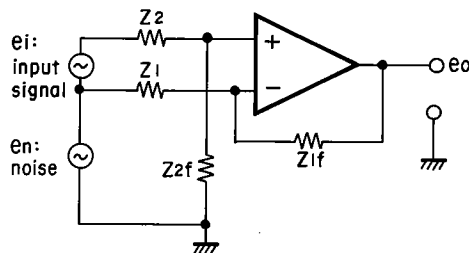

2. DC-DC Converter

When the REMOTE and ACCESSORY terminal of DCA-3400 is applied a voltage, a voltage will be applied to pin 11 and 12 of IC301. The output of a square wave oscillated by C332 and R320 connected at pins 5 and 6 will be conveyed to pin 9 and 10 to switch TR301, TR306, TR353 and TR354. This output will go through the primary of T301 and T351 to power stage (TR301, TR302, TR351 and TR352) in the secondary side of T301 and T351. After amplification, it will pass through the primary of T302 and T352 and be applied to a rectifying circuit in the secondary side to get DC power voltage. This power voltage is $\pm 28V$.

3. Protector

DCA-3400 employs a built-in protector to protect the amplifier and speaker against damage in an abnormal condition. This protector works in the following three abnormal conditions.

1. Excessive current flow at speaker terminal due to terminal short.
2. Extraordinary voltage rise at speaker terminal.
3. Excessive temperature rise of heat sink.

For protection, IC201 is used. A voltage applied to pin 1 or 2 of IC201 rises and exceeds the detecting value, the relay drive stage in IC turns OFF and breaks the relay of power amplifier output point, accordingly to cut the output power to speaker.

When the amplifier returns to normal condition and a voltage at pin 1 and 2 of IC201 becomes lower than the detecting value, the relay driver stage in IC automatically turns ON and energizes the relay of power amplifier output point, thus delivering the output power to speaker.

a) Overload Detector

When excessive current flows at speaker terminal, a voltage applied to emitter resistor of power transistor in last stage will go up and turns ON TR11 or TR111 or TR12 or TR112. Then TR201 will turn ON, and a voltage at pin 1 of IC201 rises and exceeds the detecting value causing to cut the output power to speaker.

b) DC Detector

If there is existing a DC voltage at + or - speaker terminal of either channel, a voltage divided by R61, R161, R62, R162 and R209 will apply to pin 2 of protecting IC. At the same time, the other channel speaker terminal is imaginarily grounded. Meanwhile if a voltage at pin 2 exceeds detecting value the output power will not be delivered to speaker terminal.

c) Thermal Detector

A voltage divided by R207, posistor TH201, TH202 and TH203 is applied to pin 1 of IC201 through D201. In normal temperature the resistance value of posistor is lesser, but when the temperature rises and exceeds to a certain extent, the value rapidly turns to great. For this reason, when the temperature goes up, the voltage at pin 1 will increase and at a certain temperature, the voltage exceeds the detecting value of pin 1 and the output to speaker will be cut.

4. ON/OFF Mute


DCA-3400 employs a function to detect a pop originating power on/off and cuts the output power to speaker terminal by the relay. This function is also performed by IC201.

At the time of turning on the power, the time constant of R210 and C205 causes to delay voltage rise at pin 7. When it rises to the detecting value, the relay will activate to prevent producing pop.


At the time of turning off the power, pin 4 detects a pop from REMO terminal through R211 and de-activate the relay to prevent producing pop prior to the discharge of big capacitors C311, C315, C363 and C366 in the power source.

BLOCK DIAGRAM

• DCA-3500

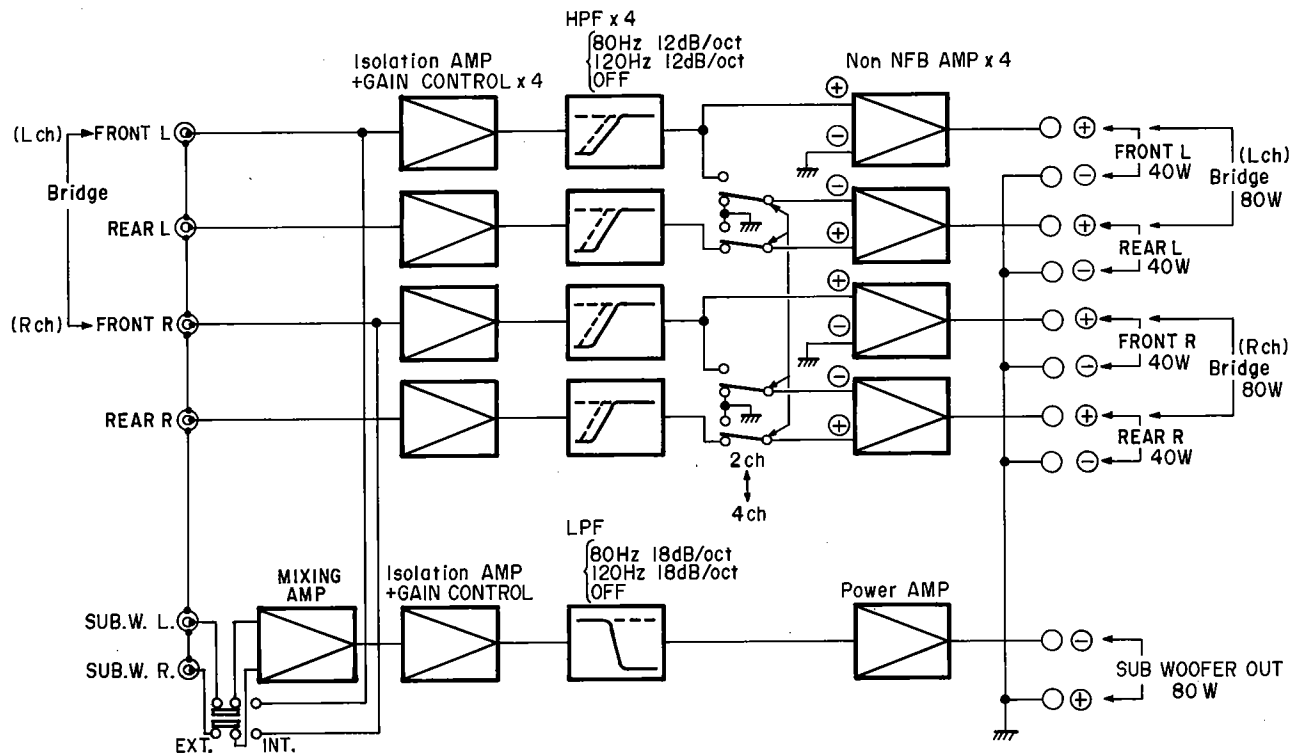

• DCA-3400

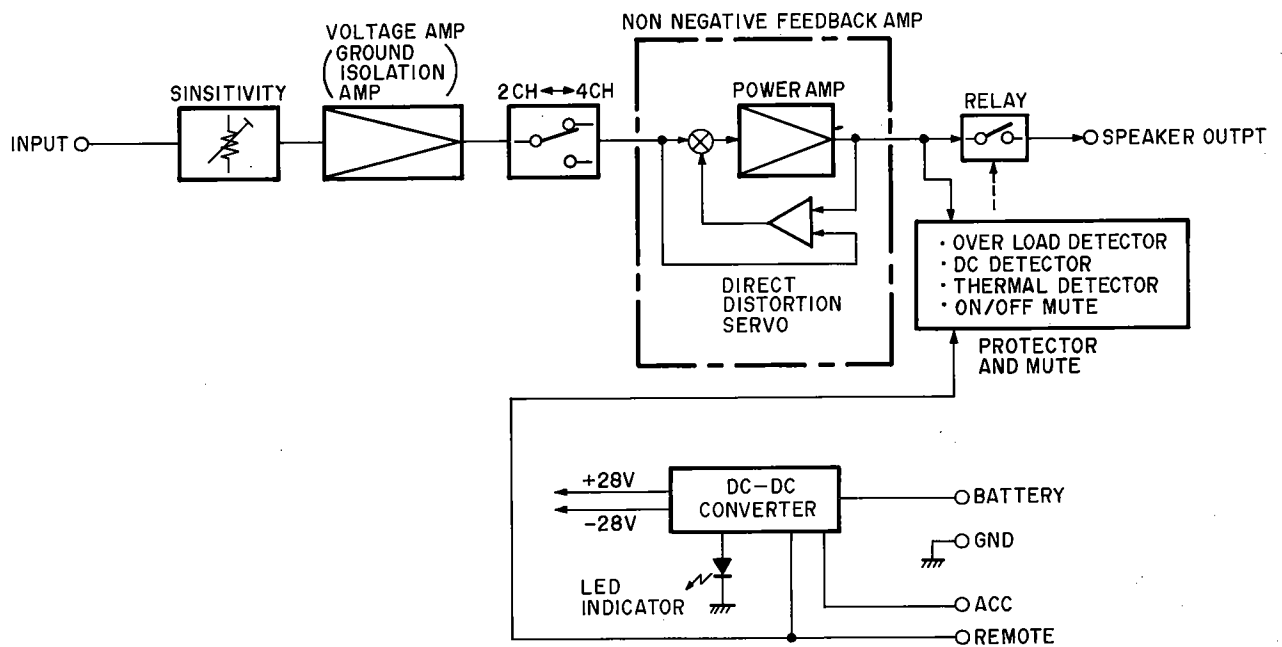

METHOD OF ADJUSTMENTS


When making adjustments, be sure the power supply is at the rated voltage and the room air is in normal condition with respect to temperature and humidity.

Idle Current Adjustment

- **DCA-3500**

Turn on the power and warm up more than five minutes. Obtain 22 mV DC across the emitter resistor (R105, R106, R305 and R306) of last stage power transistors by means of adjusting VR003, VR004, VR203 and VR204. The idle current at this time is 50 mV DC.


The top panel acts as cooling body. Therefore, when turn the power supply on without equipment of the top panel in adjusting idle current case, take care not to supply current more than 3 minutes to avoid the transistor being broken by the overheated. And you could supply power current after the inner cooling body came down as much as normal temperature.

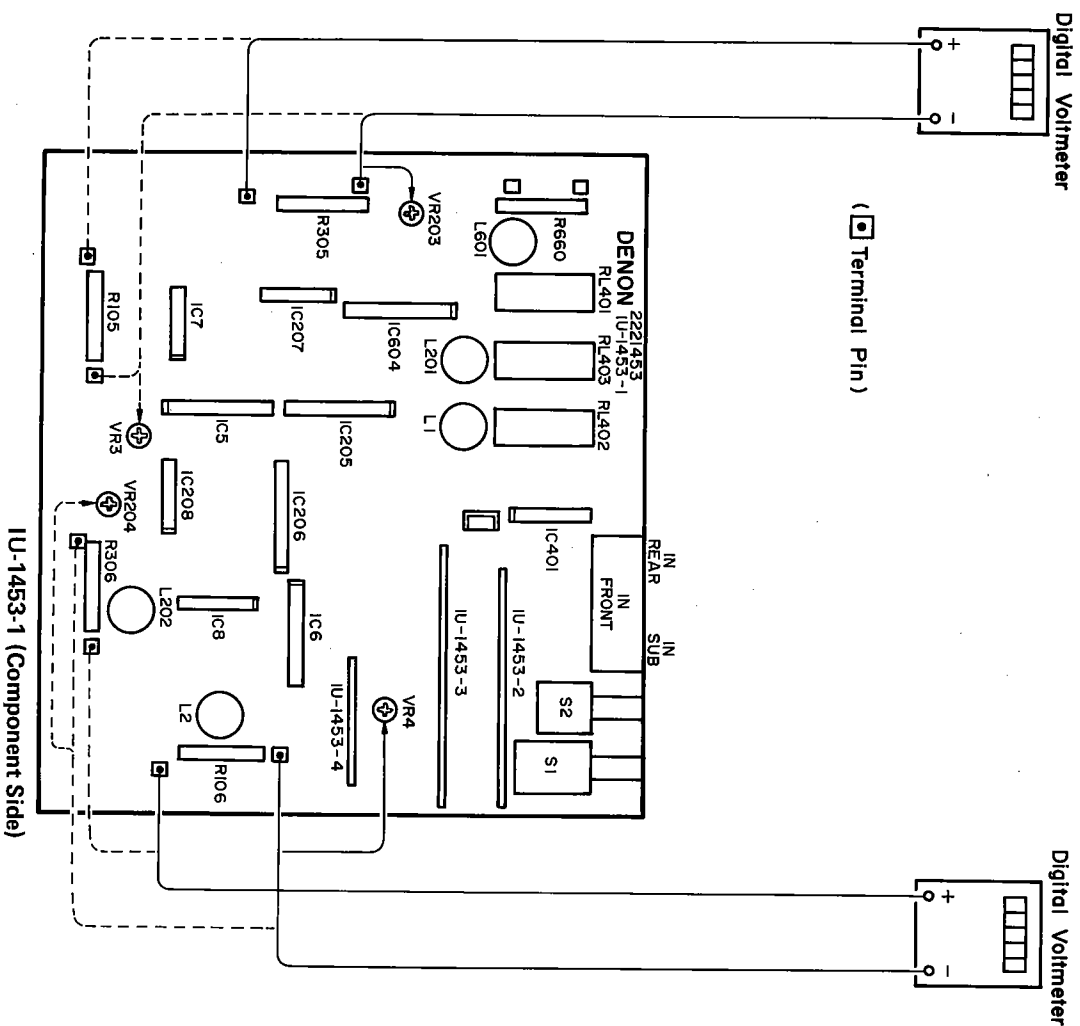

Idle Current Adjustment

- **DCA-3400**

Turn on the power and warm up more than five minutes. Obtain 22 mV DC across the emitter resistor (R65, R66, R165 and R166) of last stage power transistors by means of adjusting VR1, VR2, VR101 and VR102. The idle current at this time is 50 mV DC.

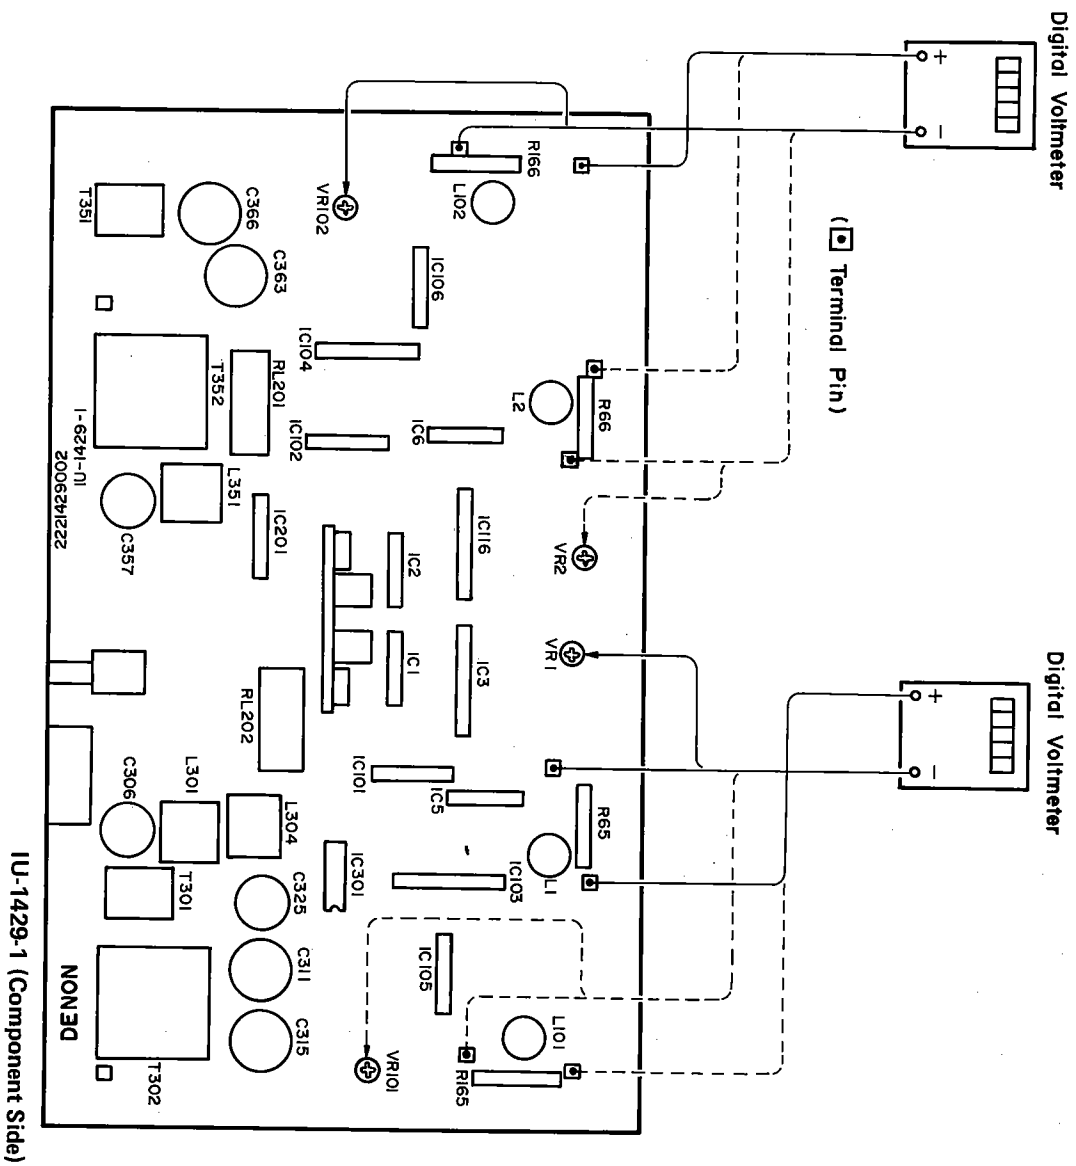

1U-1453 POWER AMP. UNIT (for DCA-3500)

Pattern Side 1

2

ω

4

5

La

—

○


A

B

D

四

7

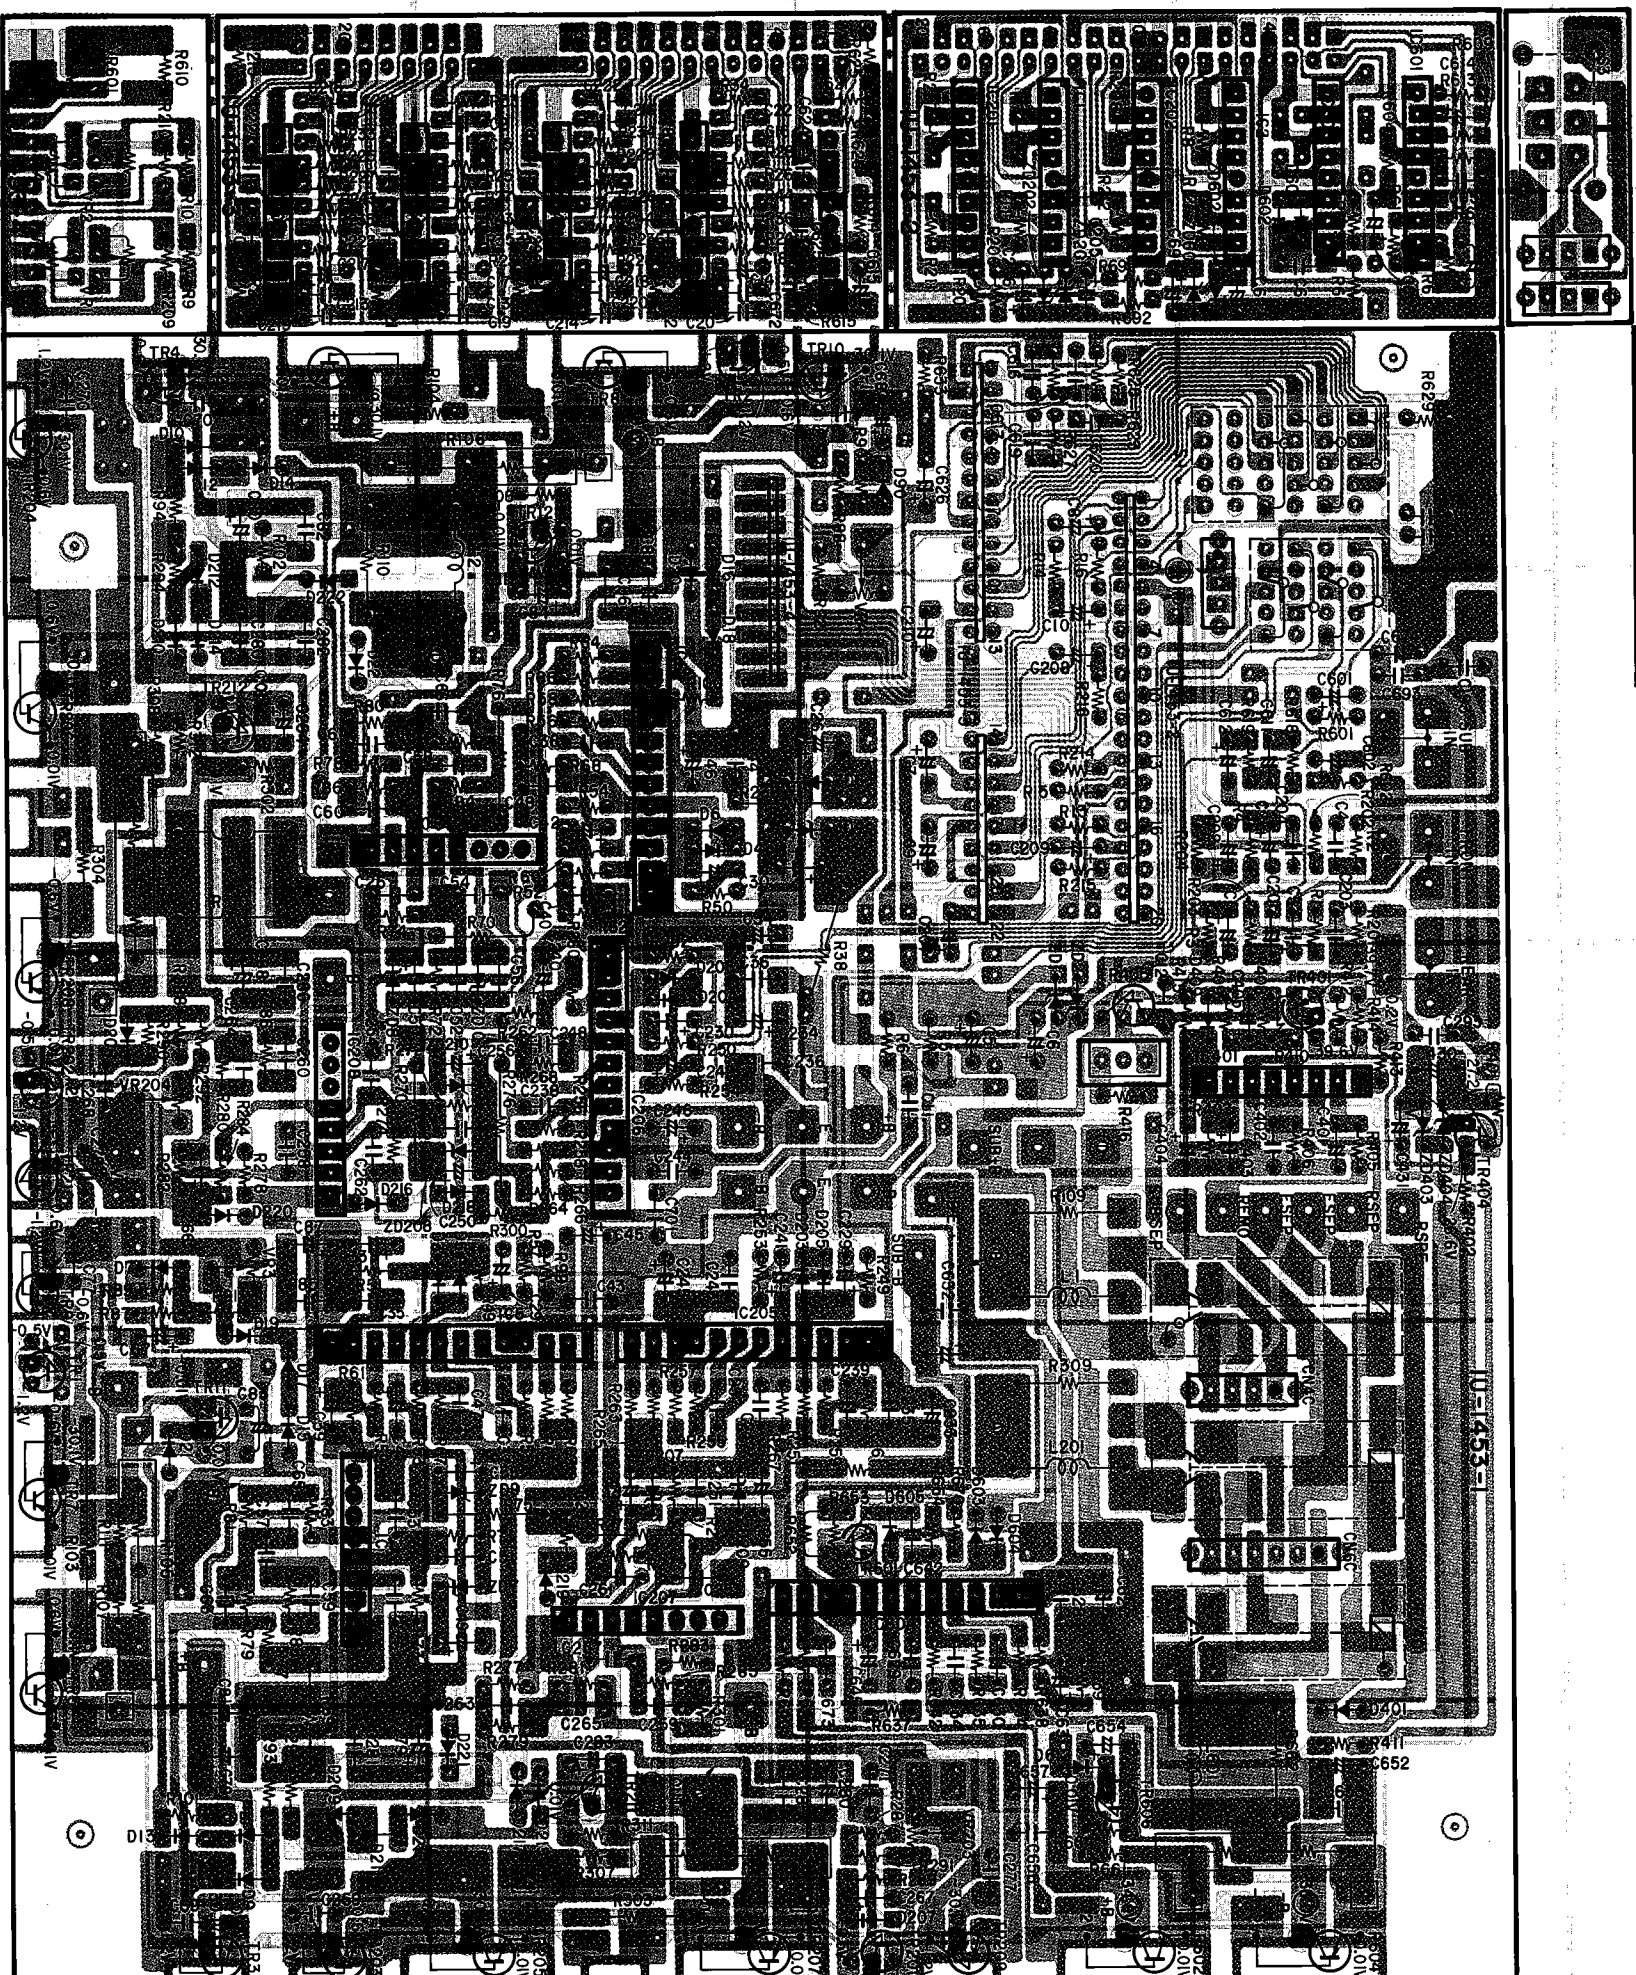

Pin	1C5	1C6	1C205	1C206
1	30.1V	30.1V	30.1V	30.1V
2	—	—	—	—
3	24.1V	24.1V	24.1V	24.1V
4	0.1V	0.1V	0.1V	0.1V
5	0.1V	0.1V	0.1V	0.1V
6	-28.3V	-28.3V	-28.3V	-28.3V
7	-0.5V	-0.5V	-0.5V	-0.5V
8	-0.1V	-0.1V	-0.1V	-0.1V
9	-30.1V	-30.1V	-30.1V	-30.1V
10	30.1V	30.1V	30.1V	30.1V
11	-0.1V	-0.1V	-0.1V	-0.1V
12	0.1V	0.1V	0.1V	0.1V

1	0.03
2	0.02
3	—
4	4.31
5	—
6	0.9V
7	2.3V
8	3.4V
9	—
10	—
11	—
12	—

Pin	IC7	IC8	IC207	IC208
1	—	—	—	—
2	—	—	—	—
3	—	—	—	—
4	—5.9V	—5.9V	—5.9V	—5.9V
5	0.1V	0.1V	0.1V	0.1V
6	0.1V	0.1V	0.1V	0.1V
7	0.2V	0.2V	0.2V	0.2V
8	15.5V	15.5V	15.5V	15.5V

1	0.1V
2	0.1V
3	33.6V
4	0.1V
5	0.1V
6	0.4V
7	39.6V
8	0.2V
9	-39.8V
10	-39.8V
11	-0.1V
12	—

Pin	1	2	3	4	5	6	7	8
1C1	0V	—	—	—	—	—	0V	—
1C2	0V	—	—	—	—	—	0V	—
1C3	0V	—	—	—	—	—	0V	—
1C4	0V	—	—	—	—	—	0V	—
1C201	0V	—	—	—	—	—	0V	—
1C202	0V	—	—	—	—	—	0V	—
1C203	0V	—	—	—	—	—	0V	—
1C204	0V	—	—	—	—	—	0V	—
1C601	0V	—	—	—	—	—	0V	—
1C602	0V	—	—	—	—	—	0V	—
1C603	0V	—	—	—	—	—	0V	—

Component Side

A

B

C

D

E

2

3


4

5

6


7

8

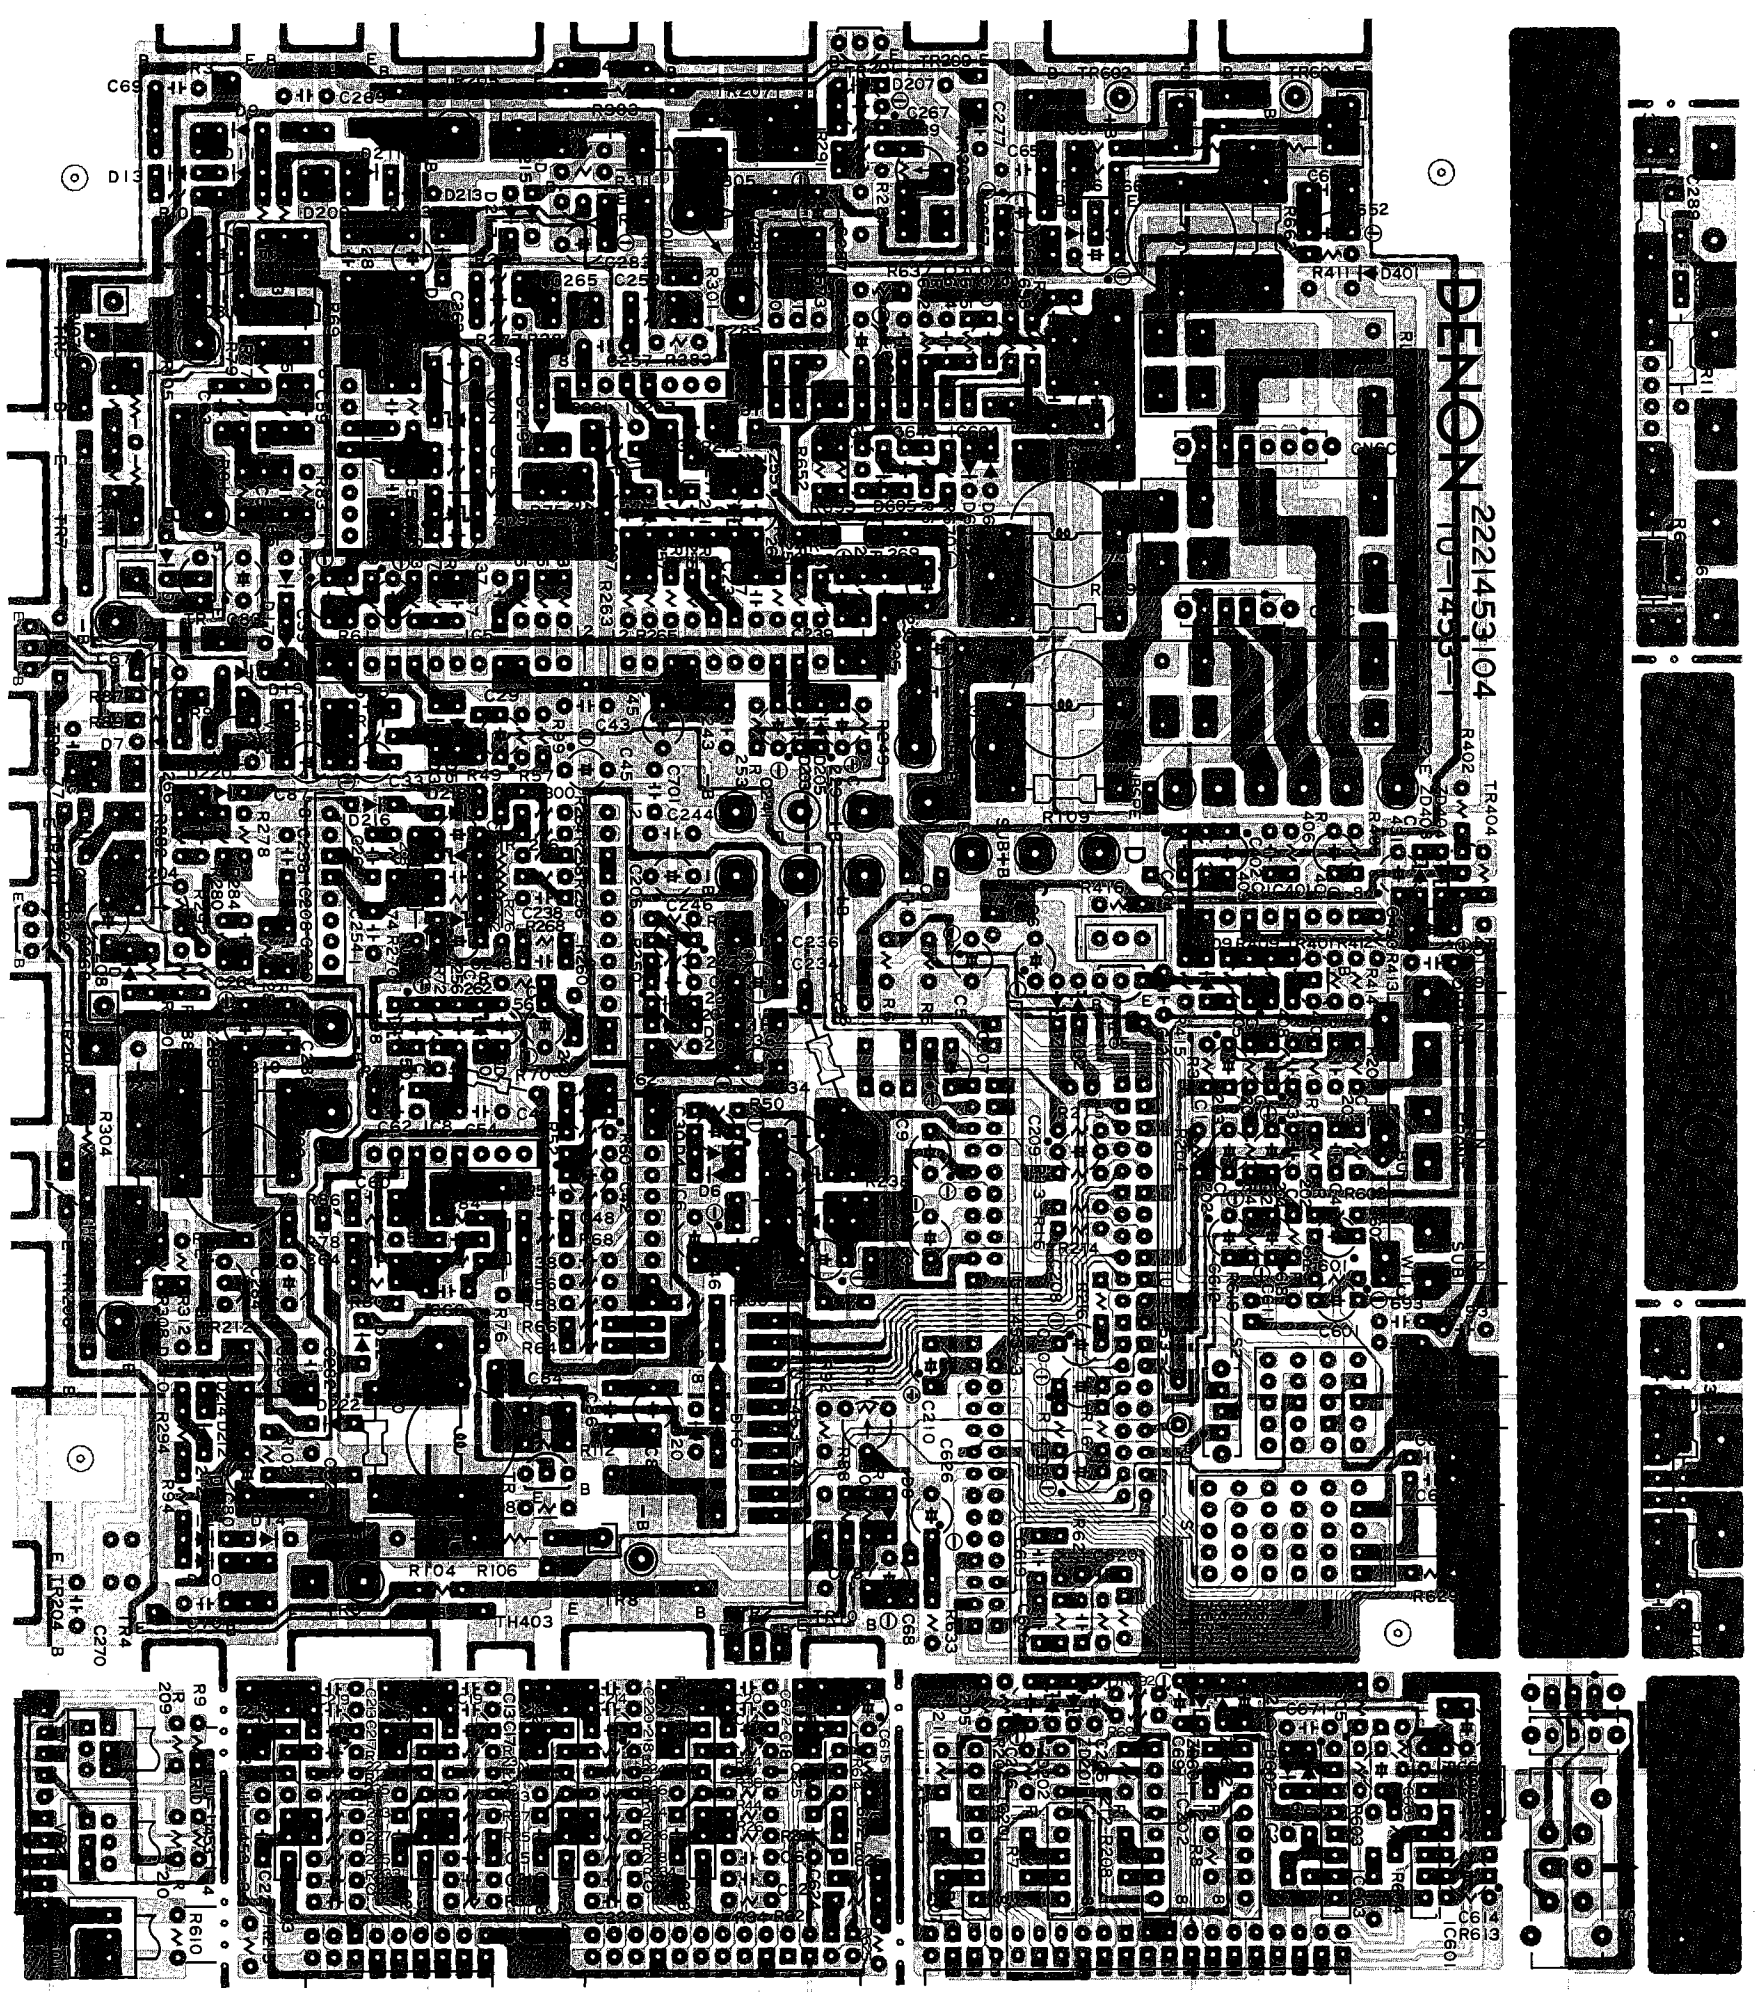

1U-1432 POWER SUPPLY (for DCA-3500)

Pattern Side 1 2 3 4 5 6 7 8

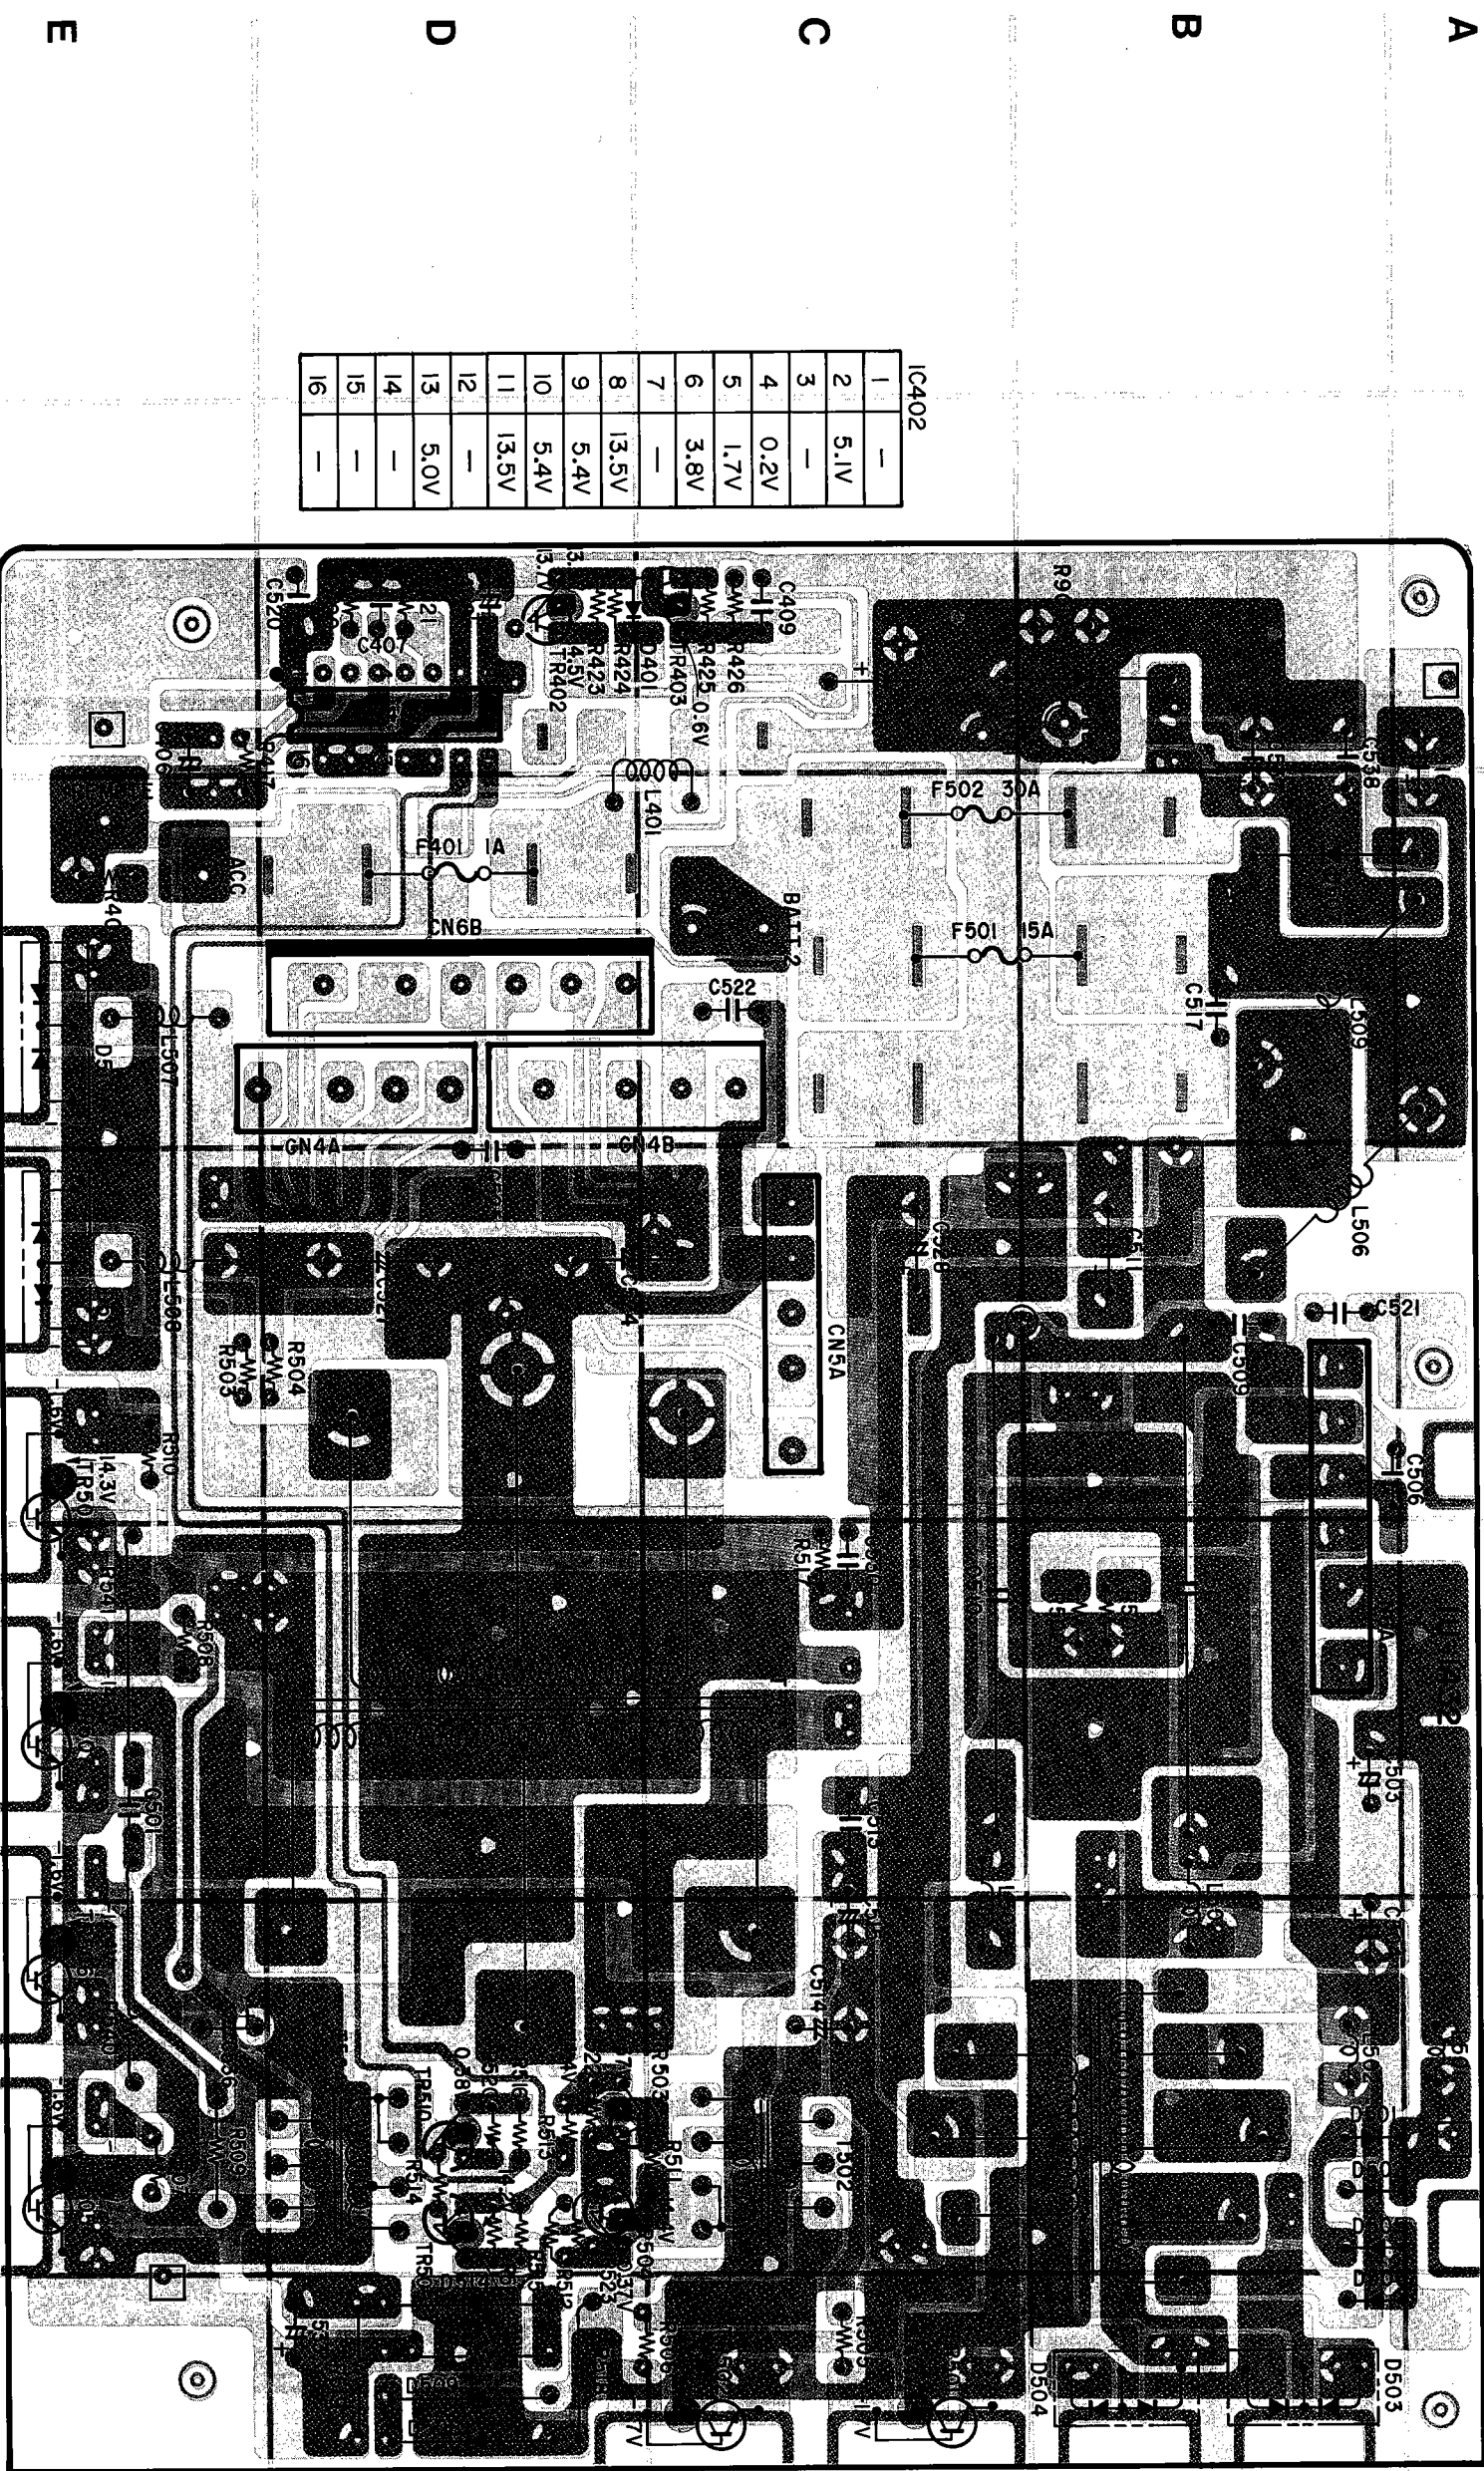

Component Side

2

ω


4

67

9

88

A

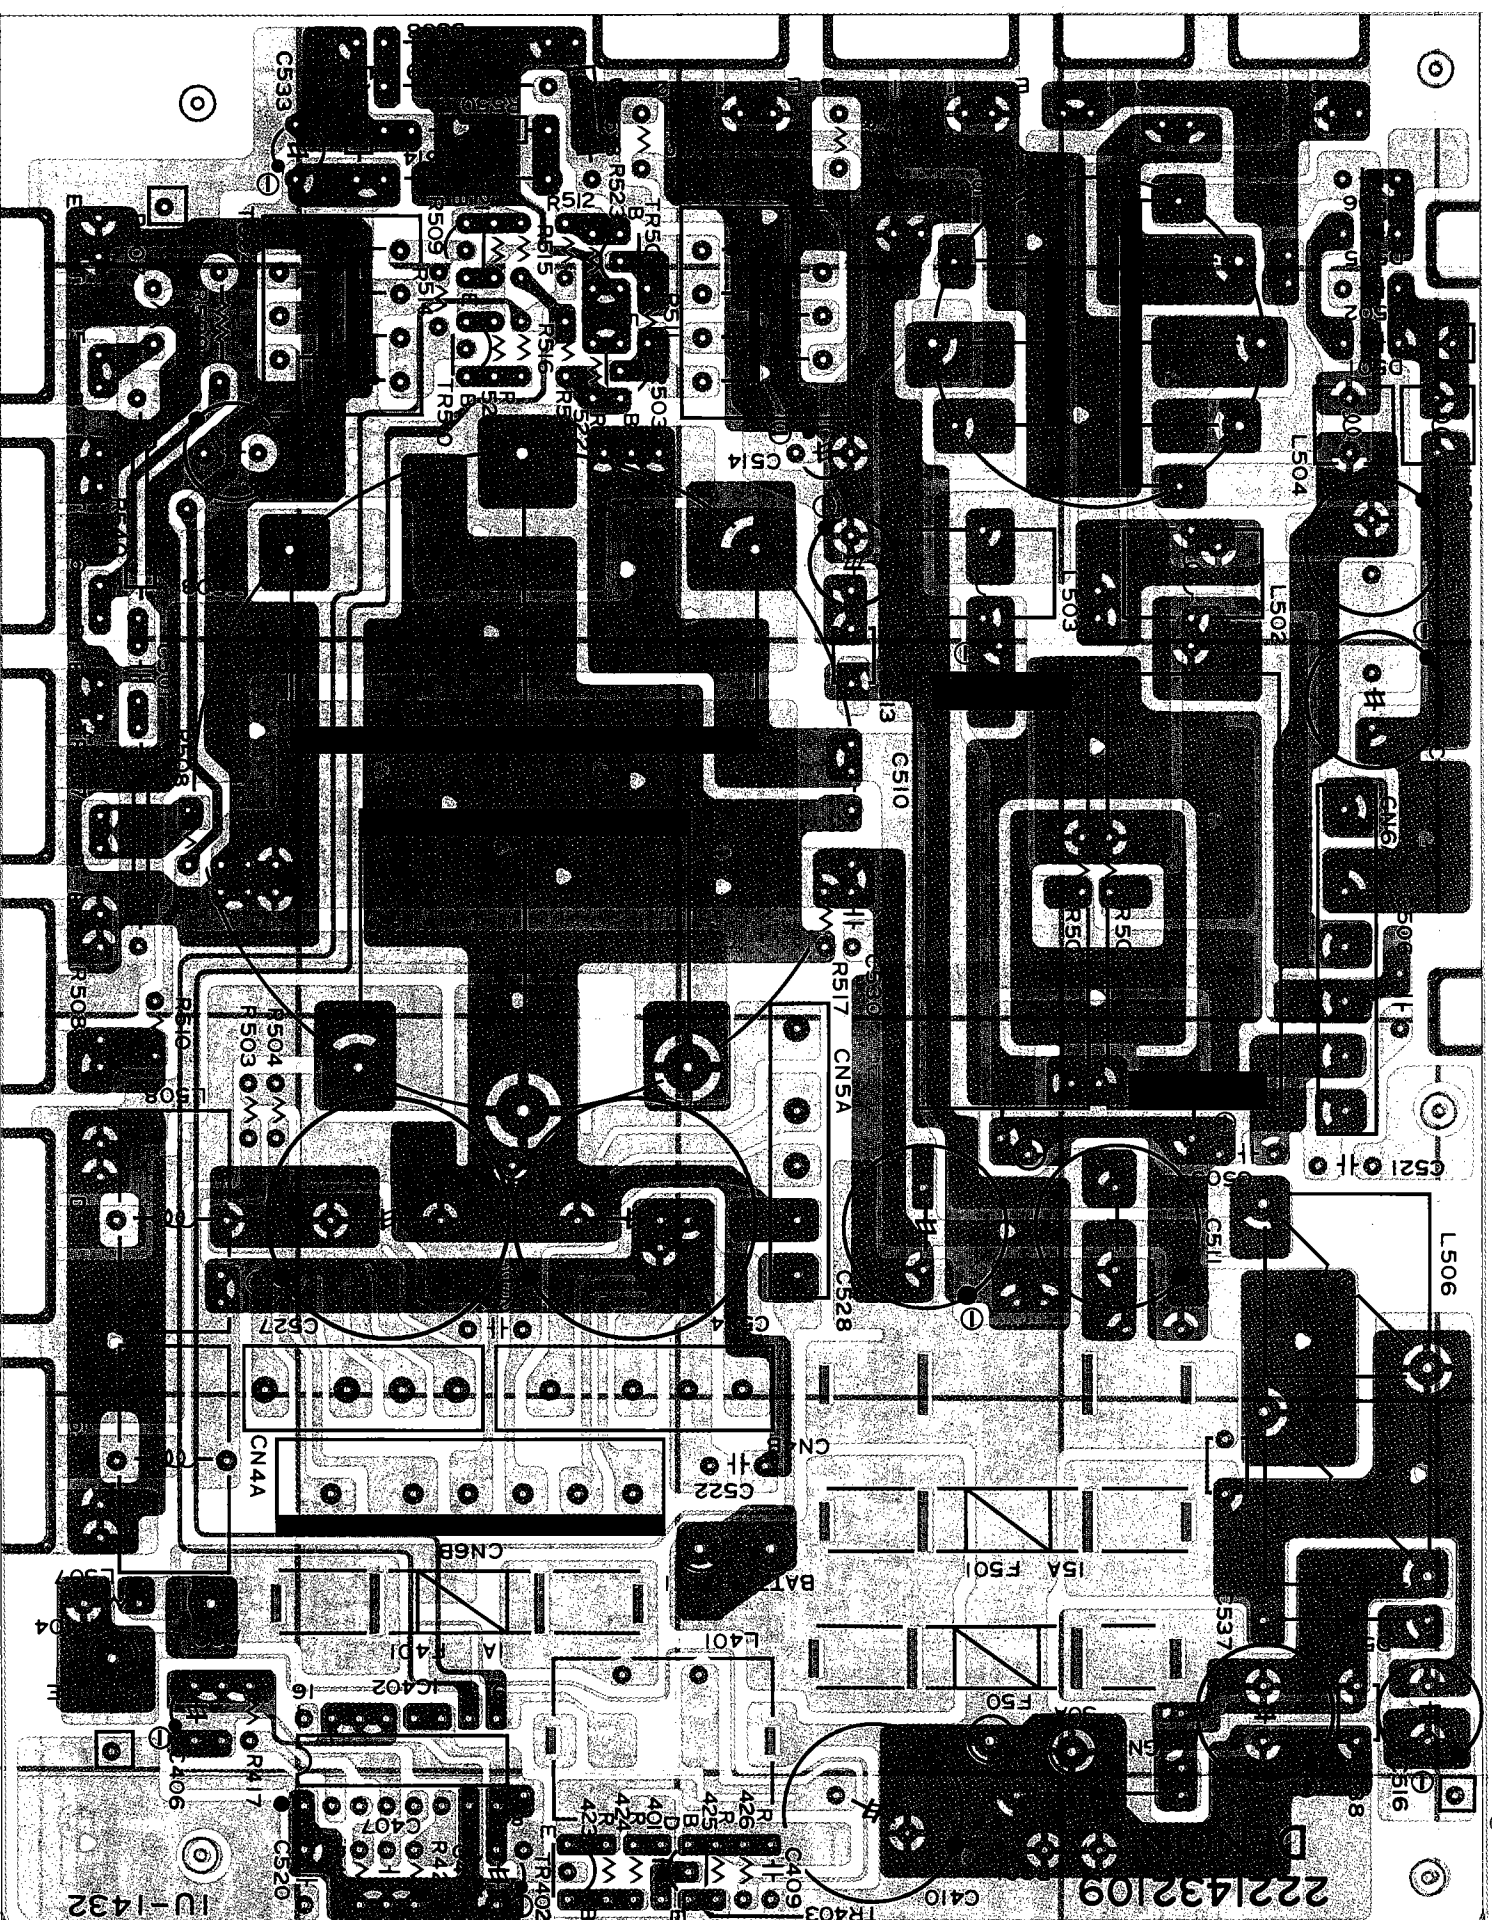

1U-1429 AMP. UNIT (for DCA-3400)

Pattern Side 1

2

3


4

5

6

7

8

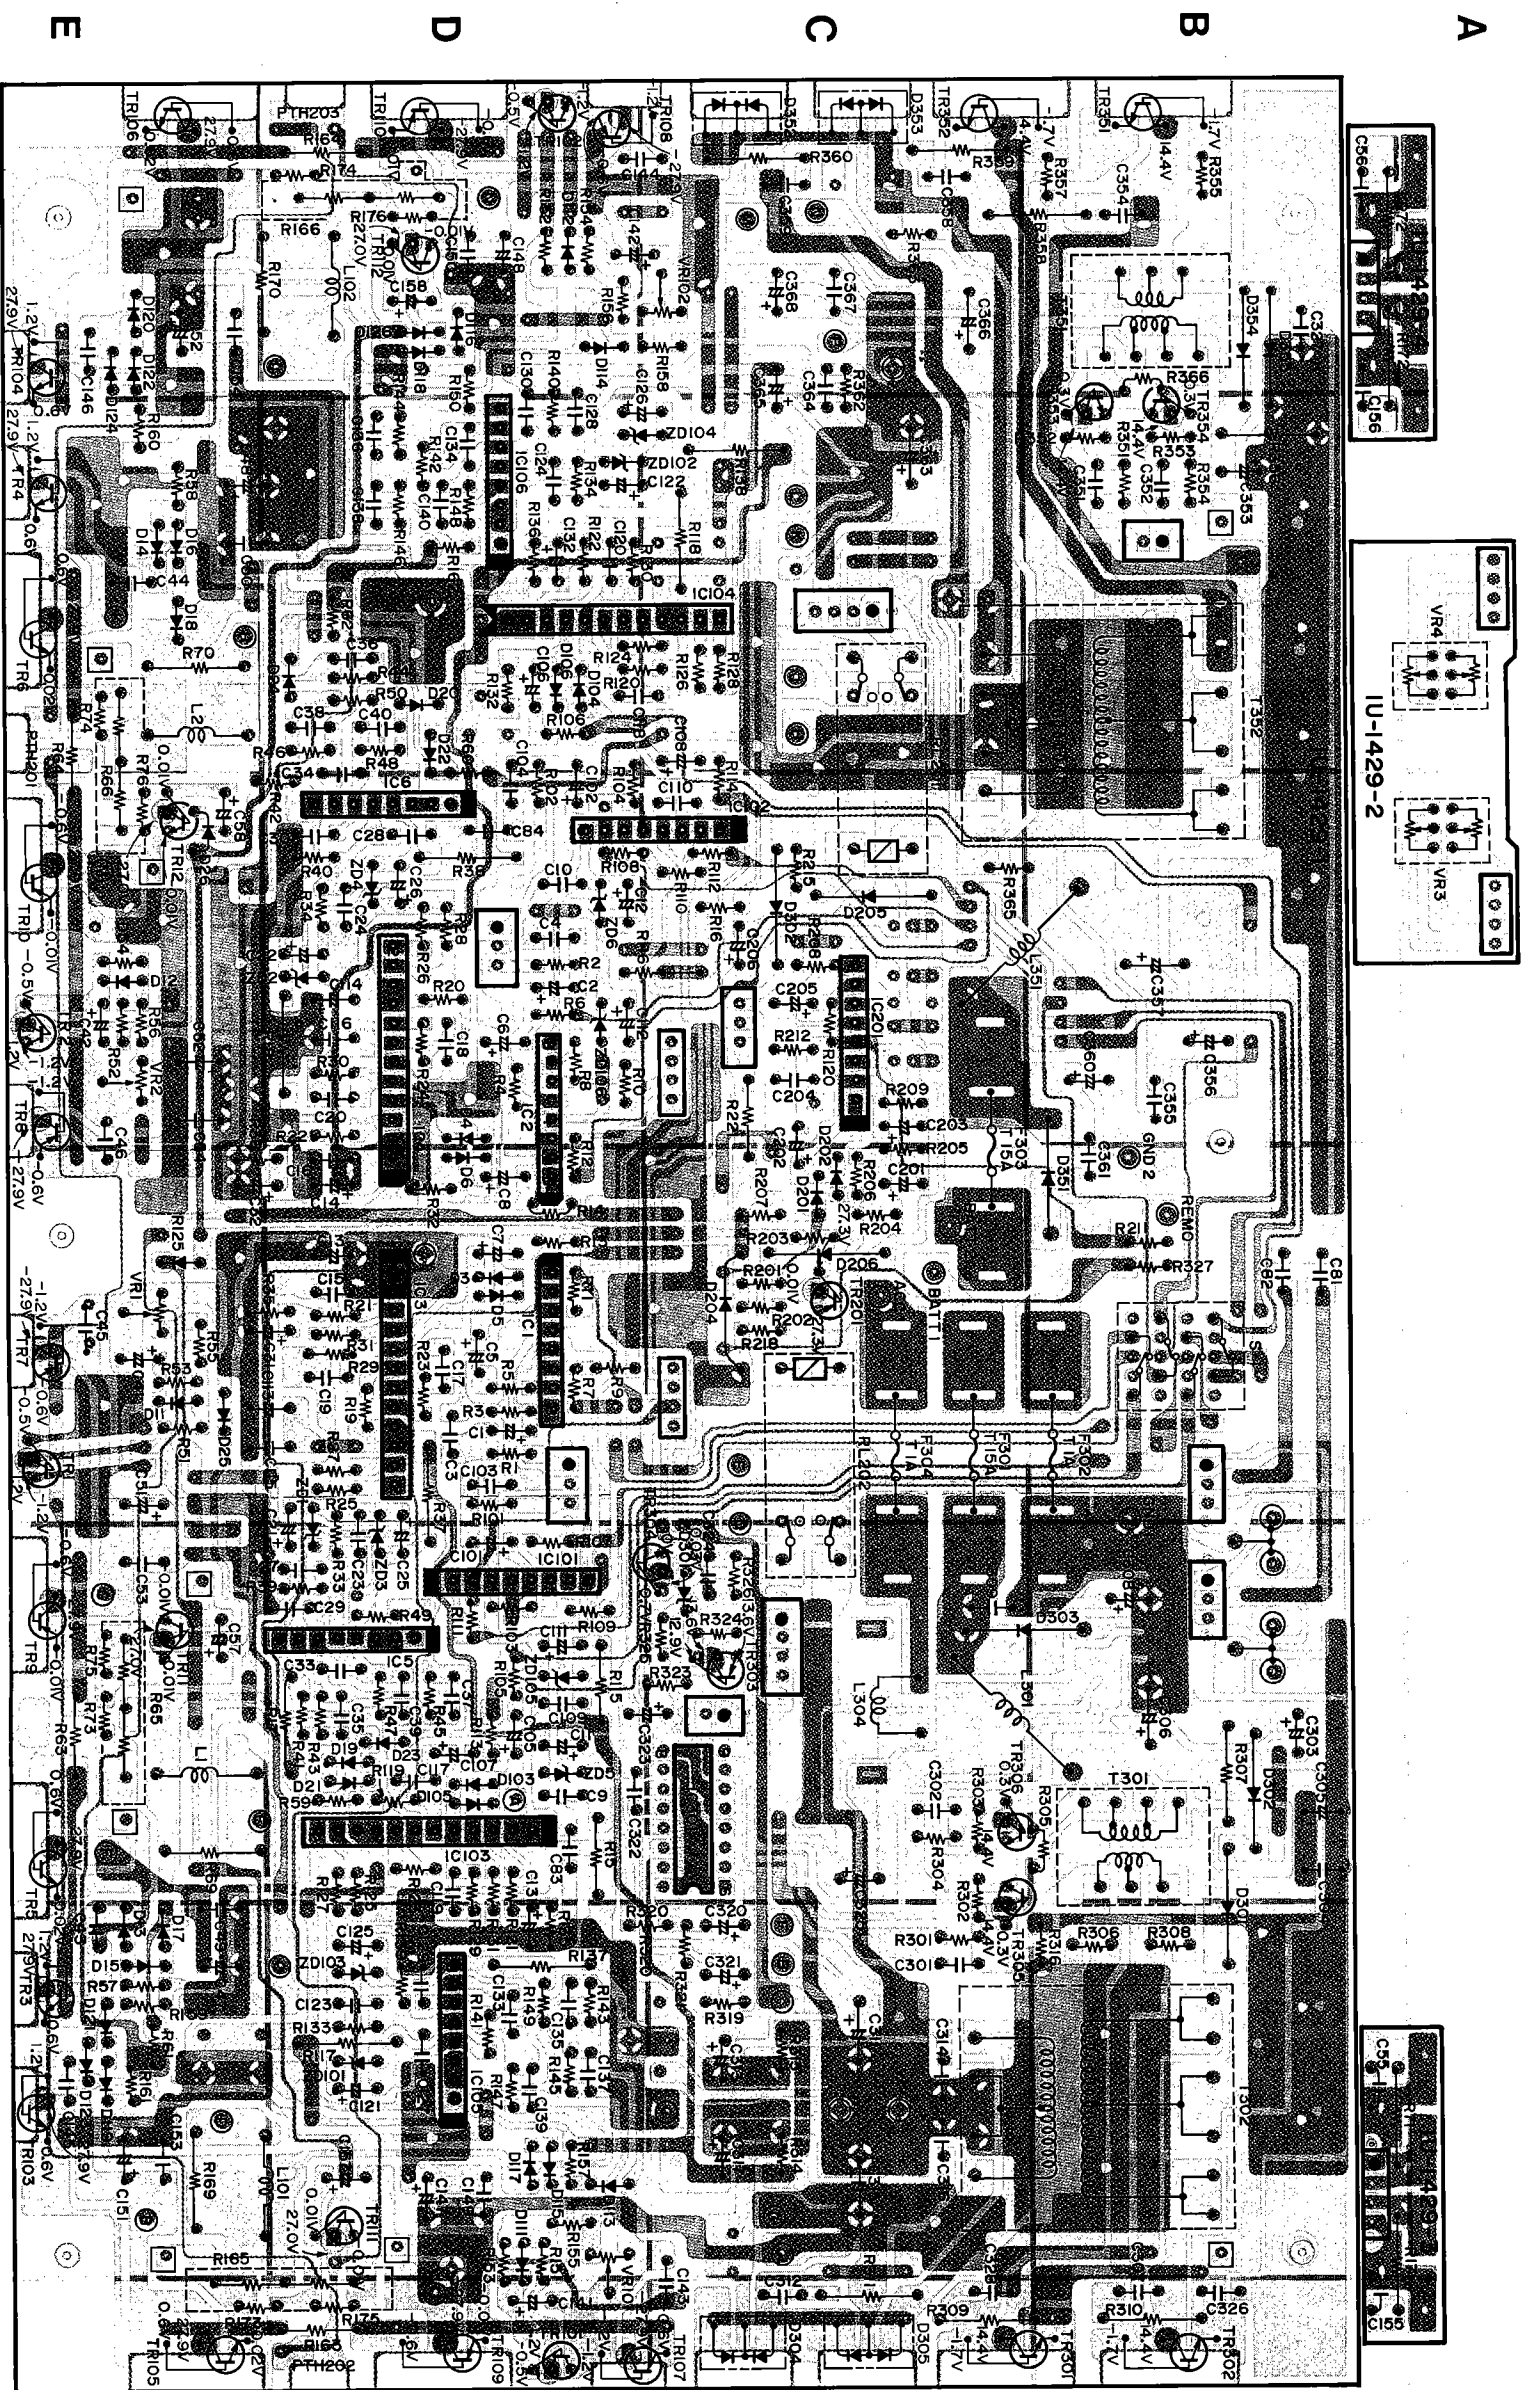

PIN	IC3	IC4	IC103	IC104
1	27.9V	27.9V	27.9V	27.9V
2	27.9V	27.9V	27.9V	27.9V
3	21.8V	21.8V	21.8V	21.8V
4	0.2V	0.2V	0.2V	0.2V
5	0.2V	0.2V	0.2V	0.2V
6	-26.2V	-26.2V	-26.2V	-26.2V
7	0.5V	0.5V	0.5V	0.5V
8	0.05V	0.05V	0.05V	0.05V
9	-27.9V	-27.9V	-27.9V	-27.9V
10	-27.9V	-27.9V	-27.9V	-27.9V
11	-0.04V	-0.04V	-0.04V	-0.04V
12	0.06V	0.06V	0.06V	0.06V

PIN	IC1	IC2	IC101	IC102
1	0.003V	0.003V	0.003V	0.003V
2	0.007V	0.007V	0.007V	0.007V
3	0.006V	0.006V	0.006V	0.006V
4	-14.7V	-14.7V	-14.7V	-14.7V
5	0.007V	0.007V	0.007V	0.007V
6	0.007V	0.007V	0.007V	0.007V
7	0.008V	0.008V	0.008V	0.008V
8	14.7V	14.7V	14.7V	14.7V

PIN	IC5	IC6	IC105	IC106
1	—	—	—	—
2	—	—	—	—
3	—	—	—	—
4	-15.4V	-15.4V	-15.4V	-15.4V
5	0.01V	0.01V	0.01V	0.01V
6	0.01V	0.01V	0.01V	0.01V
7	0.04V	0.04V	0.04V	0.04V
8	15.4V	15.4V	15.4V	15.4V

PIN	IC301
1	0V
2	5.0V
3	—
4	0.2V
5	1.7V
6	3.7V
7	—
8	13.6V
9	5.0V
10	5.0V
11	13.6V
12	—
13	—
14	5.0V
15	—
16	0V

PIN	IC201
1	0.01V
2	0.01V
3	—
4	4.3V
5	—
6	0.8V
7	2.2V
8	3.3V

1
Component Side

2

3


4

5

6

7

8

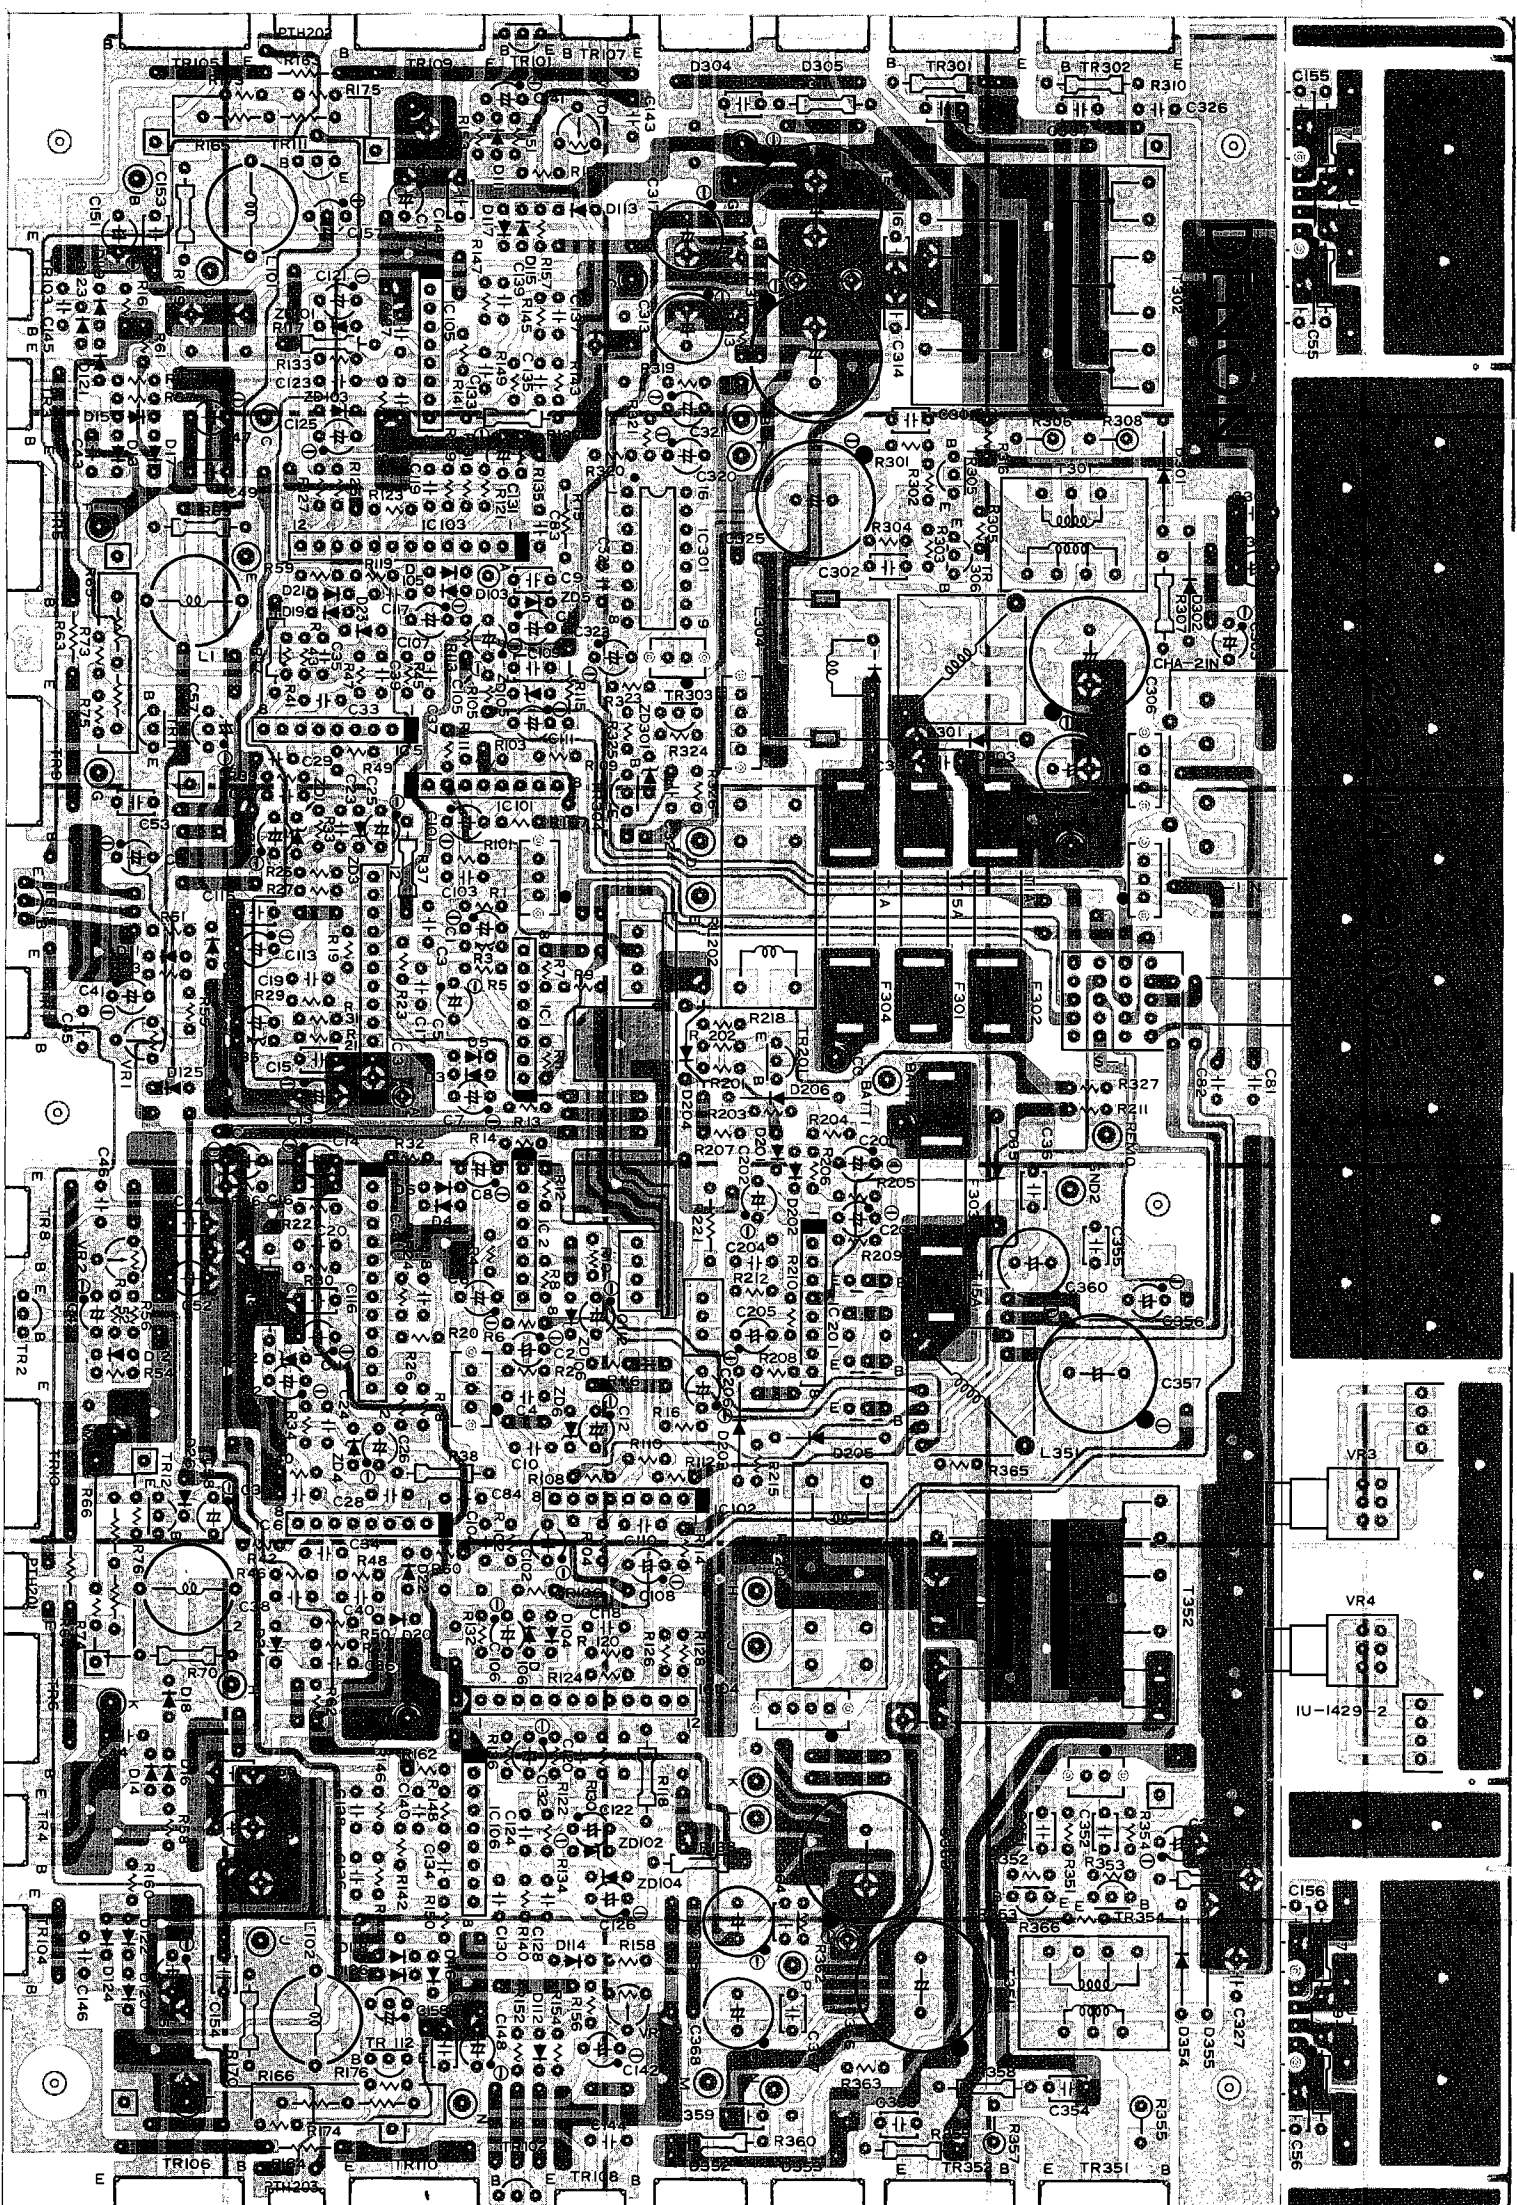

1U-1453 POWER AMP. UNIT PARTS LIST (for DCA-3500)

Ref. No.		Part No.	Part Name & Descriptions	
SEMICONDUCTORS				
IC001 ~004	2360189001	M5218L (Mitsubishi)	IC	
IC005,006	2630394003	μPC1270H (NEC)	IC	
IC007,008	2630189001	M5218L (Mitsubishi)	IC	
IC201 ~204	2630189001	M5218L (Mitsubishi)	IC	
IC205,206	2630394003	μPC1270H (NEC)	IC	
IC207,208	2630189001	M5218L (Mitsubishi)	IC	
IC401	2630209004	μPC1237H (NEC)	IC	
IC601 ~603	2630189001	M5218L (Mitsubishi)	IC	
IC604	2630394003	μPC1270H (NEC)	IC	
TR001, 002	2730198028	2SC1815(GR)	Transistor	
TR011, 012	2730198044	2SC1815(V/GR)	Transistor	
TR201, 202	2730198028	2SC1815(GR)	Transistor	
TR211, 212	2730198044	2SC1815(V/GR)	Transistor	
TR401	2710102034	2SA1015(GR/Y)	Transistor	
TR404	2740097009	2SD1207(TT/S)	Transistor	
TR405	2690025008	RN1202(10K-10K)	Digital Transistor	
TR601	2730198015	2SC1815(BL)	Transistor	
TR606	2730198044	2SC1815(V/GR)	Transistor	
D003~022	2760417009	1SS270	Diode	
D203~222	2760417009	1SS270	Diode	
D401	2760427015	DSA1A2 (Type 3)	Diode	
D409	2760417009	1SS270	Diode	
D411	2760417009	1SS270	Diode	
D601~605	2760417009	1SS270	Diode	
D612	2760476008	HZS15-1 TD	Zener	
ZD001,002	2760476008	HZP-13	Zener	
ZD004	2760494006	HZP-13	Zener	
ZD006	2760494006	HZP-13	Zener	
ZD007	2760477007	HZS16-1 TD	Zener	
~010				
ZD201, 202	2760476008	HZS15-1 TD	Zener	
ZD207	2760477007	HZS16-1 TD	Zener	
~210				
ZD403, 404	2760475009	HZS12C-1 TD	Zener	
ZD601,602	2760476008	HZS15-1 TD	Zener	
RESISTORS (not including Carbon Film ±5%, 1/6W, 1/4W Type)				
R038	2442043050	470 ohm ±5% 1W	Metal Oxide (S)	
R069,070	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)	
R075,076	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)	
R103,104	2410167007	180 ohm ±5% 1/2W	Carbon Film	
R105,106	2432026032	0.22/0.22 ohm ±10% 3W Wire Wound		
R109,110	2442043034	10 ohm ±5% 1W	Metal Oxide (S)	
R113,114	2442043034	10 ohm ±5% 1W	Metal Oxide (S)	
R238	2442043050	470 ohm ±5% 1W	Metal Oxide (S)	
R269,270	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)	
R275,276	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)	
R303,304	2410167007	180 ohm ±5% 1/2W	Carbon Film	
R305,306	2432026032	0.22/0.22 ohm ±10% 3W Wire Wound		
R309,310	2442043034	10 ohm ±5% 1W	Metal Oxide (S)	
R313,314	2442043034	10 ohm ±5% 1W	Metal Oxide (S)	
R401	2412379026	560 ohm ±5% 1/4W	Carbon Film	
R402	2412379000	470 ohm ±5% 1/4W	Carbon Film	
R416	2410193000	2.2 kohm ±5% 1/2W	Carbon Film	
R560	244006015	1.2 ohm ±5% 1W	Metal Oxide (NBF)	

Ref. No.	Part No.	Part Name & Descriptions	
R660	2432026032	0.22/0.22 ohm ±10% 3W Wire Wound	
R662,663	2442043034	10 ohm ±5% 1W Metal Oxide (S)	
VR001	2110491002	Variable Volume 20 kohm	
VR003	2116048048	Semi Fixed Resistor 2.2 kohm	
VR201	2110491002	Variable Volume 20 kohm	
VR203	2116048048	Semi Fixed Resistor 2.2 kohm	
VR601	2110490003	Variable Volume 20 kohm	

CAPACITORS				
C001,002	2544260061	3.3μF ±20% 50V	Electrolytic	
C003,004	2531055056	220pF ±10% 50V	Ceramic	
C005,006	2544254035	47μF ±20% 16V	Electrolytic	
C007~010	2544256004	10μF ±20% 25V	Electrolytic	
C011,012	2531024003	0.01μF ±80, -20% 50V	Ceramic	
C013,014	2551121067	0.022μF ±5% 50V	Plastic Film	
C015,016	2561034018	0.033μF ±5% 50V	Metalized	
C017,018	2544256004	10μF ±20% 25V	Electrolytic	
C019,020	2551121041	0.015μF ±5% 50V	Plastic Film	
C021,022	2551121067	0.022μF ±5% 50V	Plastic Film	
C024	2544254048	100μF ±20% 16V	Electrolytic	
C026	2544260074	4.7μF ±20% 50V	Electrolytic	
C029,030	2544260045	1μF ±20% 50V	Electrolytic	
C033,034	2561034034	0.047μF ±5% 50V	Metalized	
C035,036	2533614000	30pF ±5% 50V	Ceramic	
C037,038	2544260058	2.2μF ±20% 50V	Electrolytic	
C039,040	2544260074	4.7μF ±20% 50V	Electrolytic	
C041,042	2561034034	0.047μF ±5% 50V	Metalized	
C043,044	2561034034	1μF ±20% 50V	Electrolytic	
C045,046	2544260045	—		
C047,048	2544254051	220μF ±20% 16V	Electrolytic	
C049,050	2533619005	47pF ±5% 50V	Ceramic	
C051,052	2531055069	100pF ±10% 50V	Ceramic	
C053,054	2544254051	220μF ±20% 16V	Electrolytic	
C055,056	2533625002	82pF ±5% 50V	Ceramic	
C057,058	2533603008	10pF ±0.5pF 50V	Ceramic	
C059,060	2533623004	68pF ±5% 50V	Ceramic	
C061,062	2531001000	330pF ±10% 50V	Ceramic	
C063~066	2544254006	10μF ±20% 16V	Electrolytic	
C067,068	2544254006	47pF ±5% 50V	Ceramic	
C069,070	2533619005	47pF ±5% 50V	Ceramic	
C077,078	2533619005	47pF ±5% 50V	Ceramic	
C079,080	2544260045	1μF ±20% 50V	Electrolytic	
C081,082	2561034034	0.047μF ±5% 50V	Metalized	
C083,084	2544258002	4.7μF ±20% 35V	Electrolytic	
C085,086	2561034034	0.047μF ±5% 50V	Metalized	
C087,088	2544260045	1μF ±20% 50V	Electrolytic	
C089,090	2561034018	0.033μF ±5% 50V	Metalized	
C193	2531024003	0.01μF ±80, -20% 50V	Ceramic	
C201,202	2544260061	3.3μF ±20% 50V	Electrolytic	
C203,204	2531055056	220pF ±10% 50V	Ceramic	
C205,206	2544254035	47μF ±20% 16V	Electrolytic	
C207~210	2544256004	10μF ±20% 25V	Electrolytic	
C213,214	2551121067	0.022μF ±5% 50V	Plastic Film	
C215,216	2561034018	0.033μF ±5% 50V	Metalized	
C217,218	2544256004	10μF ±20% 25V	Electrolytic	
C219,220	2551121041	0.015μF ±5% 50V	Plastic Film	
C221,222	2551121067	0.022μF ±5% 50V	Plastic Film	
C229,230	2544260074	4.7μF ±20% 50V	Electrolytic	
C233,234	2544260045	1μF ±20% 50V	Electrolytic	
C235,236	2561034034	0.047μF ±5% 50V	Metalized	
C237,238	2533614000	30pF ±5% 50V	Ceramic	
C239,240	2544260058	2.2μF ±20% 50V	Electrolytic	

Ref. No.	Part No.	Part Name & Descriptions	
C241,242	2544260074	4.7μF ±20% 50V	Electrolytic
C243,244	2561034034	0.047μF ±5% 50V	Metalized
C245,246	2544260045	1μF ±20% 50V	Electrolytic
C247,248	—	—	—
C249,250	2544254051	220μF ±20% 16V	Electrolytic
C251,252	2533619005	47pF ±5% 50V	Ceramic
C253,254	2531055069	100pF ±10% 50V	Ceramic
C255,256	2544254051	220μF ±20% 16V	Electrolytic
C257,258	2533625002	82pF ±5% 50V	Ceramic
C259,260	2533603008	10pF ±0.5pF 50V	Ceramic
C261,262	2533623004	68pF ±5% 50V	Ceramic
C263~266	2531001000	330pF ±10% 50V	Ceramic
C267,268	2544254006	10μF ±20% 16V	Electrolytic
C269,270	2533619005	47pF ±5% 50V	Ceramic
C277,278	2533619005	47pF ±5% 50V	Ceramic
C279,280	2544260045	1μF ±20% 50V	Electrolytic
C281,282	2561034034	0.047μF ±5% 50V	Metalized
C283,284	2544258002	4.7μF ±20% 35V	Electrolytic
C285,286	2561034034	0.047μF ±5% 50V	Metalized
C287,288	2544260045	1μF ±20% 50V	Electrolytic
C289,290	2561034018	0.033μF ±5% 50V	Metalized
C401	2544254006	10μF ±20% 16V	Electrolytic
C402	2551121025	0.01μF ±5% 50V	Plastic Film
C403	2544252037	100μF ±20% 10V	Electrolytic
C404	2544250026	100μF ±20% 6.3V	Electrolytic
C405	2544260045	1μF ±20% 50V	Electrolytic
C430	2544260074	4.7μF ±20% 50V	Electrolytic
C431	2544258015	10μF ±20% 35V	Electrolytic
C601,602	2544258002	4.7μF ±20% 35V	Electrolytic
C603	2544256020	33μF ±20% 25V	Electrolytic
C604	—	—	—
C605	2531055056	220pF ±10% 50V	Ceramic
C606~608	—	—	—
C609	—	—	—
C611,612	2544258002	4.7μF ±20% 35V	Electrolytic
C613~615	2544260004	10μF ±20% 25V	Electrolytic
C616	2561035004	0.18μF ±5% 50V	Metalized
C617	2561035033	0.33μF ±5% 50V	Metalized
C618	2539035010	0.018μF ±10% 25V	Ceramic
C619	2561034089	0.12μF ±5% 50V	Metalized
C620	2561035017	0.22μF ±5% 50V	Metalized
C621	2539035007	0.012μF ±10% 25V	Ceramic
C622,623	—</		

1U-1432 POWER SUPPLY UNIT PARTS LIST (for DCA-3500)

Ref. No.	Part No.	Part Name & Descriptions			
SEMICONDUCTORS					
IC402	2620720001	IR3M02 (Sharp)	IC		
TR402	2720078006	2SB764(E/F)	Transistor		
TR403	2730198002	2SC1815(Y)	Transistor		
TR503, 504	2730327019	2SC2274K(E/F)AA	Transistor		
TR509, 510	2730327019	2SC2274K(E/F)AA	Transistor		
D501,502	2760442003	1SR124-200AT93	Diode		
D505,506	2760442003	1SR124-200AT93	Diode		
D507	2760398018	S3V10F(04P15)	Diode		
D508,509	2760055005	V03C	Diode		
D512	2760398018	S3V10F(04P15)	Diode		
D514	2760113002	U05C	Diode		
ZD401	2760464007	HZS7A-1 TD	Zener		
RESISTORS (not including Carbon Film $\pm 5\%$, 1/6W, 1/4W Type)					
R505~510	2412369010	1 ohm $\pm 5\%$ 1/4W	Carbon Film (NBF)		
R518,519	2442043034	10 ohm $\pm 5\%$ 1W	Metal Oxide (S)		
R550	2440006015	1.2 ohm $\pm 5\%$ 1W	Metal Oxide (NBF)		
CAPACITORS					
C406	2544254048	100 μ F $\pm 20\%$ 16V	Electrolytic		
C407	2551120000	0.001 μ F $\pm 5\%$ 50V	Plastic Film		
C408	2544254048	100 μ F $\pm 20\%$ 16V	Electrolytic		
C409	2551121025	0.01 μ F $\pm 5\%$ 50V	Plastic Film		
C410	2544255005	3300 μ F $\pm 20\%$ 16V	Electrolytic		
C501	2561034018	0.033 μ F $\pm 5\%$ 50V	Metalized		
C503,504	2544220027	470 μ F 50V	Electrolytic		
C506	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized		
C507	2542083004	2200 μ F $\pm 20\%$ 50V	Electrolytic		
C509	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized		
C510	2542083004	2200 μ F $\pm 20\%$ 50V	Electrolytic		
C511	2544255018	4700 μ F $\pm 20\%$ 16V	Electrolytic		
C513	2551121025	0.01 μ F $\pm 5\%$ 50V	Plastic Film		
C514	2544279007	100 μ F $\pm 20\%$ 10V	Electrolytic		
C515	2544274002	220 μ F $\pm 20\%$ 16V	Electrolytic		
C516	2544254080	1000 μ F $\pm 20\%$ 16V	Electrolytic		
C517	2561034018	0.033 μ F $\pm 5\%$ 50V	Metalized		
C520,521	2531024003	0.01 μ F $\pm 80,-20\%$ 50V	Ceramic		
C522	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized		
C524	2544259027	4700 μ F $\pm 20\%$ 35V	Electrolytic		
C525	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized		
C527	2544259027	4700 μ F $\pm 20\%$ 35V	Electrolytic		
C528	2544255018	4700 μ F $\pm 20\%$ 16V	Electrolytic		
C530	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized		
C533	2544279010	220 μ F 10V	Electrolytic		
C536	2544274031	470 μ F 16V	Electrolytic		
C537	2544254093	2200 μ F $\pm 20\%$ 16V	Electrolytic		
C538	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized		
COIL, TRANS					
L401	2350037006	Inductor			
L501	2350028002	Coil (270 μ H)			
L502,503	2350039004	Inductor			
L504	2350028002	Coil (270 μ H)			
L506	2320093106	Choke Coil			
L507,508	2350040006	Inductor			
L509	2320093106	Choke Coil			
T501	2330291008	Pulse Trans			
T502	2330273000	Driver Trans			
T503	2330293006	Pulse Trans			
T504	2330273000	Driver Trans			

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
E.U.P.			
F401	2061025035	Fuse 1A (LC)	1
F501	2061017030	Fuse 15A	1
F502	2061017056	Fuse (30.0A)	1
	EP-5870	Fuse Holder	6
OTHER PARTS			
	221432109	(P.W. Board)	1
	EP-5667H1	Terminal Pin	4
	2050122062	6P Connector Pin Ass'y	1
	2050122059	5P Connector Pin Ass'y	1
	2050122046	4P Connector Pin Ass'y	1
	2050217061	6P Connector Base (ULTR)	1
	2050217045	4P Connector Base (ULTR)	1
	2030305074	1P Sin Connector Ass'y	1
	2030289080	1P Contact Ass'y	1
	2030300024	1P Sin Connector Ass'y	1
	2030300037	1P Sin Connector Ass'y	1
	2030305045	1P Sin Connector Ass'y	1
	2030305058	1P Sin Connector Ass'y	1
	2030305061	1P Sin Connector Ass'y	1

1U-1429 AMP. UNIT PARTS LIST (for DCA-3400)


Ref. No.	Part No.	Part Name & Descriptions	
SEMICONDUCTORS			
IC001,002	2630189001	M5218L (Mitsubishi)	IC
IC003,004	2630394003	μPC1270H (NEC)	IC
IC005,006	2630189001	M5218L (Mitsubishi)	IC
IC101,102	2630189001	M5218L (Mitsubishi)	IC
IC103,104	2630394003	μPC1270H (NEC)	IC
IC105,106	2630189001	M5218L (Mitsubishi)	IC
IC201	2630209004	μPC1237H (NEC)	IC
IC301	2620832009	μPC494C (NEC)	IC
TR001,002	2730198028	2SC1815(GR)	Transistor
TR011,012	2730198044	2SC1815(Y/GR)	Transistor
TR101,102	2730198028	2SC1815(GR)	Transistor
TR111,112	2730198044	2SC1815(Y/GR)	Transistor
TR201	2710102034	2SA1015(GR/Y)	Transistor
TR202	—	—	
TR203,204	—	—	
TR303	2720067004	2SB647(D)	Transistor
TR304	2730198002	2SC1815(Y)	Transistor
TR305,306	2730327019	2SC2274K(E/F)	Transistor
TR353,354	2730327019	2SC2274K(E/F)	Transistor
D003~006	2760417009	1SS270	Diode
D011~026	2760417009	1SS270	Diode
D103~106	2760417009	1SS270	Diode
D111~126	2760417009	1SS270	Diode
D201,202	2760417009	1SS270	Diode
D203~206	2760433009	DSM1A2	Diode
D301	2760055005	V03C	Diode
D303	2760398018	S3V10F(04P15)	Diode
D306	—	—	
D351	2760398018	S3V10F(04P15)	Diode
D354	2760055005	V03C	Diode
ZD001~004	2760477007	HZS16-1	Zener
ZD005,006	2760476008	HZS15-1	Zener
ZD101~104	2760477007	HZS16-1	Zener
ZD105,106	2760476008	HZS15-1	Zener
ZD301	2760464007	HZS7A-1	Zener
RESISTORS (not including Carbon Film ±5%, 1/6W, 1/4W Type)			
R015,016	2410185005	1 kohm ±5% 1/2W	Carbon Film
R017,018	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)
R037,038	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)
R063,064	2410167007	180 ohm ±5% 1/2W	Carbon Film
R065,066	2432026032	0.22/0.22 ohm ±10% 3W	Wire Wound
R069~072	2442043034	10 ohm ±5% 1W	Metal Oxide (S)
R115,116	2410185005	1 kohm ±5% 1/2W	Carbon Film
R117,118	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)
R137,138	2442043047	2.2 kohm ±5% 1W	Metal Oxide (S)
R163,164	2410167007	180 ohm ±5% 1/2W	Carbon Film
R165,166	2432026032	0.22/0.22 ohm ±10% 3W	Wire Wound
R169~172	2442043034	10 ohm ±5% 1W	Metal Oxide (S)
R221	2410193000	2.2 kohm ±5% 1/2W	Carbon Film
R306	2412387005	1 ohm ±5% 1/4W	Carbon Film (NBS)
R307	2442043034	10 ohm ±5% 1W	Metal Oxide (S)
R308	2412387005	1 ohm ±5% 1/4W	Carbon Film (NBS)
R355	2412387005	1 ohm ±5% 1/4W	Carbon Film (NBS)
R356	2442043034	10 ohm ±5% 1W	Metal Oxide (S)


Ref. No.	Part No.	Part Name & Descriptions	
R357	2412387005	1 ohm $\pm 5\%$ 1/4W	Carbon Film (NBS)
R367 368	2440010027	2.7 ohm $\pm 5\%$ 1W	Metal Oxide (NBF)
VR001,002	2116048048	Semi Fixed Resistor 2.2 kohm	
VR003,004	2110491002	Variable Volume 20 kohm	
VR101,102	2116048048	Semi Fixed Resistor 2.2 kohm	
CAPACITORS			
C001,002	2544260061	3.3 μ F $\pm 20\%$ 50V	Electrolytic
C003,004	2531055056	220pF $\pm 10\%$ 50V	Ceramic
C005~008	2544260061	3.3 μ F $\pm 20\%$ 50V	Electrolytic
C009,010	2531024003	0.01 μ F +80,—20% 50V	Ceramic
C011,012	2544254048	100 μ F $\pm 20\%$ 16V	Electrolytic
C013,014	2544260045	1 μ F $\pm 20\%$ 50V	Electrolytic
C015,016	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized
C017,018	2533614000	30pF $\pm 5\%$ 50V	Ceramic
C019,020	2534342041	5pF $\pm 0.25\mu$ F 50V	Ceramic
C021,022	2544254051	220 μ F $\pm 20\%$ 16V	Electrolytic
C023,024	2533619005	47pF $\pm 5\%$ 50V	Ceramic
C025,026	2544254051	220 μ F $\pm 20\%$ 16V	Electrolytic
C027,028	2531055069	100pF $\pm 10\%$ 50V	Ceramic
C029,030	2533623004	68pF $\pm 5\%$ 50V	Cermic
C031,032	2544260058	2.2 μ F $\pm 20\%$ 50V	Electrolytic
C033,034	2533625002	82pF $\pm 5\%$ 50V	Ceramic
C035~038	2531001000	330pF $\pm 10\%$ 50V	Ceramic
C039,040	2533603008	10pF $\pm 0.5\mu$ F 50V	Ceramic
C041,042	2544254006	10 μ F $\pm 20\%$ 16V	Electrolytic
C043~046	2533619005	47pF $\pm 5\%$ 50V	Ceramic
C047,048	2544260045	1 μ F $\pm 20\%$ 50V	Electrolytic
C049,050	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized
C051,052	2544260045	1 μ F $\pm 20\%$ 50V	Electrolytic
C053,054	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized
C055,056	2561034018	0.033 μ F $\pm 5\%$ 50V	Metalized
C057,058	2544258002	4.7 μ F $\pm 20\%$ 35V	Electrolytic
C081~084	2531024003	0.01 μ F +80,—20% 50V	Ceramic
C101,102	2544260061	3.3 μ F $\pm 20\%$ 50V	Electrolytic
C103,104	2531055056	220pF $\pm 10\%$ 50V	Ceramic
C105~108	2544260061	3.3 μ F $\pm 20\%$ 50V	Electrolytic
C109,110	2531024003	0.01 μ F +80,—20% 50V	Ceramic
C111,112	2544254048	100 μ F $\pm 20\%$ 16V	Electrolytic
C113,114	2544260045	1 μ F $\pm 20\%$ 50V	Electrolytic
C115,116	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized
C117,118	2533614000	30pF $\pm 5\%$ 50V	Ceramic
C119,120	2534342041	5pF $\pm 0.25\mu$ F 50V	Ceramic
C121,122	2544254051	220 μ F $\pm 20\%$ 16V	Electrolytic
C123,124	2533619005	47pF $\pm 5\%$ 50V	Ceramic
C125,126	2544254051	220 μ F $\pm 20\%$ 16V	Electrolytic
C127,128	2531055069	100pF $\pm 10\%$ 50V	Ceramic
C129,130	2533623004	68pF $\pm 5\%$ 50V	Ceramic
C131,132	2544260058	2.2 μ F $\pm 20\%$ 50V	Electrolytic
C133,134	2533625002	82pF $\pm 5\%$ 50V	Ceramic
C135~138	2531001000	330pF $\pm 10\%$ 50V	Ceramic
C139,140	2533603008	10pF $\pm 0.5\mu$ F 50V	Ceramic
C141,142	2544254006	10 μ F $\pm 20\%$ 16V	Electrolytic
C143~146	2533619005	47pF $\pm 5\%$ 50V	Ceramic
C147,148	2544260045	1 μ F $\pm 20\%$ 50V	Electrolytic
C149,150	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized
C151,152	2544260045	1 μ F $\pm 20\%$ 50V	Electrolytic
C153,154	2561034034	0.047 μ F $\pm 5\%$ 50V	Metalized
C155,156	2561034018	0.033 μ F $\pm 5\%$ 50V	Metalized
C157,158	2544258002	4.7 μ F $\pm 20\%$ 35V	Electrolytic
C201	2544260045	1 μ F $\pm 20\%$ 50V	Electrolytic
C202	2544252037	100 μ F $\pm 20\%$ 10V	Electrolytic
C203	2544252037	100 μ F $\pm 20\%$ 10V	Electrolytic
C204	2531024003	0.01 μ F +80,—20% 50V	Ceramic
C205	2544254006	10 μ F $\pm 20\%$ 16V	Electrolytic

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
C206	2544258057	100μF ±20% 35V Electrolytic	
C301,302	2561034034	0.047μF ±5% 50V Metalized	
C303	2544252037	100μF ±20% 10V Electrolytic	
C304	2531024003	0.01μF +80-20% 50V Ceramic	
C305	2544260045	1μF ±20% 50V Electrolytic	
C306	2544255018	4700μF ±20% 16V Electrolytic	
C307	—	—	
C308	2544254080	1000μF ±20% 16V Electrolytic	
C309	2561034018	0.033μF ±5% 50V Metalized	
C310	—	—	
C311	2544259014	3300μF ±20% 35V Electrolytic	
C312	—	—	
C313	2544258060	220μF ±20% 35V Electrolytic	
C314	2561034034	0.047μF ±5% 50V Metalized	
C315	2544259014	3300μF ±20% 35V Electrolytic	
C316	2561034034	0.047μF ±5% 50V Metalized	
C317	2544258060	220μF ±20% 35V Electrolytic	
C318	—	—	
C320	2544254048	100μF ±20% 16V Electroitic	
C321	2544254051	220μF ±20% 16V Electrolytic	
C322	2551120000	0.001μF ±5% 50V Plastic Film	
C323	2544254048	100μF ±20% 16V Electrolytic	
C324	2531024003	0.01μF +80-20% 50V Ceramic	
C325	2544255005	3300μF ±20% 16V Electrolytic	
C326,327	2561034034	0.047μF ±5% 50V Metalized	
C328	—	—	
C351,352	2561034034	0.047μF ±5% 50V Metalized	
C353	2544252037	100μF ±20% 10V Electrolytic	
C354	—	—	
C355	2531024003	0.01μF +80-20% 50V Ceramic	
C356	2544260045	1μF ±20% 50V Electrolytic	
C357	2544255018	4700μF ±20% 16V Electrolytic	
C358	—	—	
C359	—	—	
C360	2544254080	1000μF ±20% 16V Electrolytic	
C361	2561034018	0.033μF ±5% 50V Metalized	
C362	—	50V Plastic Film	
C363	2544259014	3300μF ±20% 35V Electrolytic	
C364	2561034034	0.047μF ±5% 50V Metalized	
C365	2544258060	220μF ±20% 35V Electrolytic	
C366	2544259014	3300μF ±20% 35V Electrolytic	
C367	2561034034	0.047μF ±5% 50V Metalized	
C368	2544258060	220μF ±20% 35V Electrolytic	
COIL, TRANS			Q'ty
L001,002	2350007007	Inductor	2
L101,102	2350007000	Inductor	2
L301	2320093106	Choke Coil	1
L304	2350037006	Inductor	1
L305	2320093106	Choke Coil	1
T301	2330273000	Driver Trans	1
T302	2330272108	Pulse Trans	1
T351	2330273000	Driver Trans	1
T352	2330272108	Pulse Trans	1
RL201, 202	2149003005	Relay	2

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
E.U.P.			
SW001	2124641000	Rotary Switch	1
	2050391107	4P Speaker Terminal	2
	2048229003	4P. Pin Jack	1
	EP-5870	Fuse Holder	8
F301	2061017030	Fuse 15A	1
F302	2061025035	Fuse 1A (LC)	1
F303	2061017030	Fuse 1A (LC)	1
F304	2061025035	Fuse 1A (LC)	1
OTHER PARTS			
	2221429109	P.W. Board	1
	20900008146	Jumper Wire P=5mm	1
	EP-5667H1	Terminal Pin	4
	2050154043	4P NH Connector Base	4
	2050190036	3P NH Connector Base	2
	2050185038	3P Wire Holder	1
	2050185041	4P Wire Holder	4
	2030289077	1P Contact Ass'y ℓ=40 Black	2
	2030299009	1P SIN. Con. Ass'y ℓ=70 Blue	1
	2030299012	1P SIN. Con. Ass'y ℓ=180 Blue	1
	2030299025	1P SIN. Con. Ass'y ℓ=140 Red	2
	2030299038	1P SIN. Con. Ass'y ℓ=100 Black	4
	2030299041	1P SIN. Con. Ass'y ℓ=120 Yellow	1
	2030299054	1P SIN. Con. Ass'y ℓ=140 White	2
	2030299067	1P SIN. Con. Ass'y ℓ=170 Black	1
	2030300008	1P SIN. Con. Ass'y ℓ=180 White	1
	2030300011	1P SIN. Con. Ass'y ℓ=160 Brown	1
	2036193002	4P EH Con. Cord ℓ=170	2
	2030305003	1P SIN. Con. Ass'y ℓ=220 Red	1
	2030305016	1P SIN. Con. Ass'y ℓ=220 Black	1
	2030305029	1P SIN. Con. Ass'y ℓ=210 Orange	1
	2030305032	1P SIN. Con. Ass'y ℓ=170 Gray	1
	2090196003	2C Shield Wire ℓ=150 Gray	1
	2090196016	2C Shield Wire ℓ=200 Gray	1
	2050233045	4P EH Connector Base	2
	4150395001	U.L. Tube(4.7) Black ℓ=20	2
	4150309042	P.V.C. Tube ℓ=5	4
	4450033005	Wire Clamp Band	1
	4150396000	Glass Tube	4

WIRING DIAGRAM (for DCA-3500)

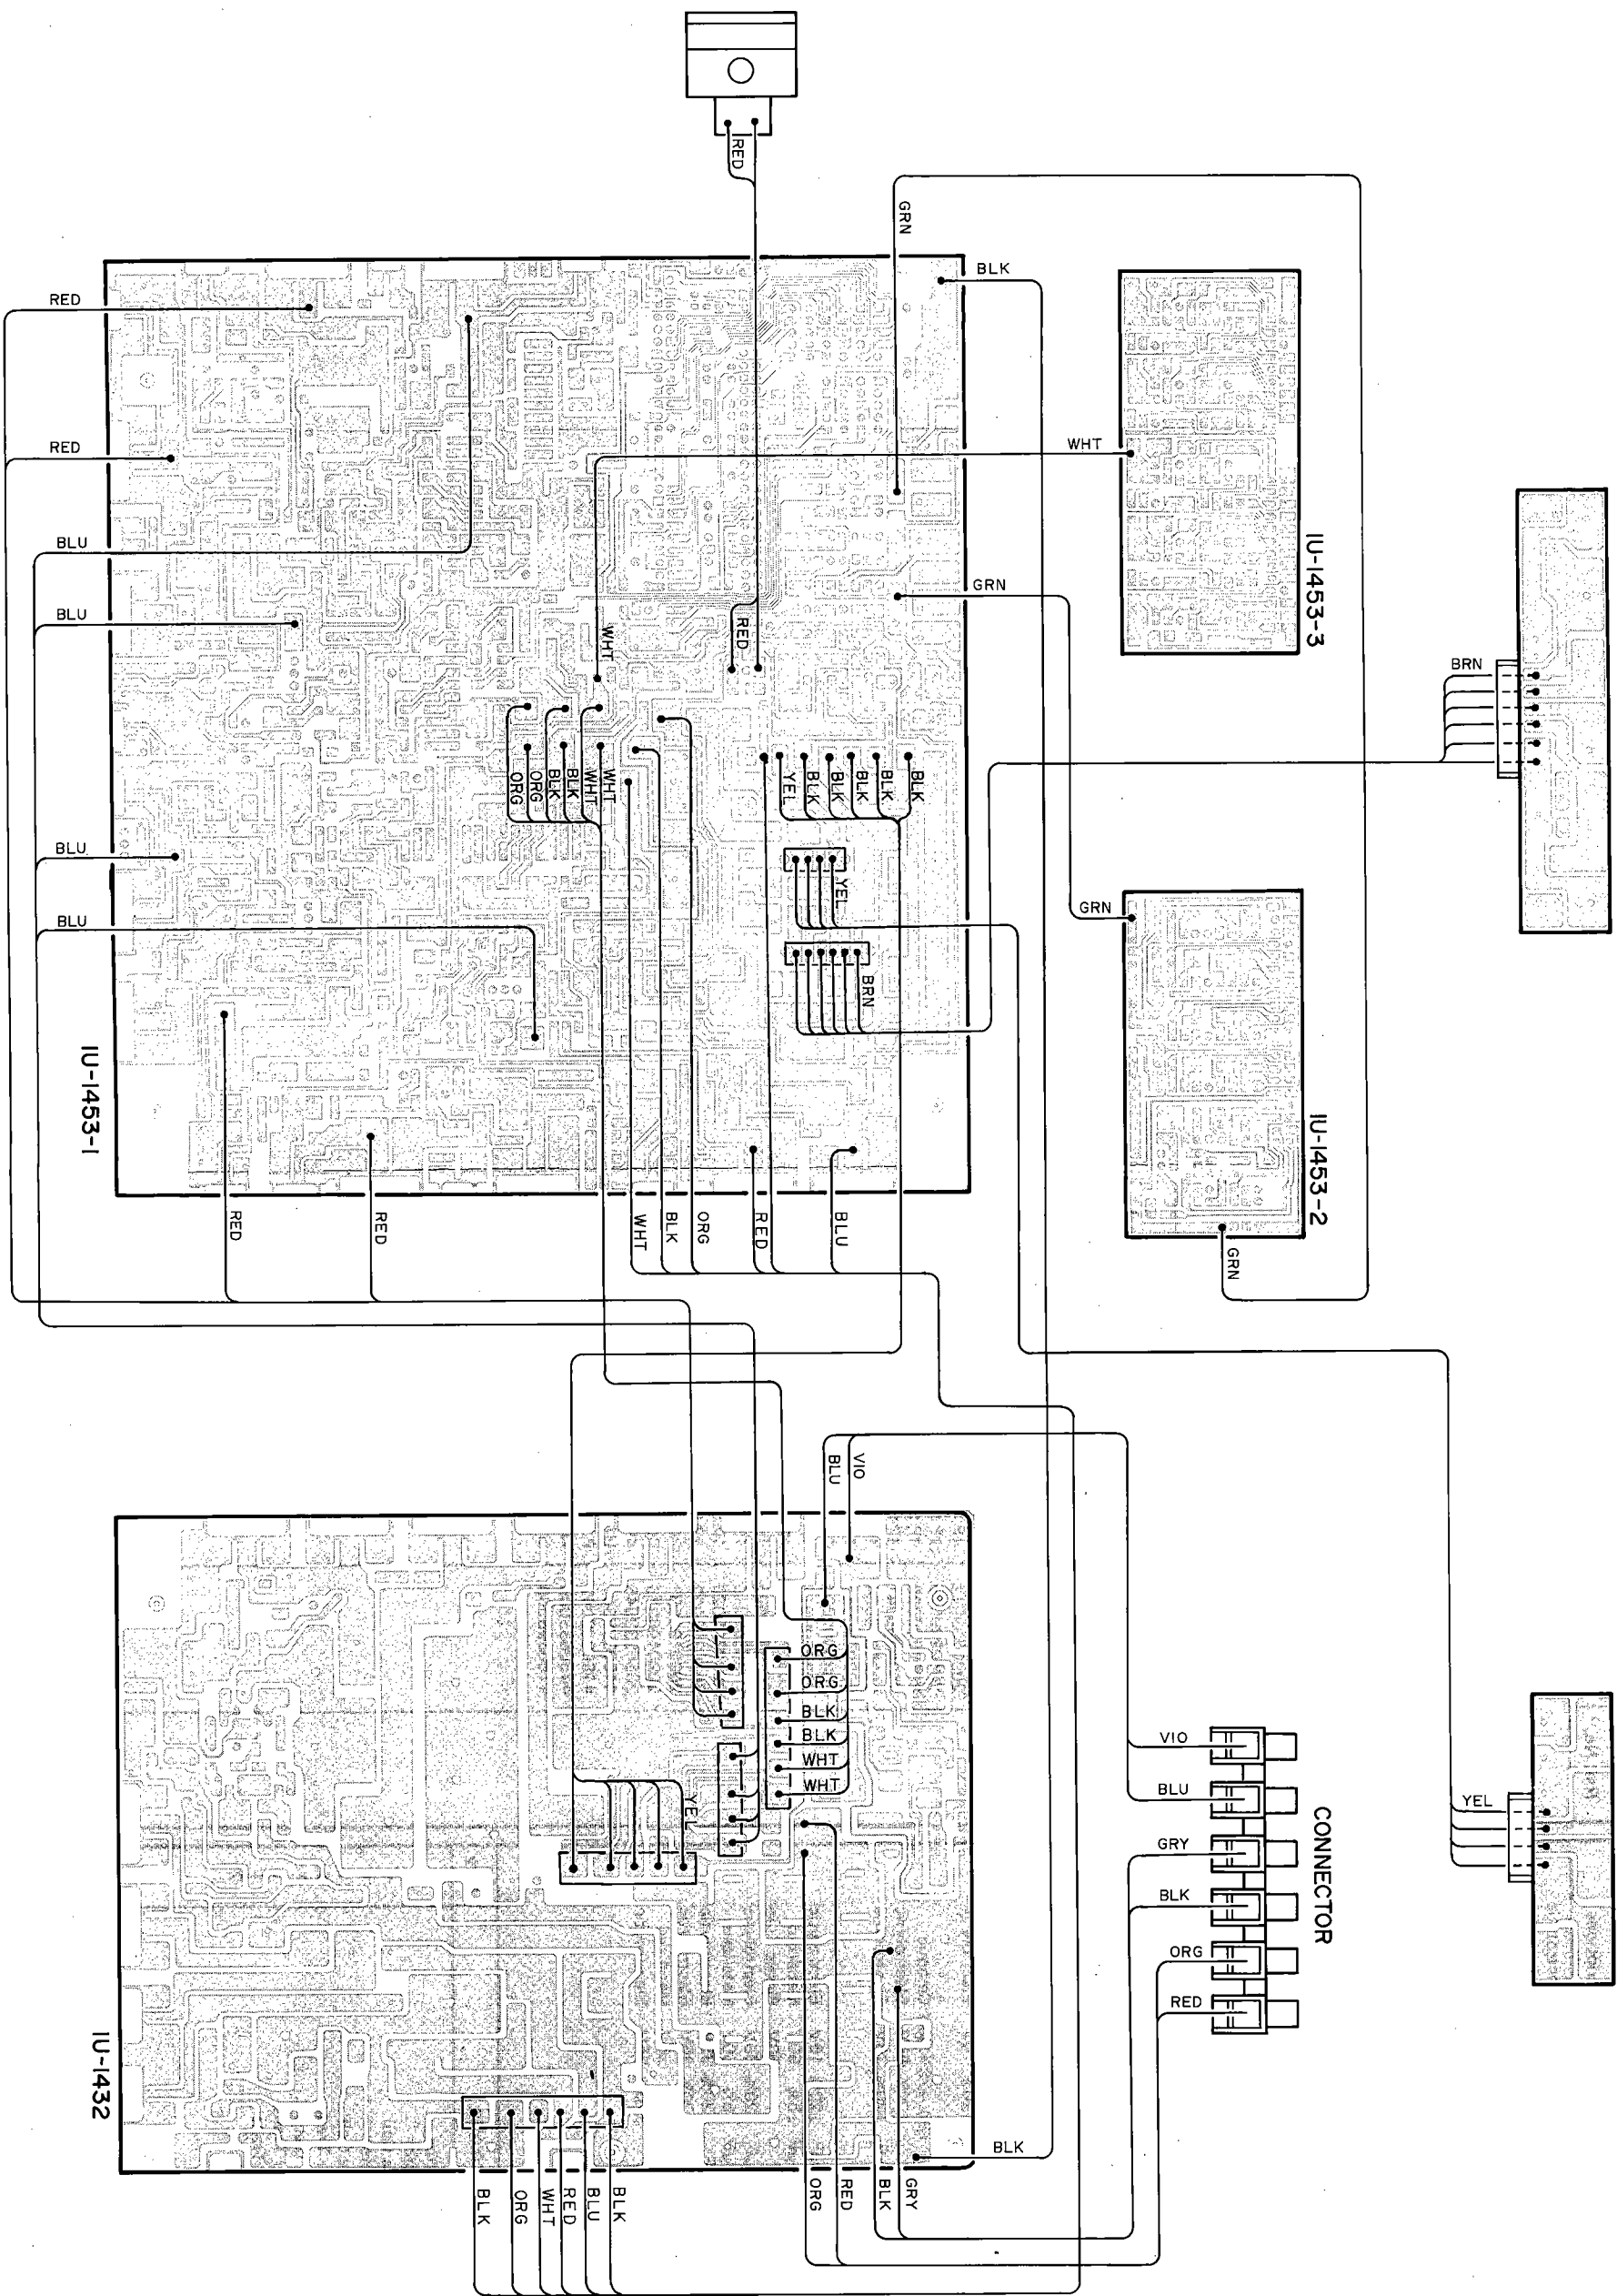

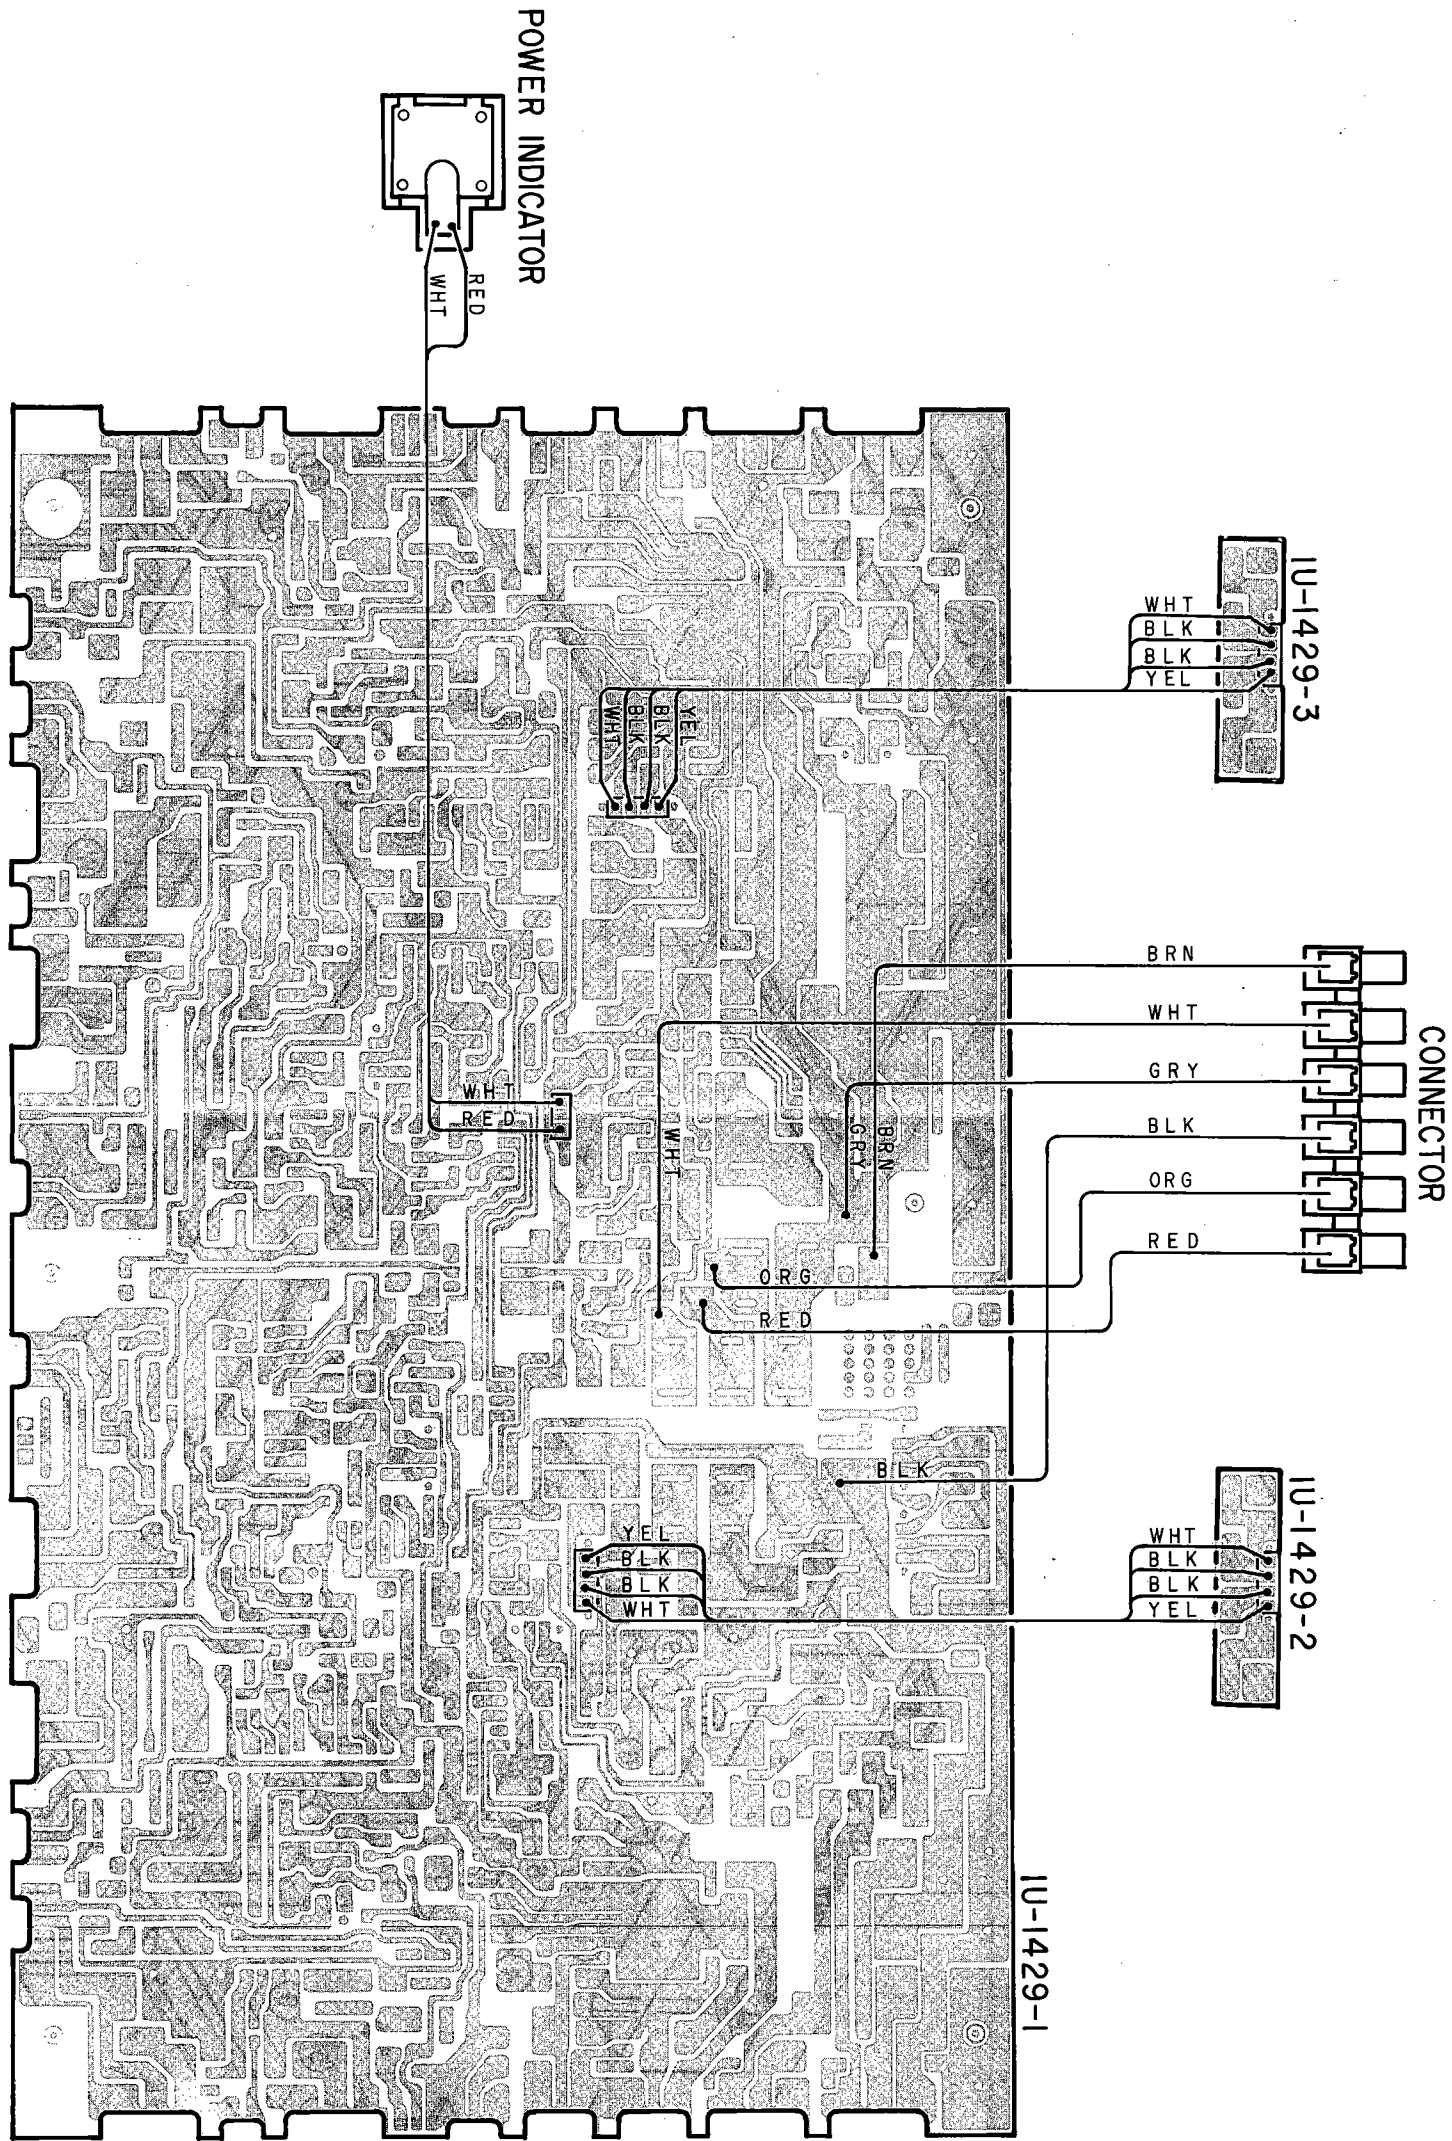

EXPLODED VIEW (for DCA-3500)

1

2

3

4

5

6

7

8


A

B

C

D

E

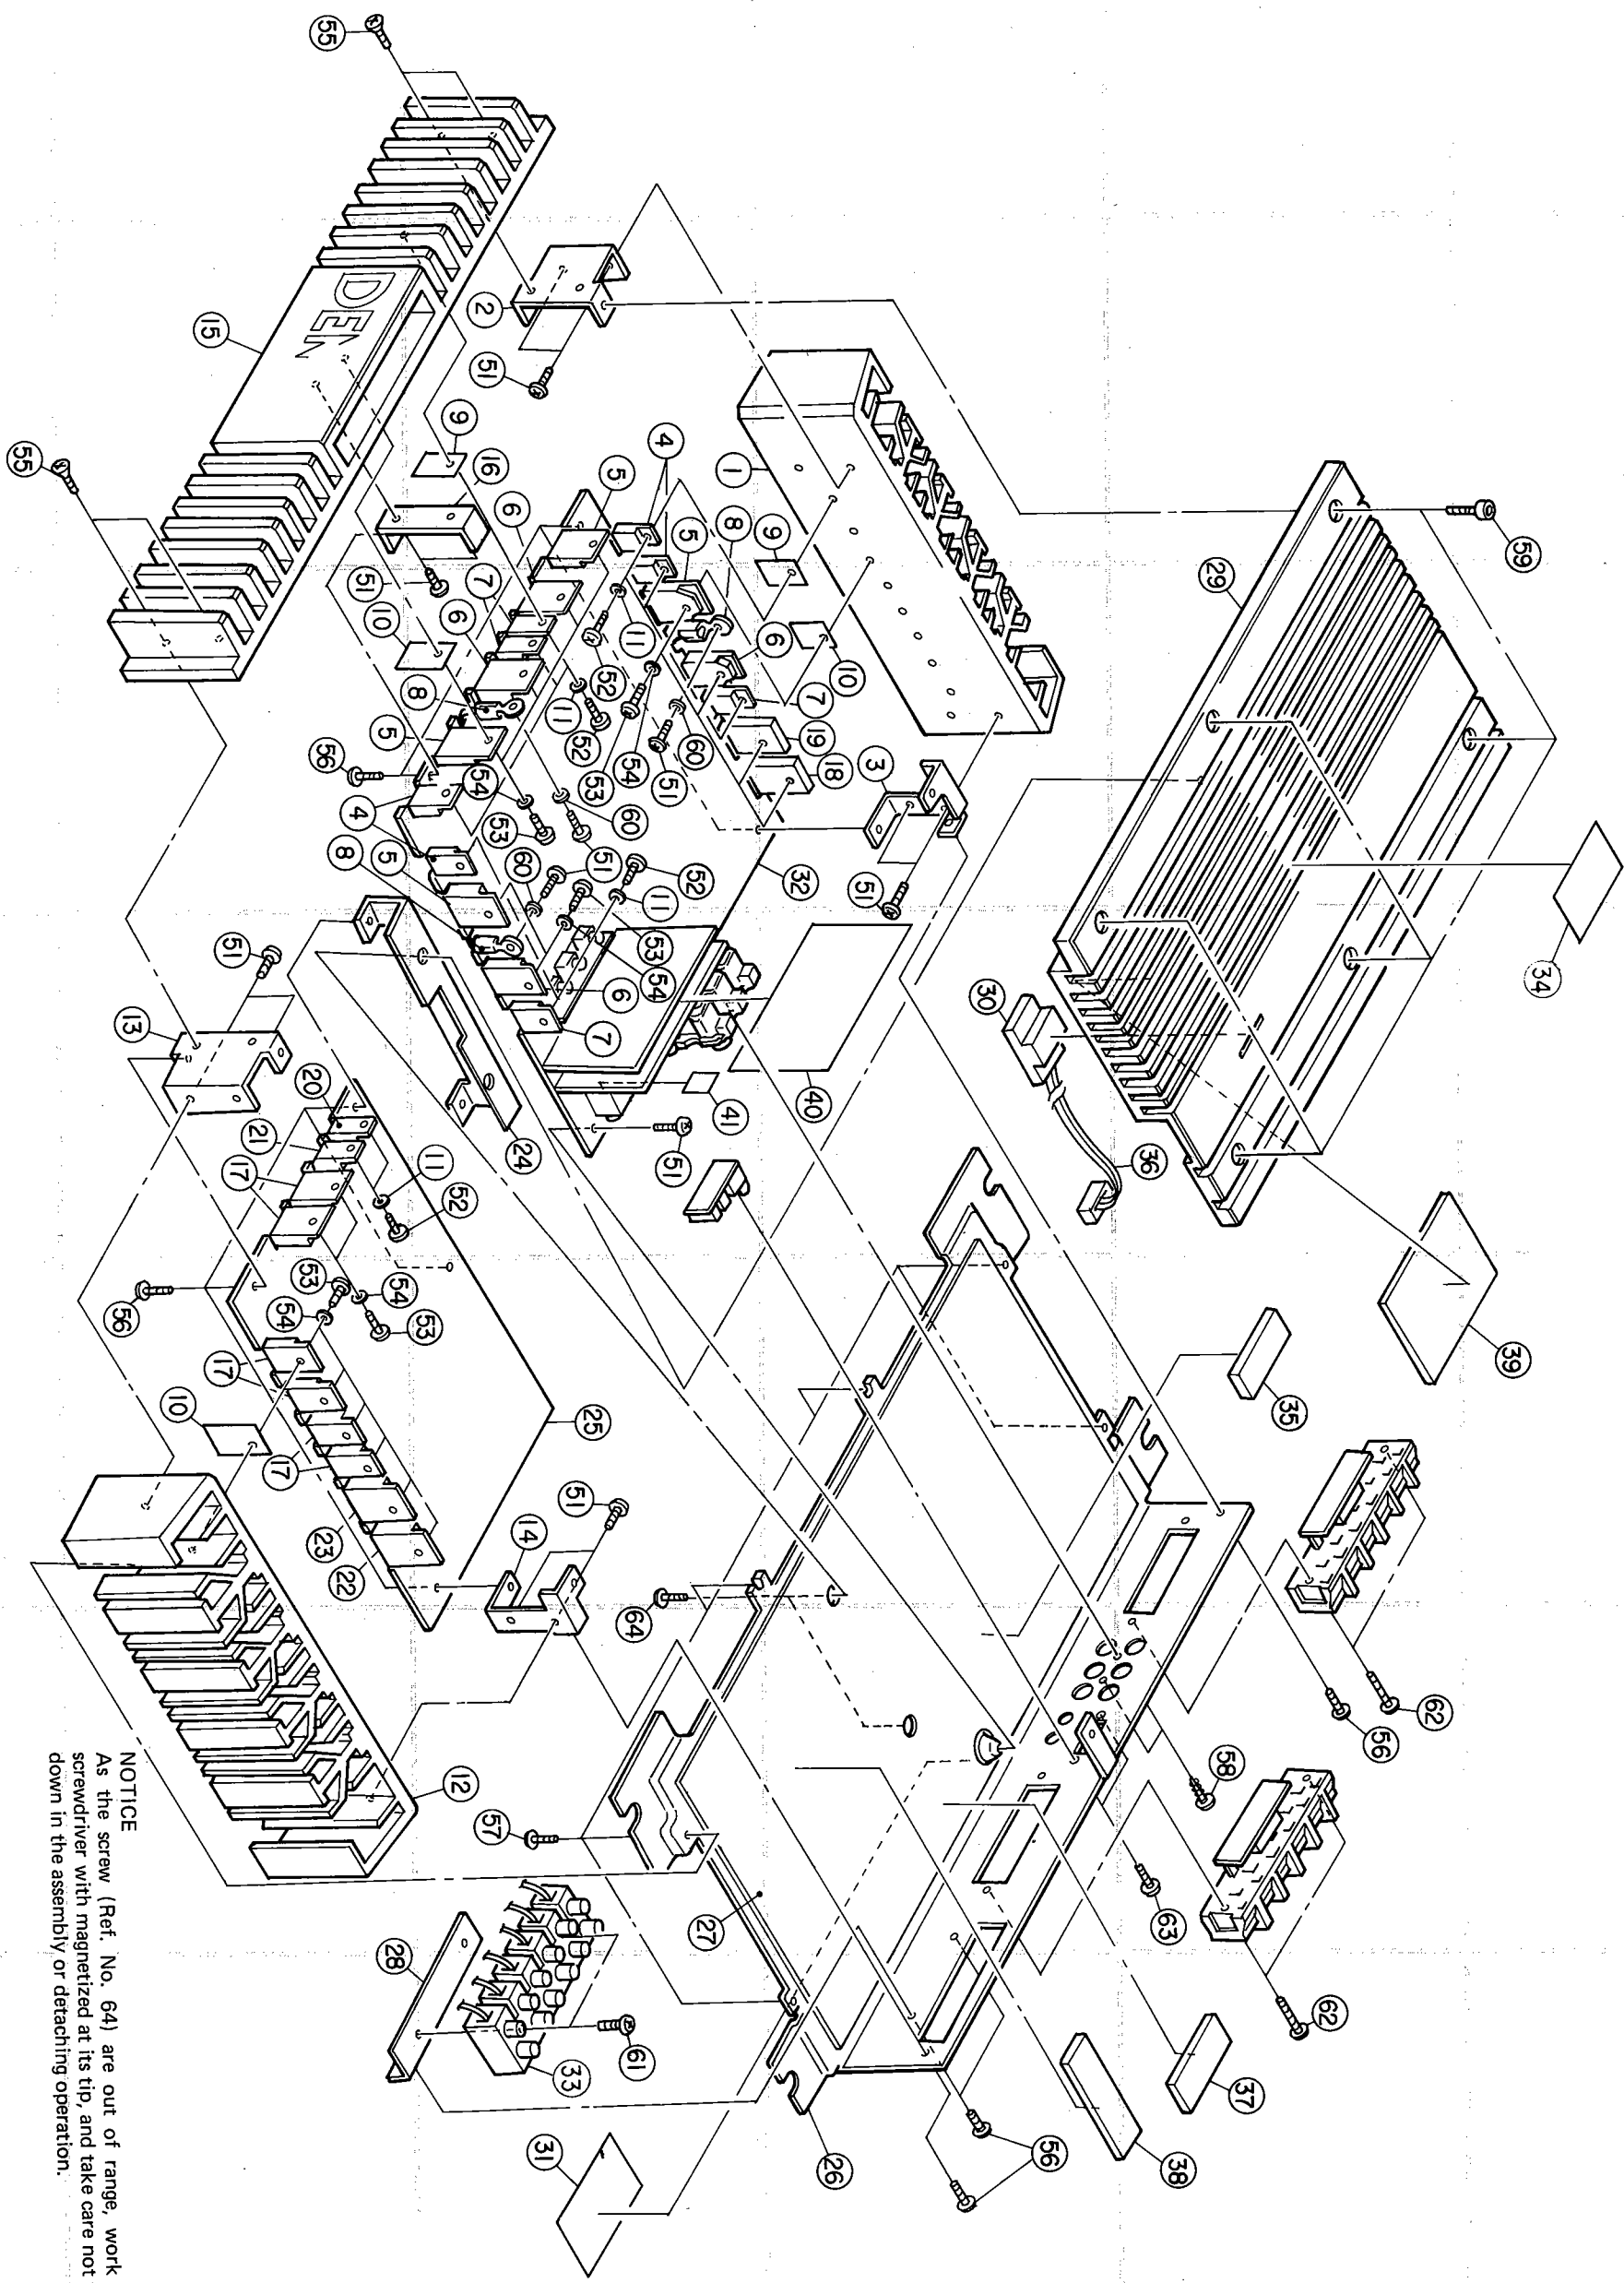

EXPLODED VIEW OF PARTS LIST (for DCA-3500)

Ref. No.	Address	Part No.	Part Name & Descriptions	Q'ty
1	2-D	4170290005	HEAT SINK L	1
2	2-D	4122133000	STAY A	1
3	3-C	4122158001	STAY C	1
4	2-D	2730240028	TRANSISTOR	4
5	2-D	2730336013	2SC2238(Y)/(O)LB110A TRANSISTOR	4
6	2-D	2710204013	2SC3854(O)/(Y)LB TRANSISTOR	4
7	3-C	2710140025	2SA1490(O)/(Y)LB TRANSISTOR	4
8	2-D	2760416000	2SA968(Y)/(O)LB110A POSISTOR	3
9	2-C	4150347004	PTH487A01BC471TS INSULATING SHEET	10
10	3-C	4150234007	INSULATING SHEET	18
11	3-D	4150181008	WASHER (B-17)	10
12	6-D	4170291004	HEAT SINK R	1
13	4-E	4122134009	STAY B	1
14	5-D	4122159000	STAY D	1
15	2-E	4170286103	HEAT SINK F	1
16	2-D	4122135008	FRONT STAY	1
17	4-E	2740113019	TRANSISTOR	6
18	3-C	2710219008	2SD1065(S)LB TRANSISTOR	1
19	3-C	2730353009	2SA1227A(Q)IL TRANSISTOR	1
20	4-E	2760415001	2SC2987A(Q)IL DIODE CTU-22S LB	1
21	4-E	2760415014	DIODE CTU-22R LB	1
22	5-E	2760487000	DIODE CUT-32S LB	1
23	5-E	2760488009	DIODE CTU-32R LB	1
24	4-D	4170287102	RADIATOR	1
25	5-D	1U-1432	POWER SUPPLY UNIT	1s
26	7-C	4110649108	BOTTOM PLATE	1
27	6-D	4150372008	INSULATING SHEET	1
28	6-E	4410790003	TERMINAL BRACKET	1
29	3-B	1441609001	TOP PANEL ASS'Y	1
30	4-C	3939281007	SLF-101C LED	1
31	7-D	5131240022	RATING SHEET	1
32	3-C	1U-1453	POWER AMP UNIT	1s
33	7-D	2050393008	6P TERMINAL BLOCK	1
34	4-A	5131269003	ADJUSTMENT SHEET	1
35	5-B	4610329038	RUBBER SHEET	1
36	4-B	2034313075	3P EH CONNECTOR CORD	1
37	7-B	4610329041	RUBBER SHEET	1
38	7-B	4610329054	RUBBER SHEET	1
39	5-A	4610329067	RUBBER SHEET	1
40	4-C	4150398008	INSULATING SHEET	1
41	4-D	4150401105	INSULATING SHEET	1
SCREWS				
51	2-D	4737005073	TAPPING SCREW (S) 3x5	14
52	3-D	4700010008	PAN SCREW WITH S.W 3x8	10
53	3-D	4737005002	TAPPING SCREW (S) 3x10	18
54	3-D	4752003005	SPRING WASHER ϕ 3	18
55	1-E	4712305028	F. HEAD SCREW 3x10 BLACK	4
56	3-E	4737002034	TAPPING SCREW (S) 3x6	11
57	6-D	4770064107	FIXING SCREW	6
58	6-B	4737500044	TAPPING SCREW (P) 3x8 BLACK	2
59	2-A	4755109003	HEX. SCREW 4x6	6
60	3-D	4751003006	WASHER ϕ 3	3
61	7-D	4737005028	TAPPING SCREW (S) 3x14	2
62	6-B	4737007026	TAPPING SCREW (S) 4x16 BLACK	4
63	6-B	4713201024	BIND SCREW 2.6x4	2
64	6-D	4737500002	TAPPING SCREW (P) 3x6	2

Ref. No.	Address	Part No.	Part Name & Descriptions	Q'ty
PACKING & ACCESSORIES (not including EXPLODED VIEW)				
101		5050061007	ENVELOPE	1
102		5111500009	INST. MANUAL	1
103		5150333004	GUARANTEE CARD	1
104		5150337107	CUSTOM CARD	1
105		5050076115	POLYCOVER	1
106		4700022009	PAN SCREW WITH SW 4x16	4
107		4751005004	WASHER ϕ 4	4
108		SC-1050H	NUT	4
109		4718006004	TAPPING SCREW (1) 4x12	4
110		5050099040	POLY COVER	1
111		5030596000	CUSHION	2
112		5011158001	INDIVIDUAL CARTON	1
113		5011159000	MASTER CARTON	1/3

Note: Parts with * marks are not shown in the exploded view.

EXPLODED VIEW OF PARTS LIST (for DCA-3400)

Ref. No.	Address	Part No.	Part Name & Descriptions	Q'ty
1	3-B	4170282000	HEAT SINK L	1
2	2-D	4122133000	STAY A	1
3	3-D	2730240028	TRANSISTOR 2SC2238(Y)/(O)LB110A	4
4	3-D	2730336013	TRANSISTOR 2SC3854(O)/(Y)LB	4
5	3-C	2710204013	TRANSISTOR 2SA1490(O)/(Y)LB	4
6	3-C	2710140025	TRANSISTOR 2SA968(Y)/(O)LB110A	4
7	3-C	4150347004	INSULATING SHEET	12
8	3-C	4150234007	INSULATING SHEET	12
9	4-D	4150181008	WASHER (B-17)	12
10	6-D	4170283009	HEAT SINK R	1
11	3-E	4122134009	STAY B	1
12	2-E	4120284105	HEAT SINK F	1
13	2-D	4122135008	FRONT STAY	1
14	3-C	2740113019	TRANSISTOR 2SD1065(S)LB	4
15	3-C	2760415001	DIODE CTU-22S LB	2
16	3-C	2760415014	DIODE CTU-22R LB	2
17	5-D	1U-1429	AMP UNIT	1s
18	7-E	4410790003	TERMINAL BRACKET	1
19	6-D	4110640107	BOTTOM PLATE	1
20	7-D	4150367000	INSULATING SHEET	1
21	3-B	1441589008	TOP PANEL ASS'Y	1
22	4-C	3939281007	SLF-101C LED	1
23	7-D	5131240019	RATING SHEET	1
24	4-C	4122158001	STAY C	1
25	5-D	4122159000	STAY D	1
26	3-D	2760416000	POSISTOR PTH487A01BC471TS	3
27	7-D	2050393008	6P TERMINAL BLOCK	1
28	4-A	5131256003	ADJUSTMENT SHEET	1
29	4-A	4610329009	RUBBER SHEET	2
30	4-D	4610329012	RUBBER SHEET (for TL202 UP)	1
31	4-D	4610329025	RUBBER SHEET (for TL201 UP)	1
32	5-B	2034308022	3P CONNECTOR CORD	1
33	7-C	4610329038	RUBBER SHEET	2
SCREWS				
51	2-D	4737005073	TAPPING SCREW (S) 3x5	14
52	4-D	4700010008	PAN SCREW WITH S.W 3x8	12
53	3-D	4737005002	TAPPING SCREW (S) 3x10	12
54	3-D	4752003005	SPRING W. ϕ 3	12
55	4-E	4737002018	TAPPING SCREW (2) 3x8	5
56	1-E	4712305028	F. SCREW 3x10 B	4
57	6-B	4737500044	TAPPING SCREW (P) 3x8 B	1
58	3-A	4755109003	HEX. SCREW 4x6	6
59	3-D	4751003006	WASHER ϕ 3	3
60	7-D	4737005028	TAPPING SCREW (S) 3x14	2
61	6-B	4737002034	TAPPING SCREW (S) 3x6-B	4
62	6-B	4737007026	TAPPING SCREW (S) 4x16-B	4
63	6-D	4770064107	FIXING SCREW	6
64	2-D	4751003019	WASHER ϕ 3-B	2
PACKING & ACCESSORIES (not including EXPLODED VIEW)				
101		5050061007	ENVELOPE	1
102		5111497002	INST. MANUAL	1
103		5150333004	GUARANTEE CARD	1
104		5150337107	CUSTOM CARD	1
105		5050076115	POLYCOVER	1
106		4700022009	PAN SCREW 4x16	4
107		4751005004	WASHER ϕ 4	4
108		SC-1050H	NUT	4
109		4718006004	TAPPING SCREW (1) 4x12	4
110		5050099040	POLYCOVER	1
111		5030596000	CUSHION	2
112		5011156003	INDIVIDUAL CARTON	1
113		5011157002	MASTER CARTON	1/3
114		5290044004	MINI DRIVER	1
115				

Note: Parts with * marks are not shown in the exploded view.

EXPLODED VIEW (for DCA-3400)

1

2

3

5

6

7

8


A

B

C


D

E

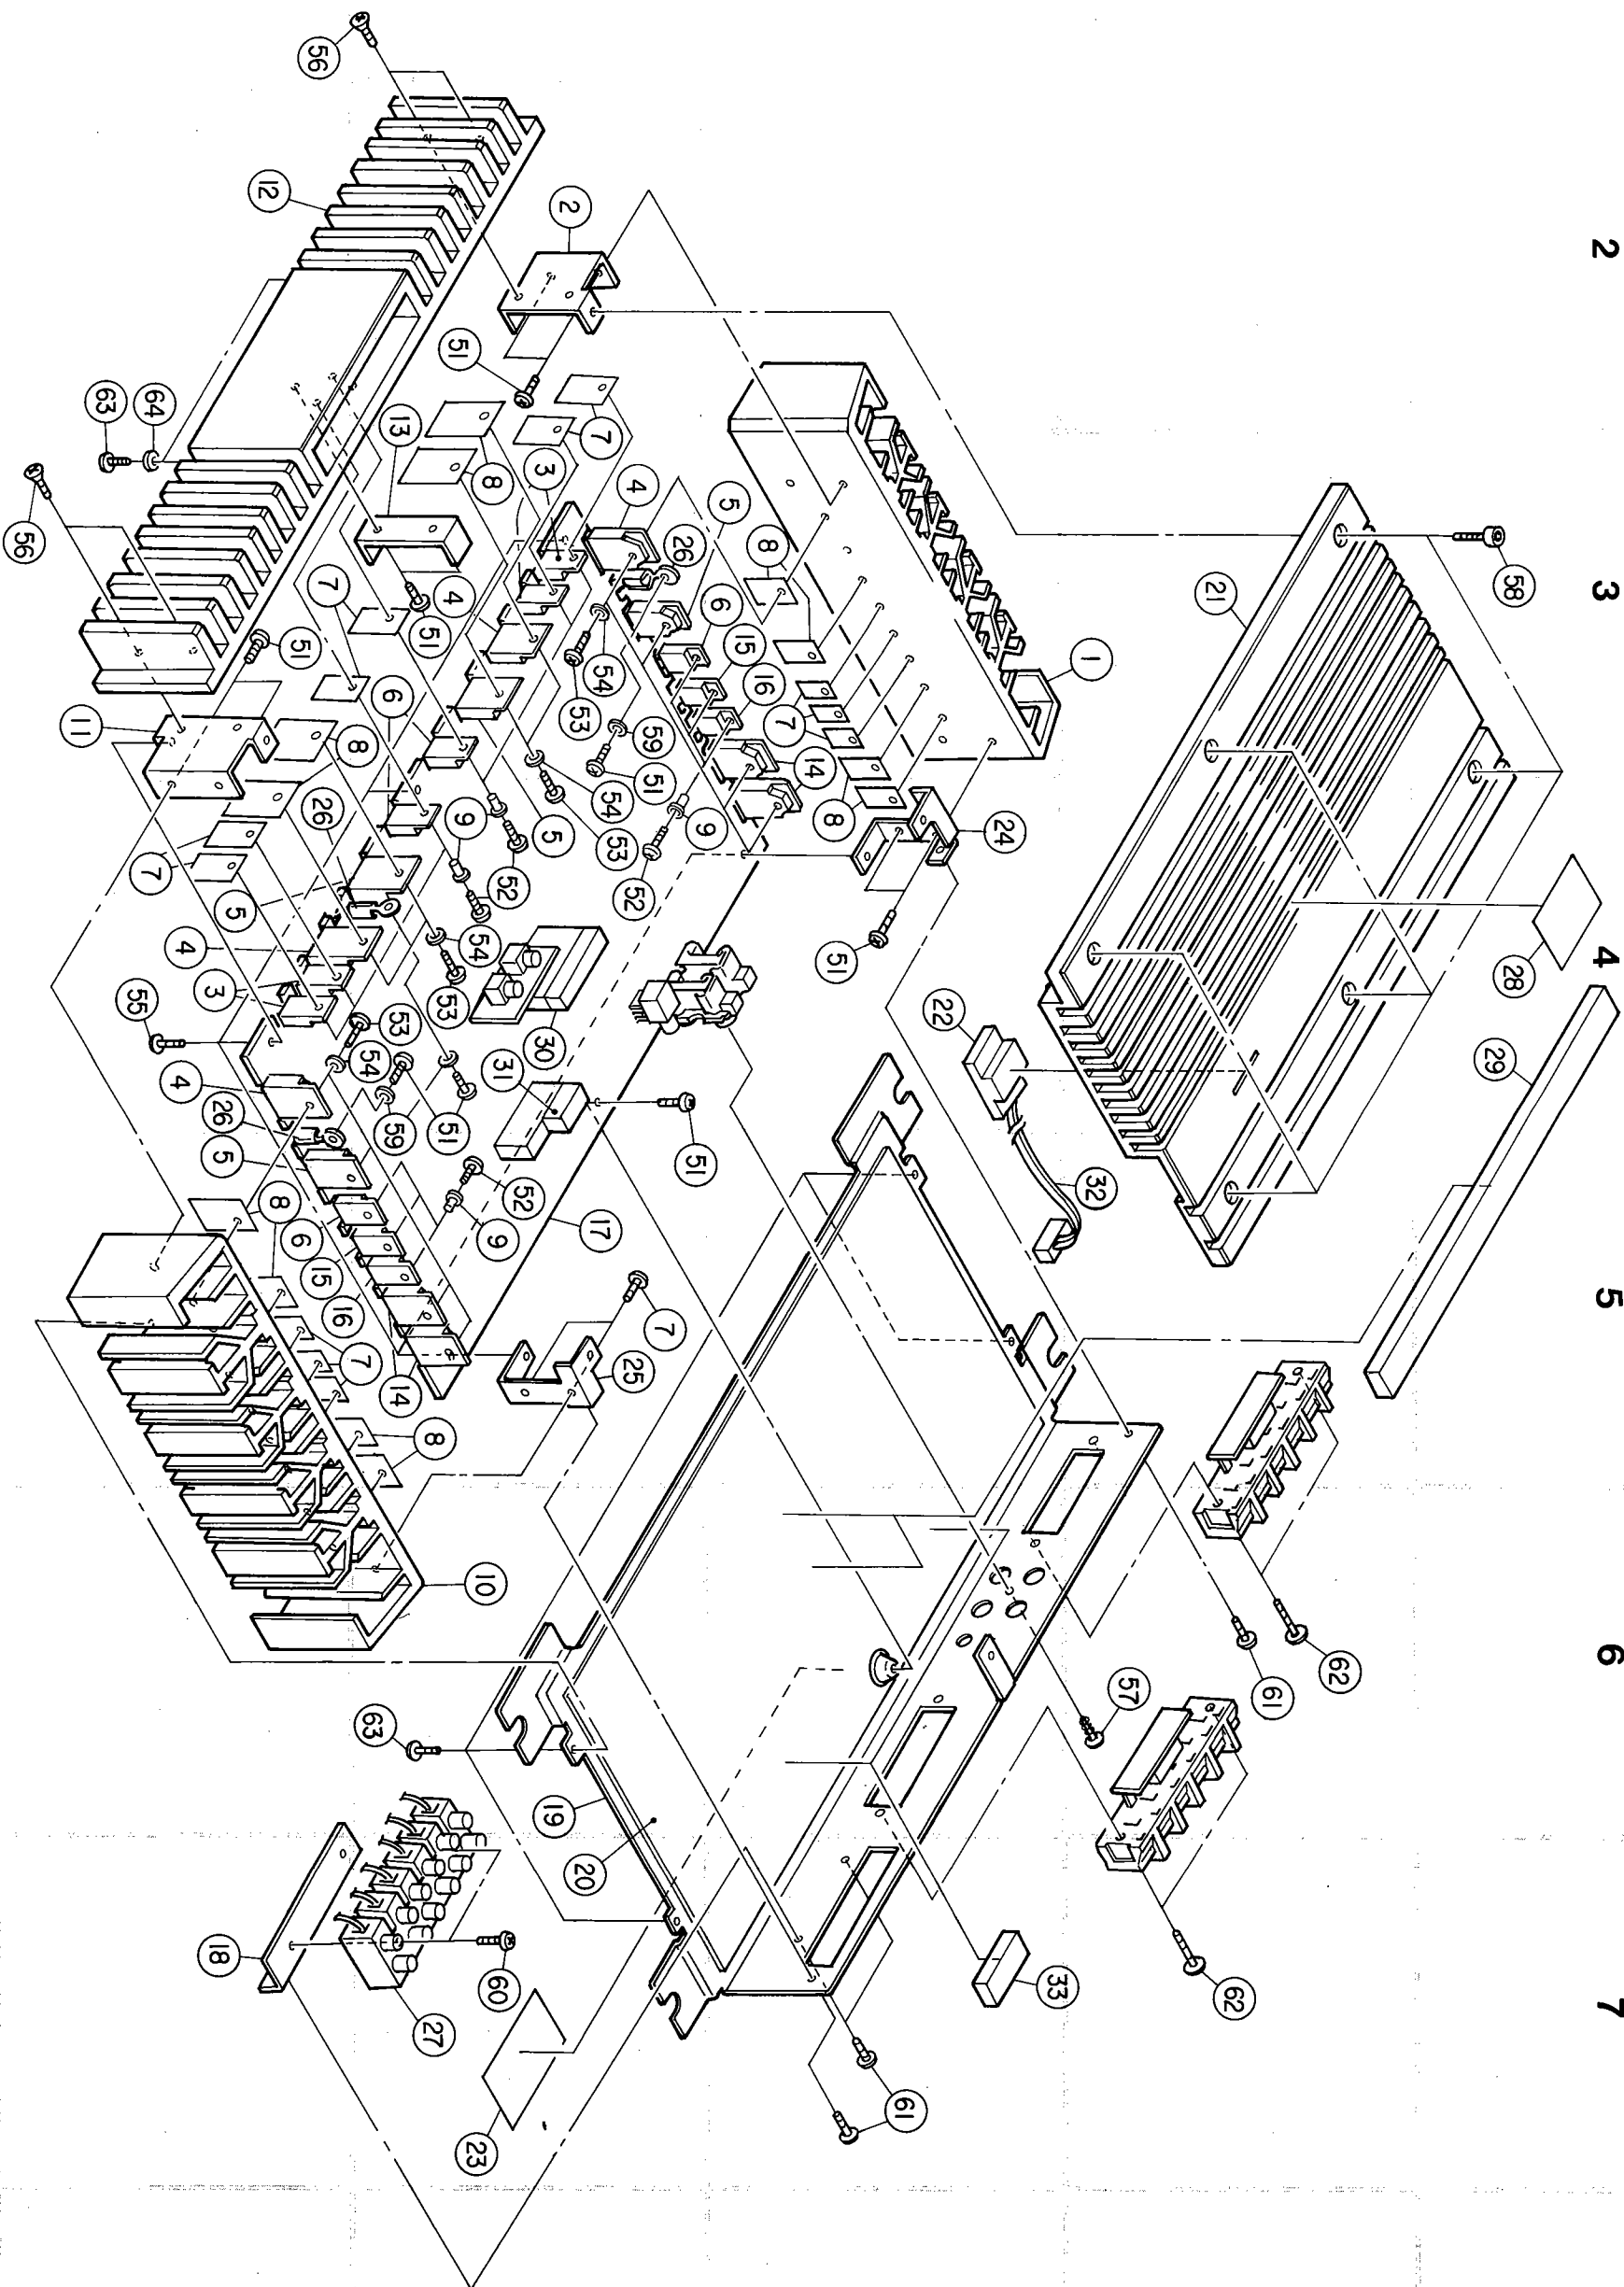

REMOVAL OF EACH SECTIONS

• DCA-3500

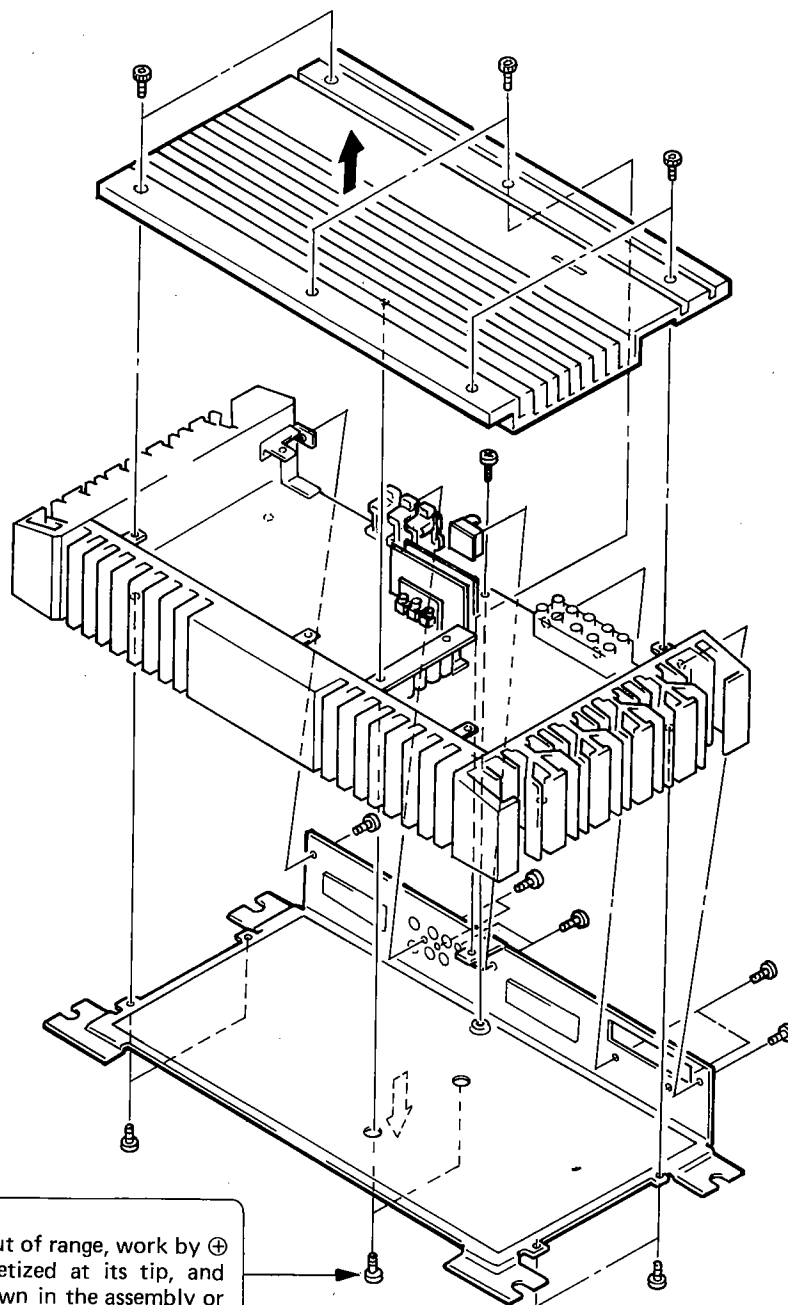**NOTICE**


As these 2 screws are out of range, work by ⊕ screwdriver with magnetized at its tip, and take care not to fall down in the assembly or detaching operation.

PRECAUTIONS

1. DENON Power Amplifier DCA-3500 and 3400 is only available for use in negative (−) ground automobiles. It cannot be used positive (+) ground automobiles.
2. DENON Power Amplifier DCA-3500 and 3400 will operate properly with 14.4 V (11 V–16 V) car batteries. You cannot use it for 24 V or other types of car batteries.
3. For fuse replacement, replace only with same amperage as old one. Improper fuses can lead to serious damage to the unit. (Accessible by removing the top panel.)
4. Do not allow any liquid or small objects to get inside the unit.

DENON


• DCA-3400

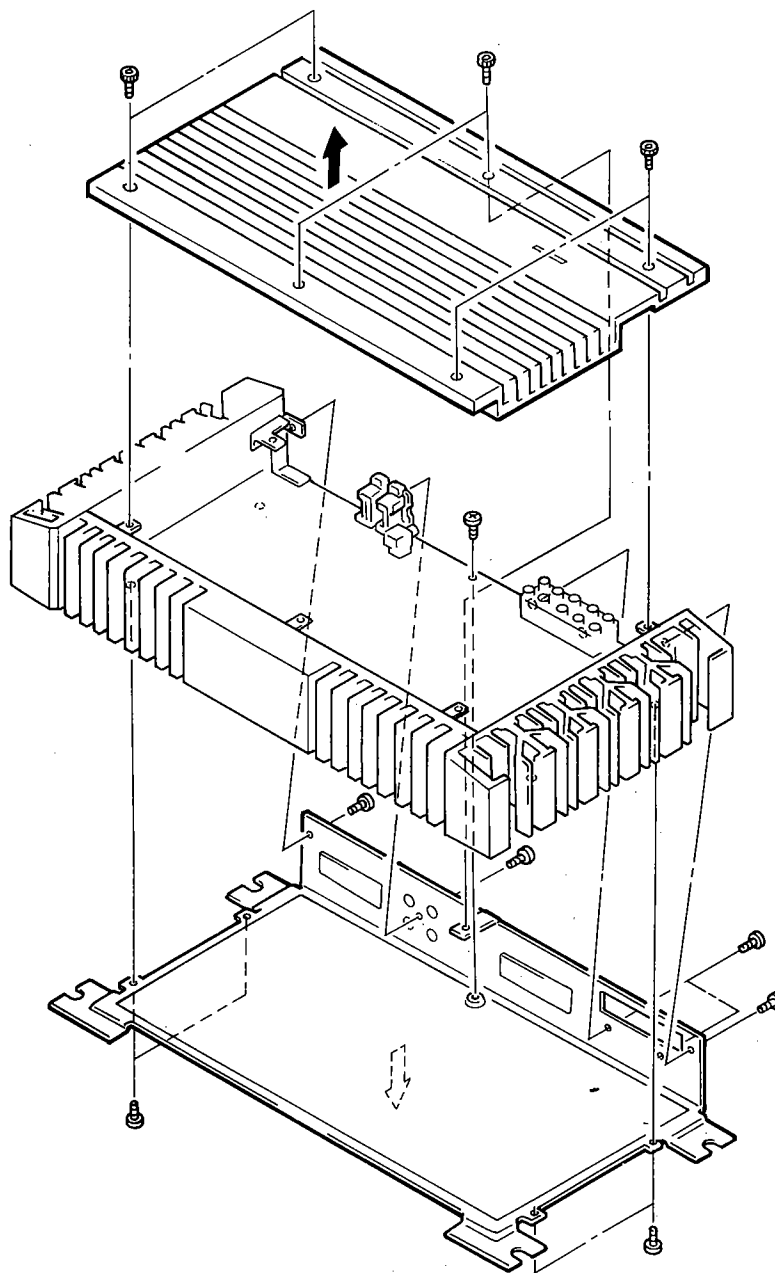

NIPPON COLUMBIA CO., LTD.
14-14, 4-CHOME AKASAKA,
MINATO-KU, TOKYO 107 JAPAN


TEL: 03-584-8111
TLX: JAPANOLA J22591
CABLE: NIPPONCOLUMBIA TOKYO

Printed in Japan 703 **BU** 0056



SCHEMATIC DIAGRAM (DCA-3400)

	1	2	3	4	5	6	7	8	9	10	11
A	IC	IC1 IC101 IC2 IC102	IC3 IC103 IC4 IC104	IC5 IC6 IC201							
					TR1	TR3 TR7 TR9	TR11	TR305 TR306	TR301 TR302	TR303	
	Transistor				TR101 TR2 TR102	TR107 TR103 TR4 TR8 TR108 TR104 TR105 TR106 TR109 TR110	TR111 TR12 TR112	TR353 TR354	TR351 TR352	TR304	
			TR201								
B	Diode (Including LED)	D3 D5 D103 D105 D106 D4 D6 D104 D106 D106	D1 D3 D101 D103 D2 D4 D102 D104 D201 D202	D11 D111 D12 D112	D13 D15 D17 D19 D21 D23 D113 D115 D117 D119 D121 D123 D14 D16 D18 D20 D22 D24 D14 D16 D18 D20 D22 D24	D25 D125 D26 D126 D203 D204 D205 D206	D301 D354	D303 D304 D305 D301 D351 D352 D353			

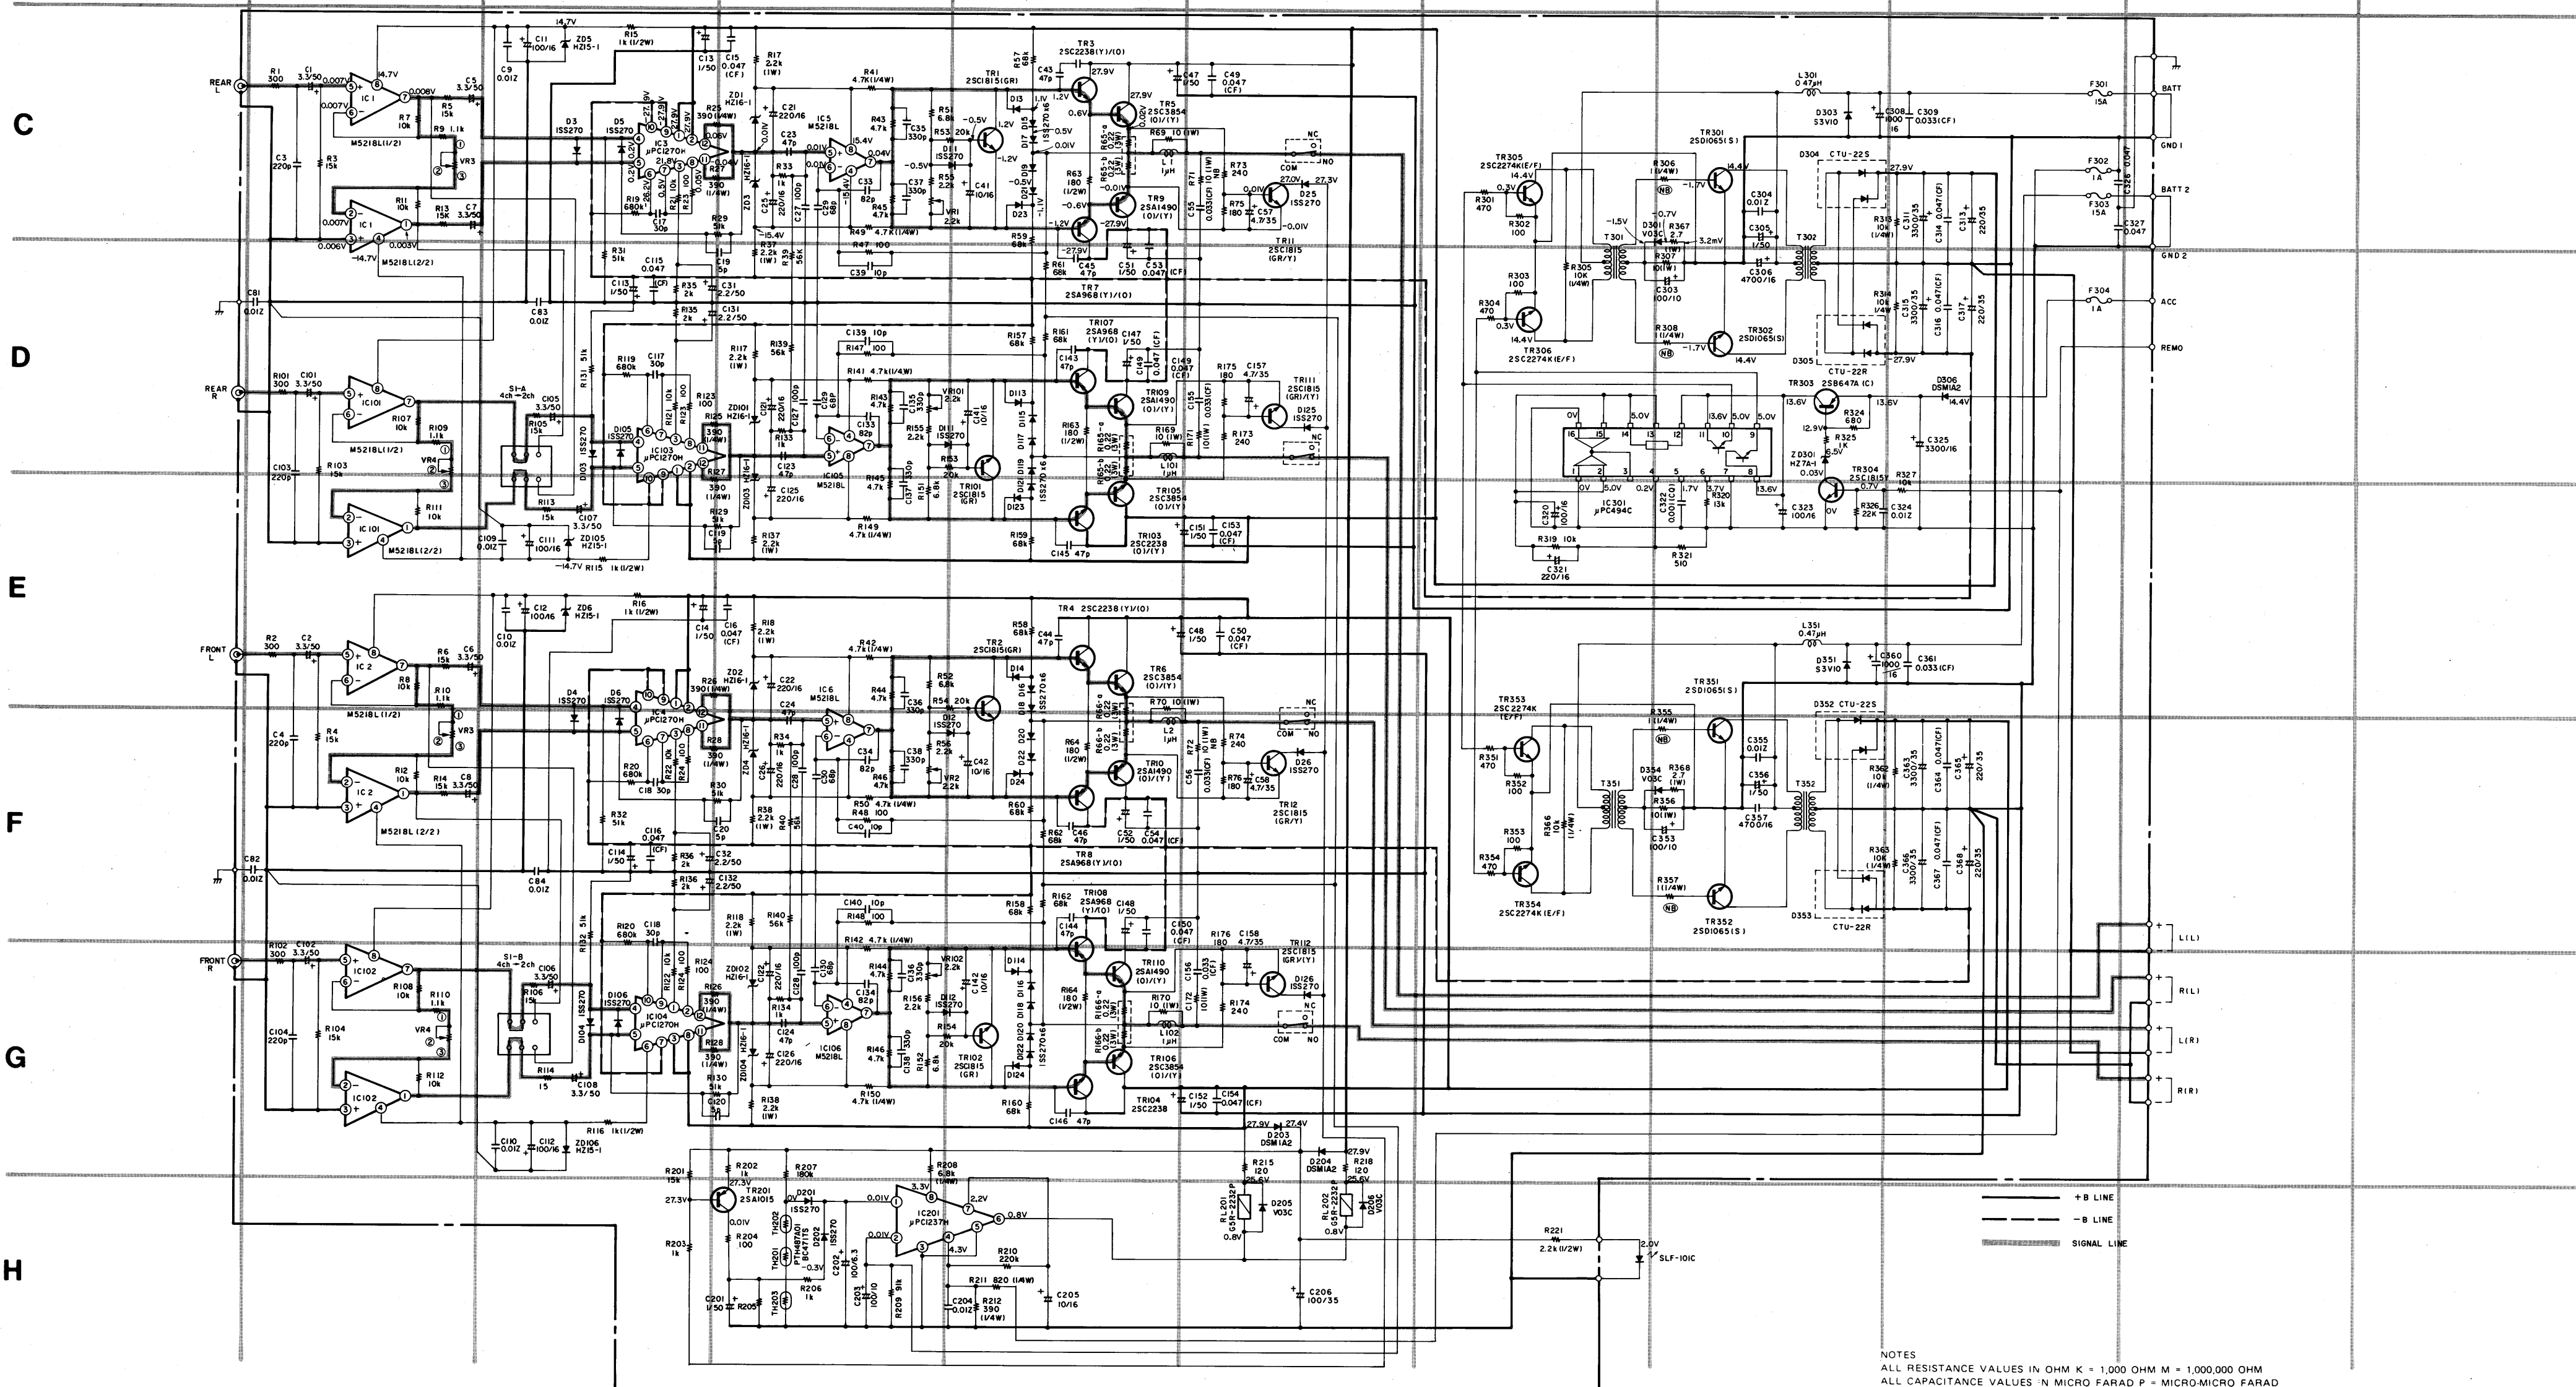

NOTES
ALL RESISTANCE VALUES IN OHM K = 1,000 OHM M = 1,000,000 OHM
ALL CAPACITANCE VALUES :N MICRO FARAD P = MICRO-MICRO FARAD
EACH VOLTAGE AND CURRENT ARE MEASURED AT NO SIGNAL INPUT CONDITION.
CIRCUIT AND PARTS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.